

**EVALUATION OF
MICROWAVE TRAFFIC DETECTOR**

Final Report

Project 304-021

**EVALUATION OF
MICROWAVE TRAFFIC DETECTOR
AT THE
CHEMAWA ROAD/INTERSTATE 5 INTERCHANGE**

Final Report

PROJECT 304-021

by

Rob Edgar
Research Group

for

Oregon Department of Transportation
Research Group
200 Hawthorne SE, Suite B-240
Salem OR 97301-5192

and

Federal Highway Administration
Washington, D.C.

April 2002

| | | | | | |
|---|--|--|---|--|-----------|
| 1. Report No. FHWA-OR-DF-02-05 | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle EVALUATION OF MICROWAVE TRAFFIC DETECTOR AT CHEMAWA RD/I-5 INTERCHANGE Final Report | | | | 5. Report Date April 2002 | |
| | | | | 6. Performing Organization Code | |
| 7. Author(s) Rob Edgar, Research Coordinator ODOT Research Group | | | | 8. Performing Organization Report No. | |
| 9. Performing Organization Name and Address Oregon Department of Transportation Research Group 200 Hawthorne SE, Suite B-240 Salem, Oregon 97301-5192 | | | | 10. Work Unit No. (TRAIS) | |
| | | | | 11. Contract or Grant No. State Discretionary 304-021 | |
| 12. Sponsoring Agency Name and Address Oregon Department of Transportation Research Group and Federal Highway Administration 200 Hawthorne SE, Suite B-240 Washington, D.C. Salem, Oregon 97301-5192 | | | | 13. Type of Report and Period Covered Final Report | |
| | | | | 14. Sponsoring Agency Code | |
| 15. Supplementary Notes | | | | | |
| 16. Abstract In 2001, the Oregon Department of Transportation installed a microwave traffic detection sensor, and compared it's performance to conventional inductive traffic loops. The objective of the study was to evaluate the capabilities of the microwave traffic detection sensor to function as a viable detection device in a signalized intersection. The sensor was to detect vehicles in advance of the intersection, providing "extension" and "call" functions for the signal controller. The microwave detector provides a non-intrusive method of detection and the need to cut grooves is eliminated. The microwave can be installed and maintained from the shoulder area with lower impact on the motorist. Safety for highway workers is also improved. The Remote Traffic Microwave Sensor was installed and traffic counts made over four weeks. The microwave sensor generally counted lower than the traffic loops. Potential errors for various traffic conditions for both the inductive loops and the microwave sensor were identified and analyzed. Although the counts differ, the microwave provide reasonable detection for the extension and call functions. This study did not look at long term performance or cost benefits of the detector. | | | | | |
| 17. Key Words MICROWAVE, TRAFFIC DETECTION, TRAFFIC SENSOR | | | 18. Distribution Statement Copies available from NTIS, and online at http://www.odot.state.or.us/tddresearch | | |
| 19. Security Classification (of this report) Unclassified | | 20. Security Classification (of this page) Unclassified | | 21. No. of Pages | 22. Price |


SI* (MODERN METRIC) CONVERSION FACTORS

APPROXIMATE CONVERSIONS TO SI UNITS

| Symbol | When You Know | Multiply By | To Find | Symbol |
|--|------------------------|-------------|---------------------|-----------------|
| <u>LENGTH</u> | | | | |
| In | Inches | 25.4 | Millimeters | Mm |
| Ft | Feet | 0.305 | Meters | M |
| Yd | Yards | 0.914 | Meters | M |
| Mi | Miles | 1.61 | Kilometers | Km |
| <u>AREA</u> | | | | |
| in ² | Square inches | 645.2 | millimeters squared | mm ² |
| ft ² | Square feet | 0.093 | meters squared | M ² |
| yd ² | Square yards | 0.836 | meters squared | M ² |
| Ac | Acres | 0.405 | Hectares | Ha |
| mi ² | Square miles | 2.59 | kilometers squared | Km ² |
| <u>VOLUME</u> | | | | |
| fl oz | Fluid ounces | 29.57 | Milliliters | ML |
| Gal | Gallons | 3.785 | Liters | L |
| ft ³ | Cubic feet | 0.028 | meters cubed | m ³ |
| yd ³ | Cubic yards | 0.765 | meters cubed | m ³ |
| NOTE: Volumes greater than 1000 L shall be shown in m ³ . | | | | |
| <u>MASS</u> | | | | |
| Oz | Ounces | 28.35 | Grams | G |
| Lb | Pounds | 0.454 | Kilograms | Kg |
| T | Short tons (2000 lb) | 0.907 | Megagrams | Mg |
| <u>TEMPERATURE (exact)</u> | | | | |
| °F | Fahrenheit temperature | 5(F-32)/9 | Celsius temperature | °C |

APPROXIMATE CONVERSIONS FROM SI UNITS

| Symbol | When You Know | Multiply By | To Find | Symbol |
|-----------------------------------|---------------------|-------------|----------------------|-----------------|
| <u>LENGTH</u> | | | | |
| mm | Millimeters | 0.039 | inches | in |
| m | Meters | 3.28 | feet | ft |
| m | Meters | 1.09 | yards | yd |
| km | Kilometers | 0.621 | miles | mi |
| <u>AREA</u> | | | | |
| mm ² | millimeters squared | 0.0016 | square inches | in ² |
| m ² | meters squared | 10.764 | square feet | ft ² |
| ha | Hectares | 2.47 | acres | ac |
| km ² | kilometers squared | 0.386 | square miles | mi ² |
| <u>VOLUME</u> | | | | |
| mL | Milliliters | 0.034 | fluid ounces | fl oz |
| L | Liters | 0.264 | gallons | gal |
| m ³ | meters cubed | 35.315 | cubic feet | ft ³ |
| m ³ | meters cubed | 1.308 | cubic yards | yd ³ |
| <u>MASS</u> | | | | |
| g | Grams | 0.035 | ounces | oz |
| kg | Kilograms | 2.205 | pounds | lb |
| Mg | Megagrams | 1.102 | short tons (2000 lb) | T |
| <u>TEMPERATURE (exact)</u> | | | | |
| °C | Celsius temperature | 1.8C + 32 | Fahrenheit | °F |

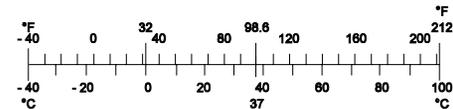

* SI is the symbol for the International System of Measurement

DISCLAIMER

This document is disseminated under the sponsorship of the Oregon Department of Transportation and the United States Department of Transportation in the interest of information exchange. The State of Oregon and the United States Government assume no liability of its contents or use thereof.

The contents of this report reflect the view of the authors who are solely responsible for the facts and accuracy of the material presented. The contents do not necessarily reflect the official views of the Oregon Department of Transportation or the United States Department of Transportation.

The State of Oregon and the United States Government do not endorse products of manufacturers. Trademarks or manufacturers' names appear herein only because they are considered essential to the object of this document.

This report does not constitute a standard, specification, or regulation.

EVALUATION OF MICROWAVE TRAFFIC DETECTOR AT CHEMAWA RD/I-5 INTERCHANGE

TABLE OF CONTENTS

| | |
|---|-----------|
| 1.0 INTRODUCTION..... | 1 |
| 1.1 BACKGROUND..... | 1 |
| 1.2 OBJECTIVES | 1 |
| 1.3 SENSOR INSTALLATION AND LAYOUT | 1 |
| 1.4 GENERAL OPERATING PARAMETERS | 2 |
| 2.0 DATA AND ANALYSIS | 3 |
| 2.1 TRAFFIC COUNTS | 3 |
| 2.2 DESCRIPTIVE STATISTICS | 6 |
| 2.3 POTENTIAL ERROR COUNTS | 10 |
| 2.4 FIELD COUNTS | 11 |
| 2.5 IMPACT ON SIGNAL TIMING PHASE | 11 |
| 3.0 CONCLUSIONS AND RECOMMENDATIONS..... | 13 |
| 3.1 CONCLUSIONS..... | 13 |
| 4.0 REFERENCES..... | 15 |

APPENDIX: TRAFFIC COUNT DATA

LIST OF TABLES

| | |
|--|----|
| Table 2.1: Descriptive Statistics for EB Traffic (NB Intersection)..... | 6 |
| Table 2.2: 95% Confidence Intervals for Loops and Microwave Counts | 6 |
| Table 2.3: Potential Errors for Various Traffic Conditions | 10 |
| Table 2.4: Comparison of Visual, Loop and Microwave Traffic Counts..... | 11 |

LIST OF PHOTOS/FIGURES

| | |
|---|---|
| Figure 1.1 Layout of Microwave and Loop Sensors on Chemawa Road | 2 |
| Figure 2.1: Eastbound Traffic Counts (NB Intersection) – Loops vs. Microwave..... | 4 |
| Figure 2.2: Westbound Traffic Counts (SB Intersection) – Loops (series connected) vs. Microwave | 5 |
| Figure 2.3: Inductive Loop Dimensions..... | 7 |
| Figure 2.4: Eastbound Traffic Counts (NB Intersection) - Sorted by Loop Count | 8 |
| Figure 2.5: Eastbound Traffic Counts (NB Intersection) – Percent Difference | 9 |

1.0 INTRODUCTION

1.1 BACKGROUND

In January 2001, the Oregon Department of Transportation (ODOT) installed a microwave traffic detection sensor on Chemawa Road near Salem, where it crosses over Interstate 5 (I-5) at milepoint 260.2. The sensor monitors four travel lanes over a steel reinforced concrete bridge structure. The microwave system is non-intrusive to the road surface and bridge deck.

1.2 OBJECTIVES

The objective of this study was to evaluate the capabilities of a microwave traffic detection sensor to function as a viable detection device in a signalized intersection. To assess the accuracy of the device, traffic counts for the microwave were compared with counts made by inductive traffic loops. Traffic counts would provide an indicator of the microwave's ability to detect vehicles for traffic control purposes.

1.3 SENSOR INSTALLATION AND LAYOUT

The microwave sensor was mounted mid-span of the Chemawa Road structure and situated between two signalized intersections for the I-5 ramps. It detects vehicles about 105 m in advance of the northbound and southbound intersection STOP lines, and provides "Extension" and "Call" functions for the signal controller. The sensor monitors two westbound and two eastbound lanes of traffic.

The device was a Remote Traffic Microwave Sensor (RTMS) manufactured by Electronic Integrated Systems, Inc. It was mounted on a pole 6 m above the road, offset 6.1 m from the nearest travel lane and faced perpendicular to the travel lanes. Because of its position outside the travel lanes, it can be installed with less disruption on traffic movements. The RTMS operates as a side-fired passage detector.

Also located at the Chemawa intersection were conventional inductive loops cut into the pavement at 60 m (westbound) and 77 m (eastbound) from the microwave. The loops also provided Extension and Call functions for the signal controller. The loop counts were used in this study to compare with the microwave counts.

The microwave and loop layout is shown in Figure 1.1. Microwave and loop lane counters are indicated by numbers on the figure.

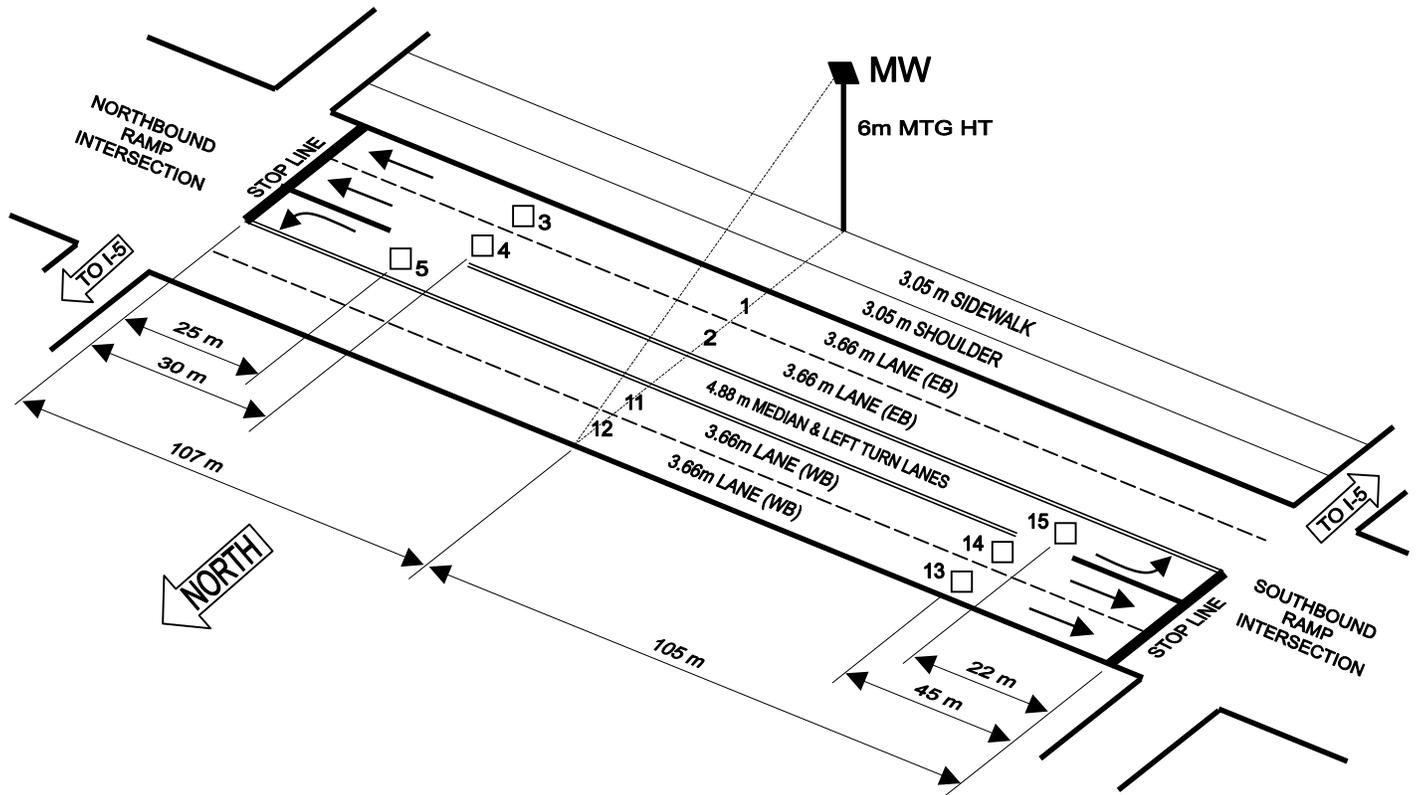


Figure 1.1 Layout of Microwave and Loop Sensors on Chemawa Road

1.4 GENERAL OPERATING PARAMETERS

According to the manufacturers literature, the RTMS can provide eight discrete user-defined detection zones up to 60 m away. The resolution (ability to distinguish between different objects) is about 2 m. Rain, snow, fog and other obstructions smaller than 10 mm should not hinder its detection capabilities. The preferred mounting height ranges from 5 to 10 m, which is controlled in part by the setback from travel lane. Lower mounting heights are recommended for shorter setbacks.

Microwaves can diffract around corners, allowing the RTMS to detect vehicles that are completely hidden by other vehicles with about a 60% success rate. Over-counts can occur in very low speed traffic conditions.

The RTMS can be mounted in a side-firing or forward-facing configuration and set for passage or presence detection modes.

2.0 DATA AND ANALYSIS

2.1 TRAFFIC COUNTS

Traffic counts from the loop and microwave sensors were downloaded from the traffic controller for analysis. The count was accumulated in 15-minute intervals from 6:00am to 8:00pm for four weeks (see appendix for dates).

Figure 2.1 shows the traffic count of all eastbound lanes (traffic headed towards the northbound ramp intersection). The left “bars” show the total count from traffic loops 3, 4 and 5 and compares it to the difference between loop counts and counts of microwave (MW) zones 1 and 2, shown in the right “bars”. Ideally, the difference would be zero, but the graph indicates the microwave counts differ by a range of -28 to +10 vehicles from the loop counts. For the most part, the microwave counts were less than the loop counts.

Similarly, Figure 2.2 shows the traffic count of the westbound lanes (traffic headed towards the southbound ramp intersection). The left bars show the total count from loops 13, 14 & 15 and compares it with the differences between loop counts and the microwave counts for zones 11 and 12, shown in the right bars.

The results are quite different from the eastbound results, as the microwave counts are consistently higher than the loop counts. The difference can be explained by the wiring methods. Westbound loops numbered 13 and 14 are connected in series. This method undercounts the total vehicles since only one vehicle can be detected when two vehicles simultaneously occupy the loop zones. Visual observations by the principal investigator found frequent occurrences of vehicles passing over the adjacent loops simultaneously. The westbound loop counts were not used in the remainder of this study due to the unavoidable undercount.

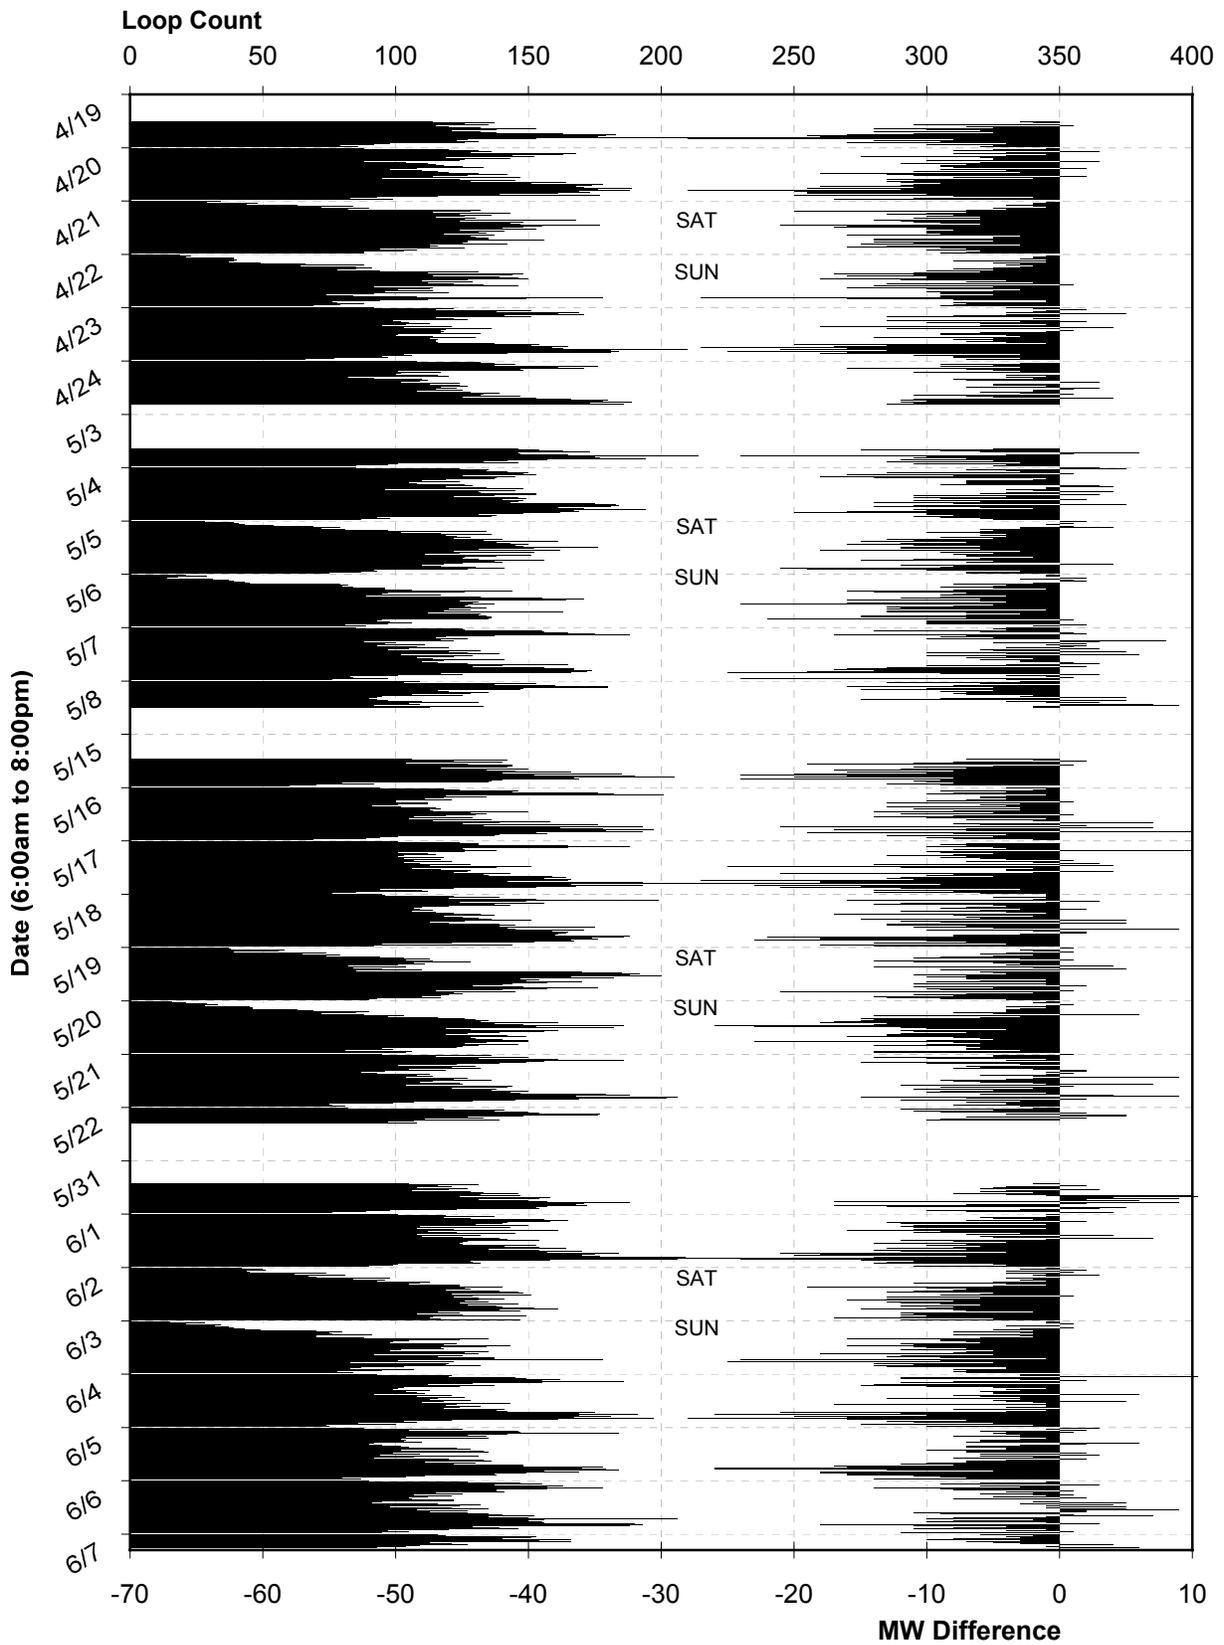


Figure 2.1: Eastbound Traffic Counts (NB Intersection) – Loops vs. Microwave

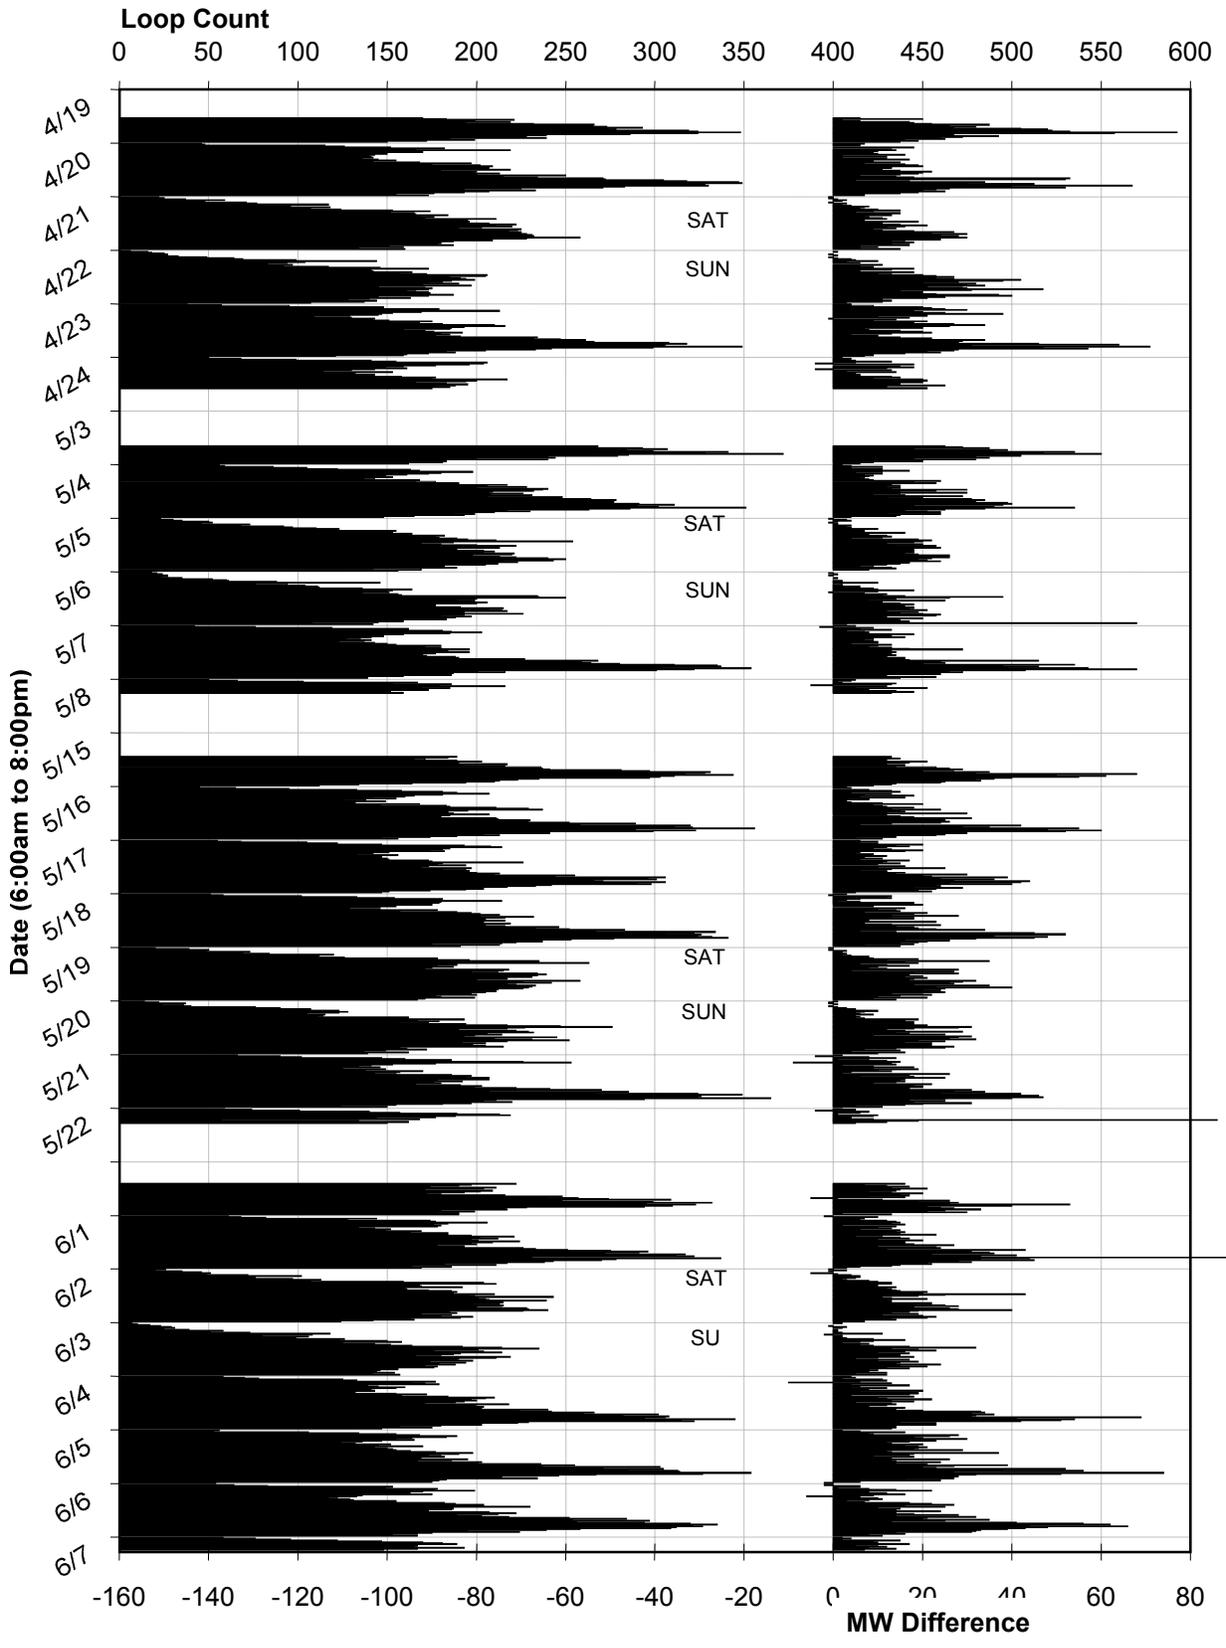


Figure 2.2: Westbound Traffic Counts (SB Intersection) – Loops (series connected) vs. Microwave

2.2 DESCRIPTIVE STATISTICS

The descriptive statistics and quarter intervals for the eastbound (EB) lanes are shown in Table 2.1. For a detailed explanation of the derivation of statistical values, see Appendix B.

Table 2.1: Descriptive Statistics for EB Traffic (NB Intersection)

| | n | Mean | Median | Standard Deviation | s.e. | Min | Max | Q1 | Q3 | Tr. Mean |
|-------|------|--------|--------|--------------------|------|------|--------|--------|--------|----------|
| Loops | 1336 | 124.05 | 125.00 | 33.95 | 0.93 | 9.00 | 215.00 | 105.00 | 145.00 | 125.12 |
| MW | 1336 | 117.31 | 199.00 | 31.83 | 0.87 | 9.00 | 203.00 | 99.00 | 137.00 | 118.35 |

The data shows that, on average, the loop count was higher by 7 vehicles (per 15-minute interval) than the microwave count (124 vs. 117). Confidence intervals and a two-sample t-test were run on the loops and microwave counts. The comparison shows the difference between the mean count for loops (124 counts per 15 minute interval) and microwave (117 counts) is statistically significant, where $p=0.00$. The percent difference between the means is 5.7%.

Table 2.2 provides the confidence intervals for the loops and microwave counts.

Table 2.2: Two Sample T-Test and Confidence Intervals for Loops and Microwave Counts

| Variable | n | Mean (\bar{X}) | St. Dev (s) | Standard Error (se) | 95% CI |
|----------|------|--------------------|-----------------|-------------------------|------------------|
| Loops | 1336 | 124.055 | 33.951 | 0.929 | 122.232, 125.877 |
| MW | 1336 | 117.314 | 31.832 | 0.871 | 115.605, 119.022 |

$$95\% \text{ CI for } \mu_{\text{LOOPS}} - \mu_{\text{MW}}: (4.24, 9.24)$$

$$t\text{-Test: } \mu_{\text{LOOPS}} = \mu_{\text{MW}} \text{ (vs not =): } t = 5.29 \quad p = 0.0000 \quad df = 2658$$

Of the 1336 records, the microwave count was lower than the loop count about 85% of the time (1131 of 1336). It was higher than the loop count 12% of the time (154 of 1336), and equal 4% of the time (51 of 1336).

Possible reasons for this inconsistency may be found in the way the loops and microwave detect vehicles. Loops detect ferrous metal objects passing over the loop area. When metal is no longer detected (e.g. there is at least a 1.7 m gap between ferrous metal objects), the loop amplifier resets and waits for the next vehicle (see Figure 2.3). On the other hand, the microwave detects objects within a horizontal beam pattern and is dependent on the detector's response time, hold time setting and distance from traffic lanes. These factors are probable causes for count discrepancies. Section 2.3 discusses some other potential discrepancies between loops and microwave.

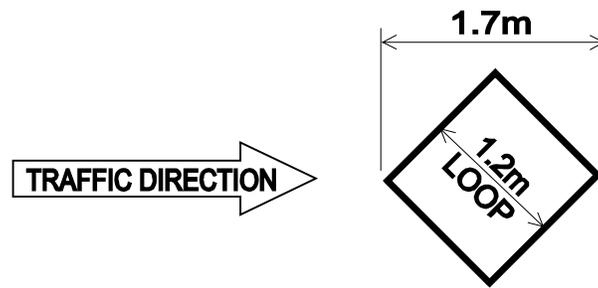


Figure 2.3: Inductive Loop Dimensions

From the data shown in Figure 2.1, it is apparent that the microwave typically counts lower than the loops. As noted earlier, however, the microwave counted higher 12% of the time. The graph indicates these higher counts occur more often on weekdays. The reason for the higher counts is unknown but may be explained by the increased traffic density and potential for more lane changes. During a lane change, a vehicle occupies a portion of two lanes and could potentially be counted as two different vehicles by the microwave. Another possibility may be that the loops undercount as vehicle spacing converges near the STOP line.

Figure 2.4 shows the same data but sorted by traffic count. Occurrences of the microwave counting higher than the loops appear random, meaning traffic density alone does not appear to cause the high counts. However, the figure does indicate the difference between the loops and microwave increases as the traffic density increases. This is expected if the loops and microwave are consistent in how each detects vehicles, that is, they are consistent in how they over or undercount. The higher the traffic density, the greater the difference between loop and microwave counts.

Figure 2.5 takes this comparison one step further by comparing the percent difference between the two types of counts. The figure suggests the difference between loop and microwave counts increase 2% for every 100 vehicles. This change in rate indicates the loop and/or microwave error rates increase as traffic density increases, although this is a weak argument, with an R-squared of only 0.0275.

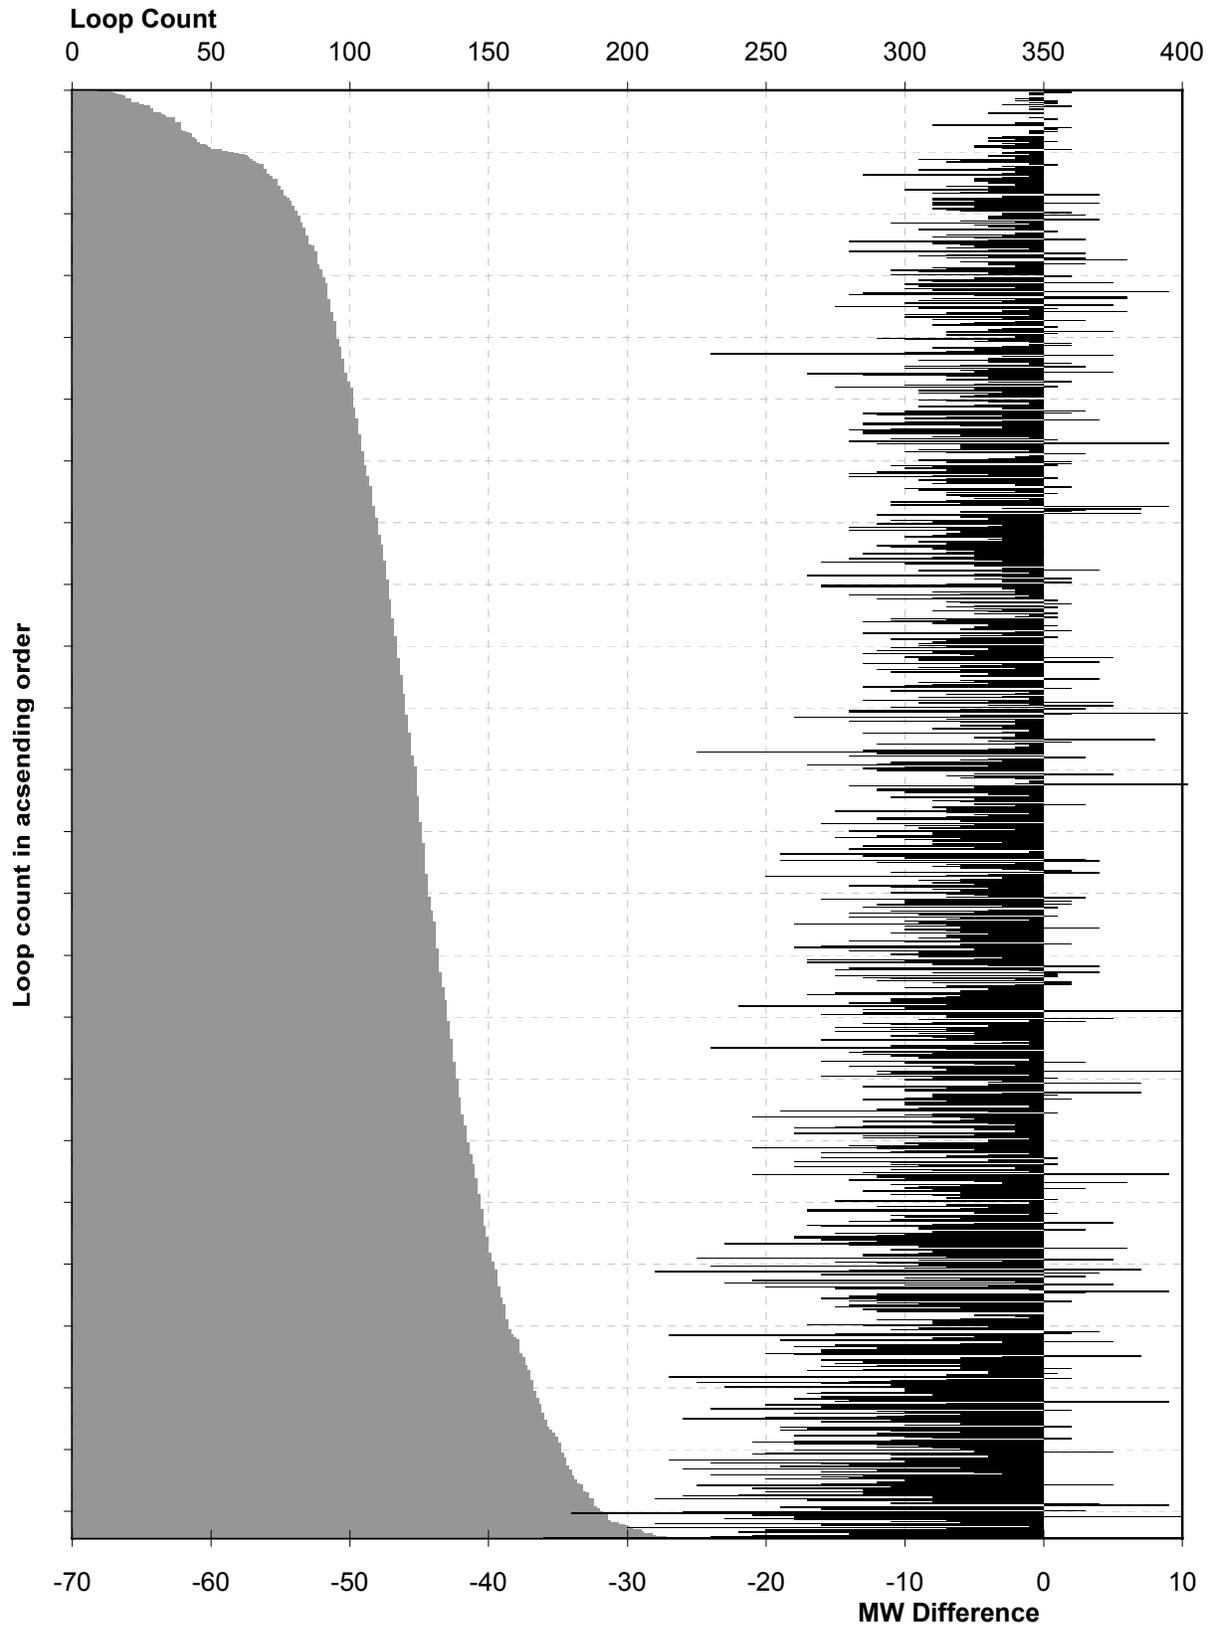


Figure 2.4: Eastbound Traffic Counts (NB Intersection) - Sorted by Loop Count

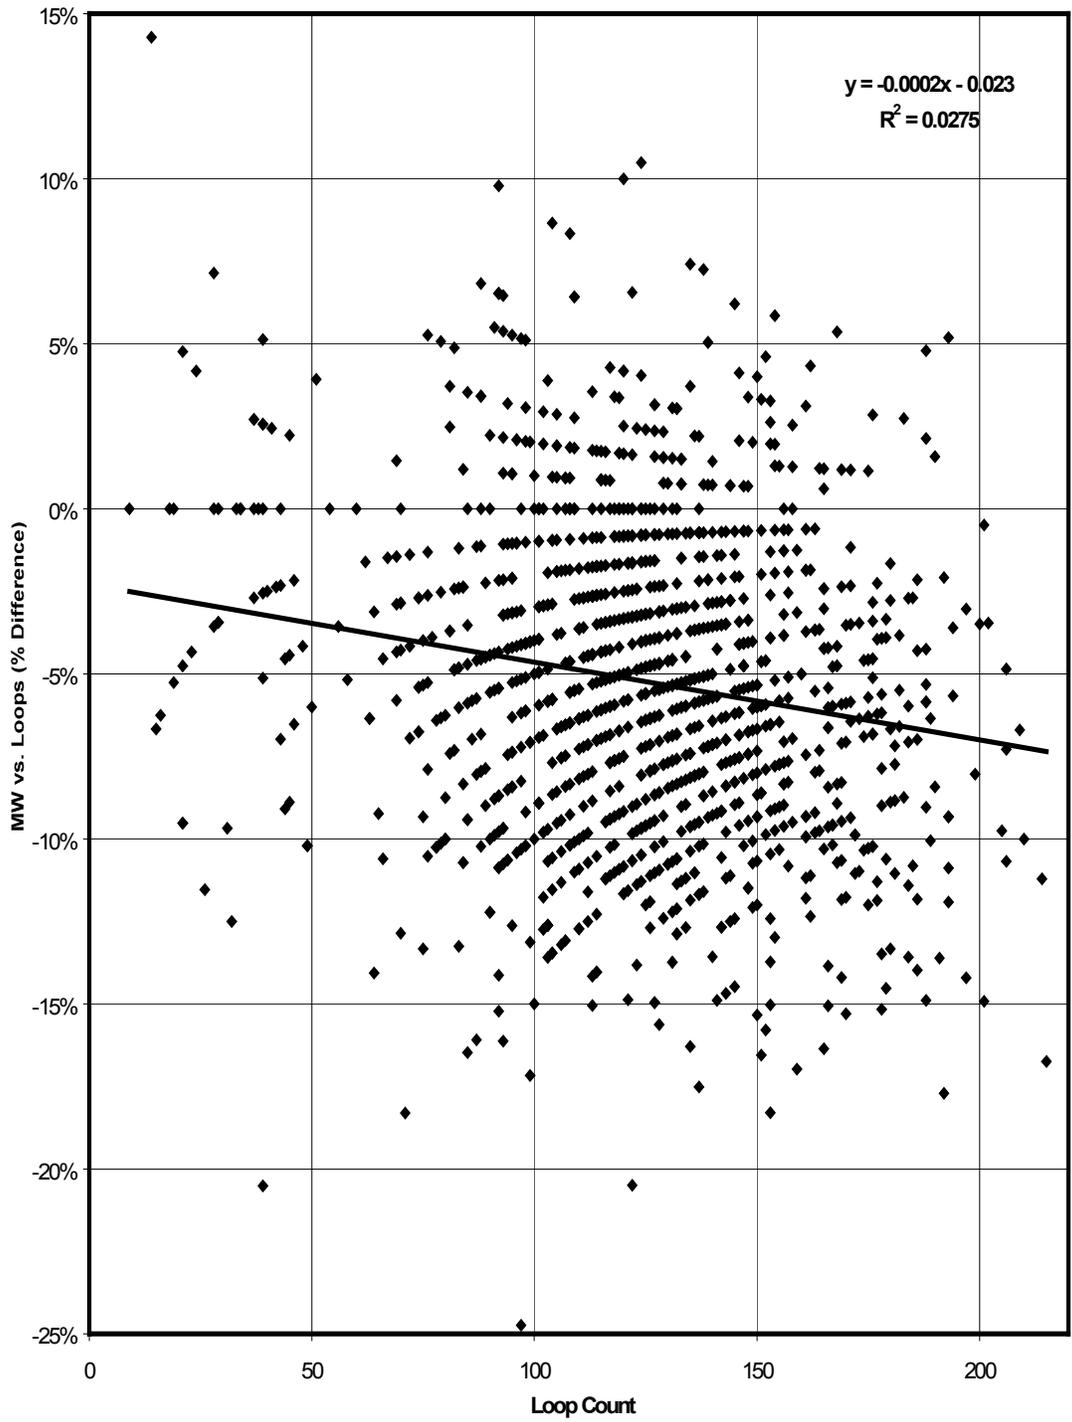


Figure 2.5: Eastbound Traffic Counts (NB Intersection) – Percent Difference

2.3 POTENTIAL ERROR COUNTS

Although not tested, some assumptions for potential over- and undercounting are shown in Table 2.3. Errors are not limited to those shown. Further, it is assumed that the devices are properly aimed and tuned.

Table 2.3: Potential Errors for Various Traffic Conditions

| Traffic Condition or Vehicle Type | Probability of occurrence † | Inductive Loops | Microwave Sensor* |
|--|-----------------------------|--|---|
| Trailer with short tongue, < 1.7m | <1% | Okay | Okay |
| Trailer with long tongue | 1% | Over-count potential | Okay |
| Multi-axle trucks | 10% | Over-count potential on high clearance truck bed | Okay |
| Small vehicle well hidden by larger vehicle in adjacent lane | 1% | Okay | Undercount potential |
| Motorcycle | <1% | Okay | Undercount potential (at normal or low sensitivity setting) |
| Tailgating or bumper-to-bumper traffic | <1% | Undercount if spacing is <1.7m | Undercount if spacing is <2.1m |
| Slow moving traffic | <1% | Okay | Over-count potential (due to null effect) |
| Vehicle occupying a portion of two lanes (e.g. changing lanes) | 5% | Undercount if vehicle passes between loops. | Over-count potential |
| Vehicle not in lane (e.g. vehicle using shoulder or median to make a right or left turn) | 1% | Undercount | Undercount potential (depends on zone setup) |

† Approximate probability traffic condition occurs at the Chemawa Road intersection only.

* Microwave detection is dependent on the detector's response time and hold time setting. *Response time* is the time for an input, generated by a vehicle in the field of regard, to be processed by the detector and registered as an output in the form of a presence, count, or other appropriate indication. A response time is also defined for the time required by the detector to drop an output when the vehicle leaves the field of regard. Response time of current models is <0.3 seconds. *Hold times* are designed to eliminate dropout of vehicle detection as may occur when towing vehicles with long tongue couplings. (Klein and Kelly 1996)

In general, the above table indicates that loops are more likely to produce higher counts than the microwave.

Another explanation of the differences in counts is the distance between the microwave and loop sensors. There is potential for vehicles to be located between the microwave and loop sensors as a new 15-minute time interval begins. The distance between the microwave and loop is 77 m. A close group of vehicles traveling 19 m apart could result in a difference of 8 vehicles, although this would be an infrequent occurrence.

2.4 FIELD COUNTS

Visual observations were made on June 7, 2001 to compare actual vehicle counts with the sensor detection counts. The visual count was lower than the loop and microwave counts by 3 to 5%. In a non-typical case, the microwave produced counts similar to the loops, rather than being 5.7% lower as found earlier in this report. This period of time was also during commute traffic in which traffic density was higher and lane changing was common.

Table 2.4: Comparison of Visual, Loop and Microwave Traffic Counts

| Source | Eastbound lanes | Westbound lanes |
|-----------|-----------------|-----------------|
| Visual | 328 | 692 |
| Loops | 340 (+4%) | <i>na</i> |
| Microwave | 343 (+5%) | 714 (+3%) |

The number in parenthesis is the percent difference from the visual count.
See the appendix for more detailed data.

2.5 IMPACT ON SIGNAL TIMING PHASE

Although the number of vehicles detected by the loops and microwave differ, it appears the microwave provides reasonable detection for the extension and call functions to properly operate. In most cases, miscounting the number of vehicles in an extension function should have little impact on the signal phase timing. This includes counting a vehicle with trailer as two vehicles or counting two vehicles as one.

A worst case situation would be failure to detect an approaching vehicle in “green” phase and not allowing it to proceed through the intersection, especially when no other vehicles are waiting in the opposing lanes. This situation could result in the vehicle running a red light, either intentionally or unintentionally. Although an alert and prudent driver should have sufficient time to stop safely.

A possible case of a failed detection as discussed above is a situation where a large vehicle traveling in the east bound lane (closer to microwave) blocks from view a small vehicle traveling west. If the small vehicle is the only west bound vehicle, the traffic controller may not extend the “green” phase for the vehicle.

3.0 CONCLUSIONS AND RECOMMENDATIONS

3.1 CONCLUSIONS

There is a statistically significant difference in how the loops and microwave detectors count vehicles. The data showed that the microwave undercounted the loops by an average of 5.7%. The reason for the difference is unknown, but the conditions shown in Table 2. could be probable causes.

Although there is a difference in counts, it is not believed to be significant enough to affect the proper operation of the signal controller. As such, the microwave appears to be suitable for this type of installation – serving an extension function for the signal controller.

A benefit of the microwave is the non-intrusive method of detection. This is desirable for use on reinforced-concrete structures, eliminating the need to cut grooves near the reinforcing steel. With the microwave located away from the travel lanes, it can be installed and maintained with little impact on the motorist. The location is also safer for the highway workers.

It should be noted that this study did not look at the long-term performance or cost benefits of the microwave detector. The cost-benefit would vary by site if one considers the value on traffic disruption to install or repair, or the value of reduced stress on a pavement or structure.

4.0 REFERENCES

Klein, L. and M. Kelley. 1996. *Detection Technology For IVHS, Volume I: Final Report*. Publication No. FHWA-RD-95-100, U.S. Department of Transportation, Washington D.C.

Klein, L. and M. Kelley. 1996. *Detection Technology For IVHS, Volume II: Final Report Addendum*. Publication No. FHWA-RD-96-109, U.S. Department of Transportation, Washington D.C.

EIS. 2000. Electronic Integrated Systems Inc. *RTMS User Guide*.

APPENDIX A
TRAFFIC COUNT DATA

TRAFFIC COUNT DATA

Table A.1 lists the dates and times of the vehicle count data used in this study. Table A.2 compares traffic counts for visual, loop and microwave systems for June 7, 2001.

Table A.1: Traffic Data Download List

| Travel Lanes | Date | Time | Time interval | Number of records |
|------------------------|--------------------|-------------------|----------------------|--------------------------|
| Eastbound (NB Int.) | 4/19/01 (Thurs) | 1:30pm to 8:00pm | 15 minutes | 27 |
| | 4/20/01 to 4/23/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 4/24/01 (Tues) | 6:00am to 5:45pm | 15 minutes | 47 |
| | 5/3/01 (Thurs) | 3:15pm to 8:00pm | 15 minutes | 19 |
| | 5/4/01 to 5/7/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 5/8/01 (Tues) | 6:00am to 1:15pm | 15 minutes | 29 |
| | 5/15/01 (Tues) | 12:30pm to 8:00pm | 15 minutes | 30 |
| | 5/16/01 to 5/21/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 5/22/01 (Tues) | 6:00am to 10:15pm | 15 minutes | 17 |
| | 5/31/01 (Thurs) | Noon to 8:00pm | 15 minutes | 32 |
| | 6/1/01 to 6/6/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 6/7/01 (Thurs) | 6:00am to 9:45pm | 15 minutes | 15 |
| Westbound (SB Int.) | 4/19/01 (Thurs) | 1:30pm to 8:00pm | 15 minutes | 26 |
| | 4/20/01 to 4/23/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 4/24/01 (Tues) | 6:00am to 2:15pm | 15 minutes | 33 |
| | 5/3/01 (Thurs) | 3:15pm to 8:00pm | 15 minutes | 19 |
| | 5/4/01 to 5/7/01 | 6:00am to 8:00pm | 15 minutes | 56/day |
| | 5/8/01 (Tues) | 6:00am to 9:45am | 15 minutes | 15 |

Table A.2: Comparison of Visual, Loop and Microwave Traffic Counts for June 7, 2001

| Eastbound travel lanes (NB intersection) – at Loops | | | | | | |
|--|---------------|--|---------------------|---------------------|---------------------|---------------------|
| Travel Lane | Count Method | Vehicle counts per 15 min. Time interval | | | | Total |
| | | 8:30-8:45 | 8:45- 9:00 | 9:00-9:15 | 9:15- 9:30 | |
| Right | Visual | <i>na</i> | 32 | 21 | 22 | 75 |
| Left | | <i>na</i> | 56 | 51 | 48 | 155 |
| Left turn | | <i>na</i> | 36 | 35 | 27 | 98 |
| Total | | <i>na</i> | 124 | 107 | 97 | 328 |
| Right | Loop 3 | 34 | 33 | 24 | 27 | 84 |
| Left | Loop 4 | 56 | 57 | 51 | 48 | 156 |
| Left turn | Loop 5 | 31 | 37 | 34 | 29 | 100 |
| Total * | Loops 3, 4, 5 | 121 | 127 (+2%) | 109 (+2%) | 104 (+7%) | 340 (+4%) |
| Right | MW 1 | 37 | 45 | 31 | 29 | 105 |
| Left | MW 2 | 81 | 86 | 78 | 74 | 238 |
| Total * | MW 1 & 2 | 118 | 131 (+6%) | 109 (+2%) | 103 (+6%) | 343 (+5%) |

| Westbound travel lanes (SB intersection) – at MW | | | | | | |
|---|------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Right | Visual | 56 | 69 | 74 | 62 | 261 |
| Left | | 118 | 120 | 103 | 90 | 431 |
| Total | | 174 | 189 | 177 | 152 | 692 |
| Right | MW 12 | 62 | 75 | 78 | 63 | 278 |
| Left | MW 11 | 115 | 126 | 103 | 92 | 436 |
| Total * | MW 11 & 12 | 177 (+2%) | 201 (+6%) | 181 (+2%) | 155 (+2%) | 714 (+3%) |

* number in parenthesis is percent difference from visual count

Note: the interval for the visual count might have been slightly different than the controllers' system clock due to human error synchronizing watches.

APPENDIX B

DESCRIPTIVE STATISTICS

DESCRIPTIVE STATISTICS

The descriptive statistics and quarter intervals for the eastbound (EB) lanes are shown below.

Table B.1: Descriptive Statistics for EB Traffic (NB Intersection)

| | n | Mean | Median | Standard Deviation | s.e. | Min | Max | Q1 | Q3 | Tr. Mean |
|-------|------|--------|--------|--------------------|------|------|--------|--------|--------|----------|
| Loops | 1336 | 124.05 | 125.00 | 33.95 | 0.93 | 9.00 | 215.00 | 105.00 | 145.00 | 125.12 |
| MW | 1336 | 117.31 | 199.00 | 31.83 | 0.87 | 9.00 | 203.00 | 99.00 | 137.00 | 118.35 |

n = Sample size.

Mean (\bar{x}) which is the sample mean.

Median = The middle value in the distribution

Standard Deviation (s) = A measure of the standard distance from the sample mean. It is a measure of dispersion around the sample mean. Large standard deviations indicate the distribution is widely dispersed.

s.e. = Standard error of the mean. The standard error is the standard deviation of the distribution of possible sample means. The standard error measures the standard amount of difference one should expect between the sample mean (\bar{x}), and the population mean (μ). It is calculated using the formula:

$$s.e. = s/\sqrt{n} \qquad \qquad \qquad \text{Eq. B.1}$$

Standard error provides a measure of how well a sample mean approximates the population mean (*Gravetter and Wallnau 1999*). If the standard error is small, this is an indication the sample mean more closely approximates the population mean.

Min = The minimum value in the distribution.

Max = The maximum value in the distribution.

Q1 = The value below which one quarter of the distribution of values lie.

Q3 = The value below which three quarters of the distribution of values lie.

TR. Mean = The mean when only considering the range of values between Q1 and Q3.

The data shows that, on average, the loop count was higher by 7 vehicles (per 15-minute interval) than the microwave count (124 vs. 117). Confidence intervals and a two-sample t-test were run on the loops and microwave counts.

A two sample t-test uses the data from two separate samples (loop count and microwave count) to test a hypothesis about the difference between two population means. In statistical analysis, the null hypothesis is always tested. In a two sample t-test, the null hypothesis (H_0) is that:

$$\mu_{MW} - \mu_{LOOPS} = 0. \qquad \qquad \qquad \text{Eq. B.2}$$

Another way of stating the null hypothesis is that the two population means are equal.

Since the population means are unknown, the *t-test* uses the sample means and standard errors to test the null hypothesis. The formula is:

$$t = \frac{(\bar{X}_{MW} - \bar{X}_{LOOPS}) - (\mu_{MW} - \mu_{LOOPS})}{\sqrt{se_{MW} + se_{LOOPS}}} \quad \text{Eq. B.3}$$

In using equation 2.3, it is assumed that the null hypothesis is true and thus, the difference in the two population means is 0. The other terms in the equation are:

- \bar{X}_{MW} = Sample mean for the microwave counts.
- \bar{X}_{LOOPS} = Sample mean for the loop counts.
- se_{MW} = Sample standard error for microwave counts
- se_{LOOPS} = Sample standard error for loop counts

The *t* statistic calculated using Equation 2.3 is 5.29.

To test for statistical significance, the critical *t* value is determined from statistical tables using an assumed significance level (α) and degrees of freedom. Degrees of freedom are calculated by adding the sample size for the microwave counts (minus one), and the sample size for loops (minus one). The degrees of freedom are:

$$(1336 - 1) + (1336 - 1) = 2,670$$

The assumed significance level (α) represents the probability of error that is accepted in making an inference about rejecting a true null hypothesis. A value of 0.05 is typically used in scientific research.

The critical *t* value is 1.96 at a 0.05 level of significance. Since the calculated value of *t* is greater than the critical *t* value, it can be inferred (with a 0.05 probability of error) that the two sample means are not from the same population. Therefore, the null hypothesis is rejected, and there are statistical differences between the mean count for loops (124 counts) and microwave (117 counts). The percent difference between the means is 5.7%.

In Table 2.2, the 95% confidence intervals (CI) are placed around the sample means. The 95% confidence interval is the interval in which there is a 95% probability that the true population mean μ , lies inside it. In other words:

$$\mu = \bar{X} \pm \text{some error.}$$

The confidence interval is calculated by placing error limits around the sample mean, \bar{X} . Generally, it is assumed that the sample mean is located somewhere in the center of the distribution of all possible sample means, which is a normal distribution. The limits for a 95% confidence interval are within 95% of the normal distribution curve of all possible sample means. The 95% confidence interval is calculated by placing limits around the sample mean. The confidence limits are determined using the following formula:

$$\bar{X} \pm k \frac{(s)}{\sqrt{n}} \quad \text{Eq. B.4}$$

where:

\bar{X} = sample mean.

k = k is a value determined from normal distribution tables.

For 95% confidence limits, $k = 1.96$.

s = standard deviation for sample

n = sample size

Using the sample mean for the loops as an example, the confidence limits around the mean are:

$$124.055 \pm 1.96 \frac{(33.951)}{\sqrt{1,336}} = 122.232, 125.877$$

Table 2.2 below provides the confidence intervals for the loops and microwave counts.

Table B.2: 95% Confidence Intervals for Loops and Microwave Counts

| Variable | n | Mean (\bar{X}) | St. Dev (s) | Standard Error (se) | 95% CI |
|----------|------|--------------------|-----------------|-------------------------|------------------|
| LOOPS | 1336 | 124.055 | 33.951 | 0.929 | 122.232, 125.877 |
| MW | 1336 | 117.314 | 31.832 | 0.871 | 115.605, 119.022 |

The confidence limits for the loops do not overlap with the microwave confidence limits. Therefore, with a 95% degree of confidence, one can say that the population means for the microwave and the loops are different.

$$\text{The difference in means} = \bar{X}_{\text{LOOPS}} - \bar{X}_{\text{MW}}: 124.055 - 117.314 = 6.741$$

$$\begin{aligned} & \text{95\% Confidence Interval for Difference in Means:} \\ & = 6.741 \pm (4.24, 9.24) \end{aligned}$$

$$t\text{-Test } \mu_{\text{LOOPS}} = \mu_{\text{MW}} \text{ (vs not =): } t = 5.29 \quad p = 0.0000 \quad df = 2658$$

Of the 1336 records, the microwave count was lower than the loop count about 85% of the time (1131 of 1336), higher 12% (154 of 1336) and equal 4% (51 of 1336).