



U.S. Department of Transportation  
Federal Highway Administration

International Technology Exchange Program



# Asphalt Pavement Warranties Technology and Practice in Europe

NOVEMBER 2002

## **N O T I C E**

The contents of this report reflect the views of the authors, who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official policy of the Department of Transportation.

The metric units reported are those used in common practice by the persons interviewed. They have not been converted to pure SI units because in some cases, the level of precision implied would have been changed.

The United States Government does not endorse products or manufacturers. Trademarks or manufacturers' names appear herein only because they are considered essential to the document.

The publication of this document was sponsored by the U.S. Federal Highway Administration under contract number DTFH61-99-C00005, awarded to American Trade Initiatives, Inc. Any opinions, options, findings, conclusions, or recommendations expressed herein are those of the authors and do not necessarily reflect those of the U.S. Government, the authors' parent institutions, or American Trade Initiatives, Inc.

This report does not constitute a standard, specification, or regulation.

1. Report No. FHWA-PL-04-002		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Asphalt Pavement Warranties—Technology and Practice in Europe				5. Report Date November 2003	
				6. Performing Organization Code	
7. Author(s) John D'Angelo, Gary Whited, Keith Molenaar, Steven Bower, Jeffrey Russell, Gerald Huber, Richard Smutzer, David Jones, James Steele, Reaburn King, Monte Symons, Timothy Ramirez, James Wood, Jon Rice				8. Performing Organization Report No.	
9. Performing Organization Name and Address American Trade Initiatives P.O. Box 8228 Alexandria, VA 22306-8228				10. Work Unit No. (TRAIS)	
				11. Contract or Grant No. DTFH61-99-C-0005	
12. Sponsoring Agency Name and Address Office of International Programs Office of Policy Federal Highway Administration U.S. Department of Transportation American Association of State Highway and Transportation Officials				13. Type of Report and Period Covered	
				14. Sponsoring Agency Code	
15. Supplementary Notes FHWA COTR: Hana Maier, Office of International Programs					
16. Abstract A diverse team of experts, representing the Federal, State, and local government as well as industry and academia, was assembled to research, document, and promote best practices in Europe relating to short- and long-term warranty contracting for asphalt paving projects. Specifically, the team studied methodologies to determine risk assessment for agencies and contractors; administration of warranty contracts; criteria to account for traditional performance indicators; and practices to maintain smoothness and skid resistance.  The team traveled to Denmark, Germany, Spain, Sweden, and the United Kingdom, all of which have long histories with the use of warranty contracting and are facing many of the same political, financial, and resource challenges as the United States.  The report covers key findings and recommendations relating to material and workmanship warranties, performance warranties, best-value procurement, and alternative contracting. The report concludes with recommendations for Federal, State, and local governments as well as the pavement industry.					
17. Key Words contracting, warranty, performance, pavement performance contract, best-value procurement			18. Distribution Statement No restrictions. This document is available to the public from the: Office of International Programs, FHWA-HPIP, Room 3325, U.S. Department of Transportation, Washington, DC 20590 <i>international@fhwa.dot.gov</i> <i>www.international.fhwa.dot.gov</i>		
19. Security Classify. (of this report) Unclassified	20. Security Classify. (of this page) Unclassified	21. No. of Pages 72	22. Price Free		

SUMMARY REPORT OF THE

# Asphalt Pavement Warranties Technology and Practice in Europe

PREPARED BY THE MEMBERS OF THE STUDY TOUR TEAM

**John D'Angelo (Co-Chair)**

Federal Highway  
Administration

**Gary C. Whited (Co-Chair)**

Wisconsin DOT

**Keith R. Molenaar**

University of Colorado at  
Boulder

**Steven C. Bower**

Michigan DOT

**Jeffrey S. Russell**

University of Wisconsin at  
Madison

**Gerald A. Huber**

Heritage Research Group

**Richard K. Smutzer**

Indiana DOT

**David R. Jones**

Trumbull Asphalt/Owens  
Corning

**James J. Steele**

Federal Highway  
Administration

**Reaburn E. King**

Michigan Asphalt Pavement  
Association

**Monte G. Symons**

Federal Highway  
Administration

**Timothy L. Ramirez**

Pennsylvania DOT

**James W. Wood**

City of Dallas

**Jon F. Rice**

Kent County Road  
Commission

and **American Trade Initiatives, Inc.**

Prepared for the **Federal Highway Administration, U.S. Department of  
Transportation, Washington, DC 20590** and **The American Association of  
State Highway and Transportation Officials**

**November 2003**



# FHWA International Technology Exchange Program

The Federal Highway Administration's (FHWA) Technology Exchange Program accesses and evaluates innovative foreign technologies and practices that could significantly benefit U.S. highway transportation systems. This approach allows for advanced technology to be adapted and put into practice much more efficiently without spending scarce research funds to recreate advances already developed by other countries.

The main channel for accessing foreign innovations is the International Technology Scanning Program. The program is undertaken jointly with the American Association of State Highway and Transportation Officials (AASHTO) and its Special Committee on International Activity Coordination in cooperation with the Transportation Research Board's National Cooperative Highway Research Program Project 20-36 "Highway Research and Technology—International Information Sharing," the private sector, and academia.

FHWA and AASHTO jointly determine priority topics for teams of U.S. experts to study. Teams in the specific areas being investigated are formed and sent to countries where significant advances and innovations have been made in technology, management practices, organizational structure, program delivery, and financing. Scan teams usually include representatives from FHWA, State Departments of Transportation, local governments, transportation trade and research groups, the private sector, and academia.

After a scan is completed, team members evaluate findings and develop comprehensive reports,

including recommendations for further research and pilot projects to verify the value of adapting innovations for U.S. use. Scan reports, as well as the results of pilot programs and research, are circulated throughout the country to State and local transportation officials and the private sector. Since 1990, FHWA has organized more than 50 international scans and disseminated findings nationwide on topics such as pavements, bridge construction and maintenance, contracting, intermodal transport, organizational management, winter road maintenance, safety, intelligent transportation systems, planning, and policy.

The International Technology Scanning Program has resulted in significant improvements and savings in road program technologies and practices throughout the United States. In some cases, scan studies have facilitated joint research and technology sharing projects with international counterparts, further conserving resources and advancing the state of the art. Scan studies have also exposed transportation professionals to remarkable advancements and inspired implementation of hundreds of innovations. The result: large savings of research dollars and time, as well as significant improvement in the nation's transportation system.

For a complete list of International Technology Scanning topics and to order free copies of the reports please see the list contained in this publication, as well as: Website: [www.international.fhwa.dot.gov](http://www.international.fhwa.dot.gov) or Email: [international@fhwa.dot.gov](mailto:international@fhwa.dot.gov).

# FHWA International Technology Exchange Reports

International Technology Scanning Program: Bringing Global Innovations to U.S. Highways

## **SAFETY**

Managing and Organizing Comprehensive Highway Safety in Europe (2003)

European Road Lighting Technologies (2001)

Commercial Vehicle Safety Technology and Practice in Europe (2000)

Innovative Traffic Control Technology and Practice in Europe (1999)

Road Safety Audits—Final Report and Case Studies (1997)

Speed Management and Enforcement Technology: Europe and Australia (1996)

Safety Management Practices in Japan, Australia, and New Zealand (1995)

Pedestrian and Bicycle Safety in England, Germany and the Netherlands (1994)

## **PLANNING AND ENVIRONMENT**

European Right-of-Way and Utilities Best Practices (2002)

Wildlife Habitat Connectivity Across European Highways (2002)

Sustainable Transportation Practices in Europe (2001)

National Travel Surveys (1994)

European Intermodal Programs: Planning, Policy, and Technology (1994)

## **POLICY AND INFORMATION**

European Practices in Transportation Workforce Development (2003)

Merging Models for Delivering Transportation Programs and Services (1999)

Acquiring Highway Transportation Information from Abroad (1994)

International Guide to Highway Transportation Information (1994)

## **OPERATIONS**

Freight Transportation: The Latin American Market (2003)

Intelligent Transportation Systems and Winter Operations in Japan (2003)

Traveler Information Systems in Europe (2003)

Meeting 21st Century Challenges of System Performance Through Better Operations (2003)

Freight Transportation: The European Market (2002)

Methods and Procedures to Reduce Motorist Delays in European Work Zones (2000)

European Winter Service Technology (1998)

European Traffic Monitoring (1997)

Traffic Management and Traveler Information Systems (1997)

Snowbreak Forest Book – Highway Snowstorm Countermeasure Manual (Translated from Japanese) (1996)

Winter Maintenance Technology and Practices—Learning from Abroad (1995)

Advanced Transportation Technology (1994)

## **INFRASTRUCTURE—GENERAL**

Contract Administration: Technology and Practice in Europe (2002)

Geometric Design Practices for European Roads (2001)

International Contract Administration Techniques for Quality Enhancement (1994)

## **INFRASTRUCTURE—GENERAL**

Pavement Preservation Technology in France, South Africa, and Australia (2002)

Recycled Materials In European Highway Environments (2000)

South African Pavement and Other Highway Technologies and Practices (1997)

Highway/Commercial Vehicle Interaction (1996)

European Concrete Highways (1992)

European Asphalt Technology (1990)

## **INFRASTRUCTURE**

Performance of Concrete Segmental and Cable-Stayed Bridges in Europe (2001)

Steel Bridge Fabrication Technologies in Europe & Japan (2001)

European Practices for Bridge Scour and Stream Instability Countermeasures (1999)

Geotechnical Engineering Practices in Canada and Europe (1999)

Advanced Composites in Bridges in Europe and Japan (1997)

Asian Bridge Structures (1997)

Bridge Maintenance Coatings (1997)

Northumberland Strait Crossing Project (1996)

European Bridge Structures (1995)

Geotechnology—Soil Nailing (1992)

All publications are available on the Internet at [www.international.fhwa.dot.gov](http://www.international.fhwa.dot.gov)



# Table of Contents




p. 7




p. 8

<b>Executive Summary</b> .....	<b>1</b>
Background .....	1
Purpose and Scope .....	1
Summary Observations .....	2
Key Findings .....	2
Material and Workmanship Warranties .....	3
Performance Warranties .....	3
Best-Value Procurement .....	4
Alternative Contracting .....	4
Conclusions and Recommendations .....	4
<b>Chapter 1: Overview</b> .....	<b>6</b>
Background .....	6
Purpose and Scope .....	6
Methodology .....	6
Organization of the Report .....	9
<b>Chapter 2: Use of Warranties in Europe</b> .....	<b>11</b>
Warranty Definitions .....	11
Context of Transportation in the Host Countries .....	12
Conclusions .....	16
<b>Chapter 3: Warranty Implementation</b> .....	<b>17</b>
Products Warranted .....	17
Length of Warranties .....	17
Definition of Existing Conditions .....	20
Procurement .....	20
Bonding Requirements .....	23
Design and Construction Contract Award .....	26
Payment .....	28


inal Acceptance .....	<b>.28</b>
onclusions .....	<b>.29</b>
<b>hapter 4: Warranty Evaluation .....</b>	<b>.30</b>
esponsibilities for Operation and Maintenance .....	<b>.30</b>
erformance Indicators and Thresholds .....	<b>.31</b>
erformance Measurements .....	<b>.32</b>
orrective Action .....	<b>.34</b>
rogram Performance Evaluation and Industry Input .....	<b>.35</b>
nnovation in Products and Processes .....	<b>.36</b>
onclusions .....	<b>.37</b>
<b>hapter 5: Alternative Delivery Methods .....</b>	<b>.38</b>
ntroduction .....	<b>.38</b>
aintenance Contracts .....	<b>.40</b>
avement Performance Contracts .....	<b>.40</b>
esign-Build-Finance-Operate Contracts .....	<b>.47</b>
onclusions .....	<b>.50</b>
<b>hapter 6: Observations, Recommendations, and Implementation .....</b>	<b>.51</b>
ummary Observations .....	<b>.51</b>
ecommendations .....	<b>.52</b>
nplementation .....	<b>.52</b>
onclusions .....	<b>.53</b>
<b>ppendix A: Scan Team Members .....</b>	<b>.54</b>
ontact Information .....	<b>.54</b>
eam Biographies .....	<b>.55</b>
<b>ppendix B: Amplifying Questions .....</b>	<b>.56</b>
<b>ppendix C: References .....</b>	<b>.60</b>
<b>ppendix D: European Host Representatives .....</b>	<b>.61</b>
enmark .....	<b>.61</b>
iermany .....	<b>.61</b>
pain .....	<b>.62</b>
nited Kingdom .....	<b>.62</b>
weden .....	<b>.63</b>



**p. 21**



**p. 44**

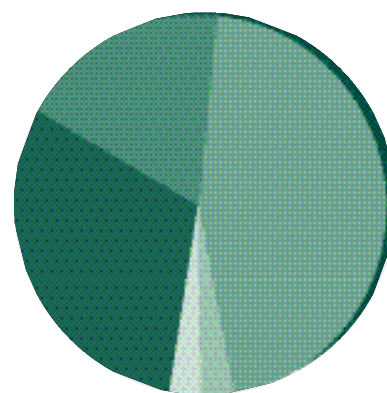

**p. 41**





# Abbreviations and Acronyms

<b>AASHTO</b>	American Association of State and Highway Transportation Officials
<b>CQC</b>	Contractor quality control
<b>DBFO</b>	Design-build-finance-operate
<b>DOT</b>	Department of Transportation
<b>EU</b>	European Union
<b>FHWA</b>	Federal Highway Administration
<b>FWD</b>	Falling weight deflectometer
<b>HMA</b>	Hot mix asphalt
<b>IR</b>	International Roughness Index
<b>ISO</b>	International Organization of Standardization
<b>MAC</b>	Managing agent contract
<b>NCHRP</b>	National Cooperative Highway Research Program
<b>PMS</b>	Pavement management system
<b>PPC</b>	Pavement performance contracts
<b>PPP</b>	Public-private partnerships
<b>QA/QC</b>	Quality assurance/quality control
<b>SCRIM</b>	Sideways force coefficient routine investigation machine
<b>STIP</b>	Scan technology implementation plan
<b>TRB</b>	Transportation Research Board

# Executive Summary

U.S. highway agencies are discussing and, to some extent, implementing warranty contracts on asphalt paving projects. These highway agencies believe they will receive improved performance from warranty contracts through a reduction in life cycle costs and introduction of contractor ingenuity during the design and construction process. In addition, these agencies see warranty contracting as a methodology for dealing with reduced staffing levels and a loss of expertise in the agencies. Concerns over definitions, roles, responsibilities, and appropriate allocation of risk are of major concern among all stakeholders. The European highway community has a long history with the use of short-term and long-term warranty contracting. This change toward the use of warranties in the United States, combined with the knowledge of warranties in Europe, led to the formation of the European Asphalt Pavement Warranties Scan. The goal of the scan was to learn from European experience to help develop a successful warranty program in the United States.

## Background

A warranty is a type of performance-based contract that guarantees the integrity of a product and the constructor's responsibility for the repair or replacement of defects. Traditional U.S. construction contracts typically require the contractor to provide project warranty for only 1 year after construction is complete; however, the design life cycle for all types of asphalt pavement is much longer than 1 year. U.S. highway agencies are increasingly requesting longer-term warranty contracts on asphalt paving projects. These highway agencies believe they will receive improved performance from warranty contracts and believe that warranty contracting may reduce life cycle costs by increasing contractor ingenuity during the construction process. Asphalt pavement warranties have the potential to help U.S. highway associations cope with staffing shortages and the loss of

experienced staff by potentially reducing project administration and overall construction costs.

Several studies of European asphalt pavement techniques in the early 1990s identified the use of warranties (FHWA 1990; FHWA 1994). Some European highway agencies have been using asphalt pavement warranties for more than 40 years. In recognition of the similarities and benefits that could result from an examination of European warranty practices, a diverse team of experts was assembled to research, document, and promote the implementation of best practices found in Europe that might benefit U.S. practitioners. The Federal Highway Administration (FHWA) and the American Association of State Highway and Transportation Officials (AASHTO) jointly sponsored this study, under the guidance of the FHWA Office of International Programs and the National Cooperative Highway Research Program (NCHRP).

## Purpose and Scope

In September 2002, a U.S. panel traveled to Europe to review and document the policies and strategies used in Europe to determine risk assessment and administer warranty contracts. The scan team also reviewed the criteria, programs, and analytical tools used to establish pavement distress criteria for warranting asphalt pavement performance. Specifically, the panel went to Europe to study the following:

- Methodologies used to determine risk assessment for the government agency and contractor.
- Methodologies for administration of warranty contracts.
- Methodologies to select criteria to account for traditional performance indicators of rutting, fatigue cracking, and low temperature cracking.

- Practices to maintain prescribed levels of smoothness and skid resistance.
- Criteria used in successful asphalt pavement warranties.
- Pavement performance prediction tools.

The panel evaluated policies and practices for potential application in the United States. It conducted meetings with representatives of government agencies, academia, and private sector organizations involved with warranties and visited sites where innovative asphalt warranty contracting techniques were being applied. The U.S. participants also shared their viewpoints and experiences in the spirit of mutually beneficial exchanges. The panel visited or met with representatives from Denmark, Germany, Spain, Sweden, and the United Kingdom.

### Summary Observations

The following summary observations are provided to set a context for the key findings, conclusions, and recommendations of this study. As noted in the summary observations, the European and U.S. transportation communities are quite similar in terms of the political, financial, and resource challenges that they face. However, the European transportation agencies are better leveraging the innovative management techniques, technical innovations, and financing capabilities that the private sector has to offer. There is a more spirited effort of partnership and collaboration between the public and private sectors in Europe than in the United States. The summary observations listed below are expanded upon throughout this report.

#### *Similar Transportation Needs*

- European transportation systems have growing capital project needs as well as a backlog of maintenance requirements.

#### *Long History of Material and Workmanship Warranties*

- Material and workmanship warranties of varying length have been used in the European host countries for 30 to 40 years.

#### *Purchasing Performance in Addition to Materials*

- Those countries with a long history of material and workmanship warranties are moving toward pavement performance warranties and other

methods of tying the contractor into performance of the pavement over the full life cycle of the product.

#### *Best-Value Procurement*

- A focus on quality exhibited by the use of best-value procurement.

#### *Public-Private Partnering*

- Strong partnerships between highway agencies and all sectors of the industry.

#### *Motivation for Alternative Contract Methods*

- Motivation for warranties, performance-based contracts, and design-build-finance-operate (DBFO) concessions include:
  - Need for innovation.
  - Need for private sector to finance system upgrades.
  - Desire to improve quality.
  - Desire to improve efficiency.
  - Resource issues.

#### *Balanced Contracting Approach*

- Transportation agencies are using a balanced approach in implementing traditional contracting, warranties, performance-based contracts, and DBFO concessions.

#### *Financing*

- Available tax dollars is an issue, which is compounded by the new European Union (EU) requirement for less than 3 percent capital debt.

#### *Outsourcing of Maintenance*

- Term maintenance contractors from the private sector are used exclusively in some of the host countries, while other countries are also increasing their use of such contractors.

### Key Findings

The European host countries have a long history of warranties on pavement construction. These countries have employed material and workmanship warranties for decades. Although their warranty programs have developed independently through either government specification or industry promotion, all of the countries believe that warranties have improved the quality of their highway systems. Figure E1 provides an overview of the warranty types observed on the scan, the countries that employ them, and their respective durations.

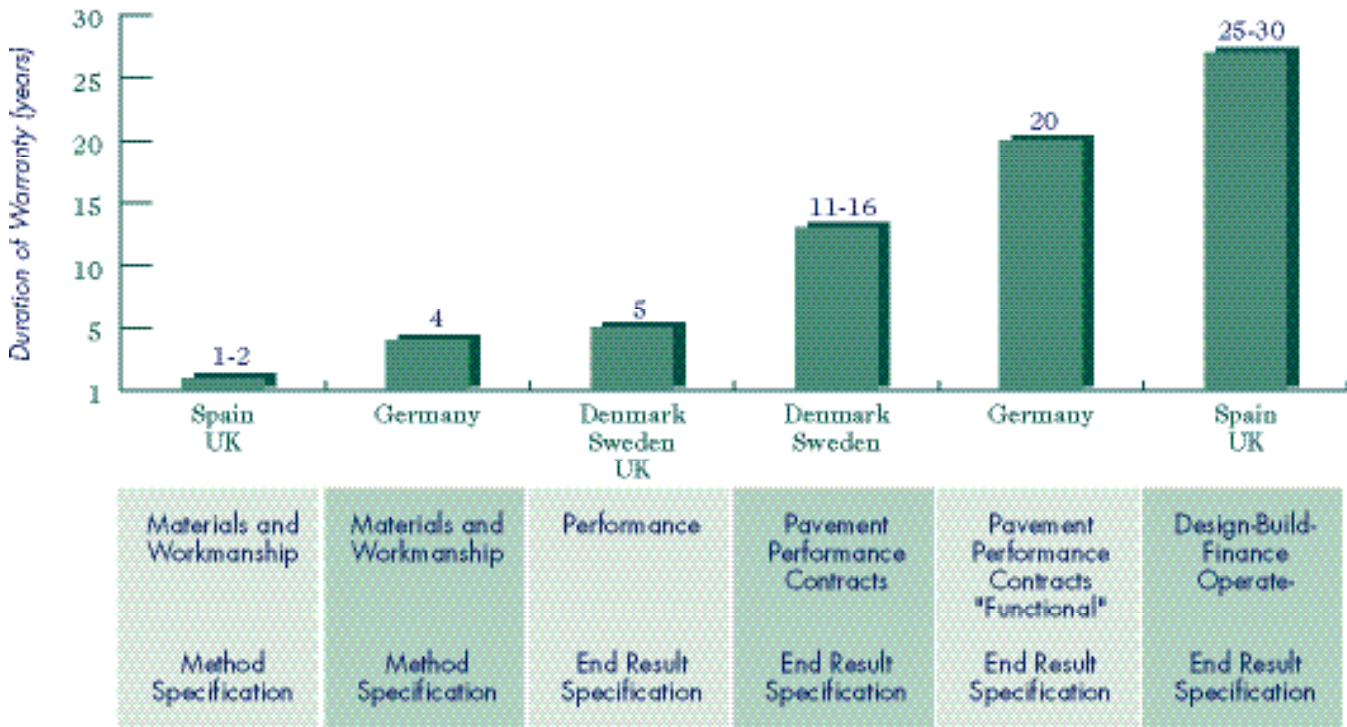


Figure E1 Observations on European warranties.

### Material and Workmanship Warranties

At a minimum, all of the host countries use material and workmanship warranties on their traditional contracts. These warranties ensure that the contractor will build the pavement as specified by the owner and fix any defects resulting from the use of improper materials or inferior installation. Depending on the country, the highway agencies may seek a remedy of defects from either the prime contractor or the asphalt contractor, if the prime is not the asphalt contractor.

Warranty periods vary. On projects designed by the highway agency, the United Kingdom uses a 1-year warranty period, Spain employs a 1-year warranty period, and Germany historically uses a 4-year period. These countries use performance indicators of rutting, cracking, and durability on material and workmanship warranties.

### Performance Warranties

Denmark and Sweden use performance warranties in their traditional contracts. The United Kingdom employs performance warranties on its design-build contracts, which have become their contracting



Figure E2 Material and workmanship warranties.



Figure E3 Performance warranties.

method of choice over the past 10 years. A performance warranty includes material and workmanship, but since the contractor is responsible for some or all of the pavement design, it includes performance of the complete asphalt pavement.

All three countries use a 5-year warranty period for performance warranties. Although the design life of asphalt pavements is much greater than 5 years, that period provides for adequate performance measurement of the product without unduly burdening the contractor to warranty the product for the entire design life. In addition to rutting, cracking, and durability, performance measure of smoothness and friction are often used.

Performance warranties allow for contractor innovation in mix design and/or material installation. The host countries described varying levels of innovation that stemmed from the use of performance warranties, but all countries described a greater level of innovation than was available through material and workmanship warranties.

### **Best-Value Procurement**

All five of the host countries use best-value procurement in lieu of low bid. Best-value procurement involves awarding the contract on technical and/or performance items in addition to cost. Best-value criteria include safety, innovation, and environmental impact. Denmark also includes the bidding of additional years of warranty as a best-value criterion. In some cases, prequalification was used as a filter in the best-value process. Although the best-value criteria and weights varied, all of the hosts stated that it was critical to their warranty program. For warranties to function effectively, highway agencies and the industry must have a higher level of trust and greater confidence in the contractor's ability to perform. Best-value procurement is one mechanism to promote this trust and confidence.

### **Alternative Contracting**

Similarly to the United States, the European hosts are dealing with growing capital project needs, as well as a backlog of maintenance needs. They are also dealing with a shortage of staff and a changing role of government. All of the host countries are looking at alternative contracting as a mechanism to increase innovation without creating a burden on highway agency staff. Pavement performance contracts (PPCs) and DBFO contracts are extending warranty contracts up to 35 years and assisting with the growing needs.

**Pavement Performance Contracts**—PPCs extend performance warranties to include a warranty period that is closer to the design life of the pavement. In a PPC, the contractor is responsible for designing, constructing, and maintaining the performance of the pavement to prespecified levels. All of the host countries are employing or experimenting with some variety of pavement performance warranties, which have warranty periods of 11 to 20 years. In Germany, Spain, and the United Kingdom, the highway agencies are promoting PPCs. However, the industry is the catalyst for PPCs in Denmark and Sweden. In all of the countries, the PPC forms are developing with close government and industry collaboration.

Depending on how the contractor proposes to build the pavement, the maintenance can include a number of items from filling of isolated potholes and minor pavement remarking to a complete mill and overlay of a significant section of pavement. The highway agencies are simply looking to the industry to provide a pavement that performs to prespecified standards. The PPCs allow for much more innovation from the industry; however, the industry must be willing to take a substantial risk. The contractors must have design, construction, and maintenance competencies to compete for PPCs.

**Design-Build-Finance-Operate Contracts**—In Spain and the United Kingdom, the highway agencies are changing from service providers to owners and managers of the highway system. Both of these countries are turning a small fraction of their highway network over to the private sector for long-term financing, operation, and maintenance. The terms of the DBFO contracts studied on this scan were 25 to 30 years, but other European countries are experimenting with even longer periods. Drivers for the use of DBFO contracts range from a lack of public funding to a belief that private financing and maintenance delivers a higher quality product and provides benchmarks for public sector performance.

It should be noted that none of the host countries are using PPCs or DBFOs as a “silver bullet” for their transportation needs. Rather, they are taking a balanced contracting approach through the use of a variety of warranty contracts described in this document.

### **Conclusions and Recommendations**

The European host countries all believe that their long history of warranty application has improved





**Figure E4** Pavement performance contracts.

the performance of their highway and trunk road systems. Their warranty systems continue to evolve through a customer-focused partnership between government and industry. Best-value procurement and prequalification are vital elements of the warranty system. Material and workmanship warranties are used on all short-term warranties. Five-year performance warranties are in use when the contractor completes some level of design. The long-term performance warranties include design, construction, and some type of planned maintenance. The Europeans hosts use all of these warranties in balanced contracting approaches.

The European Asphalt Pavement Warranties Scan team included representatives from Federal, State, and local agencies, industry, and academia. The scan team offers the following recommendations on the basis of its observations of successful warranty programs in the European host countries.

**Federal Government**

**Warranty requirements:** The Federal government should require short-term material and workmanship warranties on all federally funded projects. This should be the first step in moving toward common use of long-term performance warranties in the future.

**Enable best-value and prequalification legislation:** Assist with enabling legislation to allow contract awards based on technical and quality factors in addition to cost (i.e., best-value and prequalification methods).

**Warranty resource center:** Create resource center(s) to facilitate and assist in implementing and evaluating warranties. The Federal government should act as a leader for the State, county, and local governments.



**Figure E5** Design-build-finance-operate contracts.

**State and Local Government**

- **Create model warranty documents:** Draft contract documents for warranty implementation with representation from all stakeholders. AASHTO should take the lead in the creation of these documents in collaboration with local governments and industry.
- **Implement material and workmanship warranties:** The State and local highway agencies should develop material and workmanship warranty programs through internal education and industry participation.
- **Implement short-term performance warranties:** State and local highway agencies should implement short-term performance warranties when it is appropriate for the contractor to perform the necessary design.
- **Enable best-value and prequalification procedures:** State and local highway agencies should work to enable legislation allowing contract awards based on technical and quality factors in addition to cost.

**Industry**

- **Education:** Develop an awareness and understanding of warranty issues and risks.
- **Participation:** Proactively participate in roundtable discussions on warranties.
- **Pilot projects:** Consider proposing on pilot projects.
- **Operation and maintenance competencies:** Consider expanding knowledge of operation and expertise of materials and products for future competitiveness.



# Overview

## Background

U.S. highway agencies are discussing and, to some extent, implementing warranty contracts on asphalt paving projects. These highway agencies believe they will receive improved performance from warranty contracts through a reduction in life cycle costs and introduction of contractor ingenuity during the design and construction process. In addition, these agencies see warranty contracting as a methodology for dealing with reduced staffing levels and a loss of expertise in the agencies. Concerns over definitions, roles, responsibilities, and appropriate allocation of risk are of major concern among all stakeholders. The European highway community has a long history with the use of short-term and long-term warranty contracting. This change toward the use of warranties in the United States, combined with the knowledge of warranties in Europe, led to the formation of the European Asphalt Pavement Warranties Scan. The goal of the scan was to learn from European experience to help develop a successful warranty program in the United States.

A warranty is a type of performance-based contract that guarantees the integrity of a product and the constructor's responsibility for the repair or replacement of deficiencies. Traditional U.S. construction contracts typically require the contractor to warranty the entire project for only 1 year after the completion of construction, but the design life cycles for all types of asphalt pavement are much longer. U.S. highway agencies must optimize the life cycle of initial construction products because funds are limited for capital construction, and even more limited for maintenance. Currently, driving on roads in need of repair and improvement costs motorists additional vehicle operating costs of US\$41.5 billion per year. Warranty contracts provide an opportunity to lower these vehicle operating costs by improving the quality of roads during their design life and minimizing the need for closures for maintenance operations.

## Purpose and Scope

In September 2002, a U.S. panel traveled to Europe to

review and document the policies and strategies used in Europe to determine risk assessment and administer warranty contracts. The use of warranties in Europe was documented in the 1990 European Asphalt Study Tour (EAST; FHWA 1990) and the 1994 Contract Administration Techniques for Quality Enhancement Study Tour (CATQUEST; FHWA 1994). Although these studies identified the use of warranties in Europe, they did not focus on the documentation and technology transfer of specific lessons learned. This report focuses specifically on the criteria, programs, and analytical tools used to establish pavement distress criteria for warranting asphalt pavement performance. Specifically, the panel went to Europe to study the following:

- Methodologies used to determine risk assessment for the government agency and contractor.
- Methodologies for administration of warranty contracts.
- Methodologies to select criteria to account for traditional performance indicators of rutting, fatigue cracking, and low temperature cracking.
- Practices to maintain prescribed levels of asphalt pavement smoothness and skid resistance.
- Criteria used in successful asphalt pavement warranties.
- Pavement performance prediction tools.

The panel evaluated policies and practices for potential application in the United States. It conducted meetings ranging from 2 to 8 hours in length over 2 weeks with those government agencies, academia, and private sector organizations involved with warranties and visited sites where innovative asphalt warranty contracting techniques were being applied. U.S. participants also shared their viewpoints and experiences in the spirit of mutually beneficial exchanges.

## Methodology

The Asphalt Pavement Warranties Scan was selected

## U.S. Parallel: Background Information on U.S. Warranties




**Figure 1.1** Warren Brothers warranty seal.

Pavement warranties are not new to the United States. From 1890 to 1921, Warren Brothers Paving owned a patent on hot mix asphalt (HMA). Warren Brothers provided a warranty for its products that lasted up to 15 years. The warranties covered both materials and workmanship. After 1921, the Warren Brothers’ patent expired. The asphalt market was opened up to competition and its warranty program was discontinued. Figure 1.1 is a brass seal that Warren Brothers used to roll into its pavements to identify its product and its warranty. This particular picture was taken in the New York area from pavement that was in use from 1919 to the early 1960s.

In the 1950s, the U.S. Federal government formalized its participation in the highway construction program. Warranties were not allowed because they were considered to be maintenance, and the Federal government could only participate in construction. In 1988, a Transportation Research Board (TRB) study produced Circular 386 – Innovative Contracting Practices, which described the possible application of warranties to highways. The Federal Highway Administration (FHWA) Special Experimental Project 14 was put into place in 1990 and allowed for the evaluation of warranties and other alternative contracting methods on Federally funded highway projects. In 1995, the FHWA mainstreamed most alternative contracting methods, including warranties, and many other States and local agencies began to evaluate the use

of warranties on their own. Figure 1.2 depicts the States in which the FHWA had approved warranty projects in 1999.

Developing and administering these new warranty contracts can be a challenge to agencies with little or no experience with them, but several European agencies have been using warranty contracting for decades. U.S. highway representatives documented the use of asphalt warranties in Europe in the early 1990s (European Asphalt Tour 1990; CATQUEST 1994). The vast European experience with warranties creates an opportunity for the United States to learn from their experiences and practices.

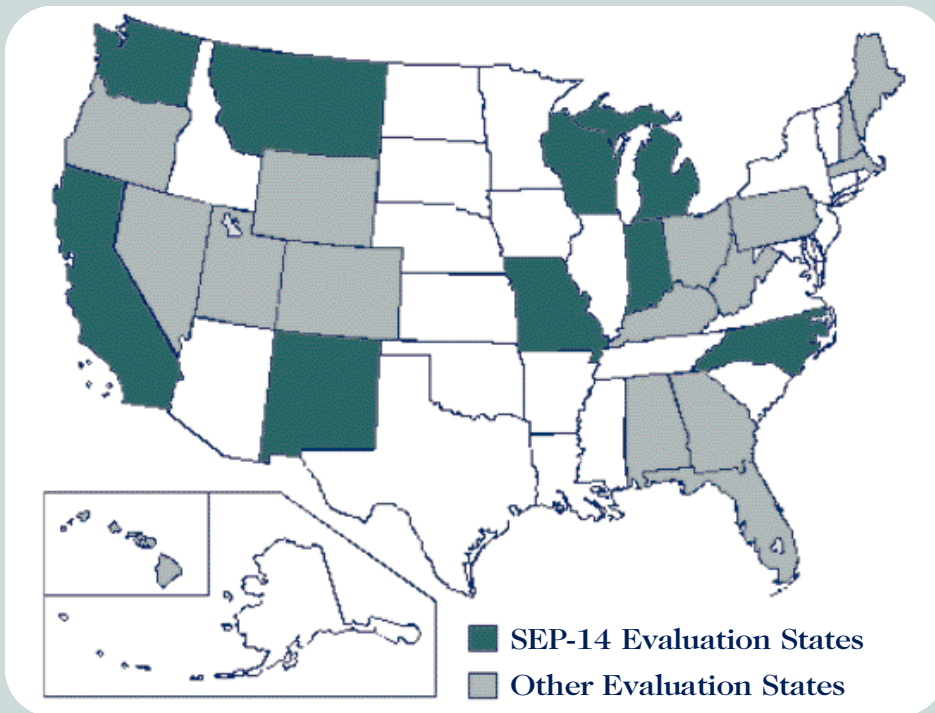

**Figure 1.2** Warranty evaluation States.



**John D'Angelo, P.E.**

(Co-Chair)  
Asphalt Materials Engineer  
Federal Highway Administration

**Gary C. Whited, P.E.**

(Co-Chair)  
Administrator  
Wisconsin DOT

**Keith R. Molenaar, Ph.D.**

(Report Facilitator)  
Assistant Professor  
University of Colorado at Boulder

**Steven C. Bower, P.E.**

Pavement Engineer  
Michigan DOT

**Jeffrey S. Russell, Ph.D., P.E.**

Professor and Chair, Construction,  
Engineering  
and Management Programs  
University of Wisconsin at Madison

**Gerald A. Huber, P.E.**

Associate Director of Research  
Heritage Research Group  
Representing: National Asphalt  
Pavement Association

**Richard K. Smutzer, P.E.**

Chief Highway Engineer  
Indiana DOT

**David R. Jones, IV, Ph.D.**

Pavement Technical Manager  
Trumbull Asphalt/Owens Corning  
Representing: National Asphalt  
Pavement Association

**James J. Steele, P.E.**

Division Administrator  
Federal Highway Administration

**Reaburn E. King**

Executive Vice President  
Michigan Asphalt Pavement Association  
Representing: National Asphalt  
Pavement Association

**Monte G. Symons, P.E.**

Infrastructure Team Leader  
Federal Highway Administration

**Timothy L. Ramirez, P.E.**

Chief, Engineering Technology &  
Information Division  
Pennsylvania DOT

**James W. Wood**

Director of Street Services  
City of Dallas  
Representing: American Public  
Works Association

**Jon F. Rice, P.E.**

Managing Director  
Kent County Road Commission  
Representing: National Association of  
County Engineers

y the TRB's National Cooperative Highway Research Program's (NCHRP) Panel 20-36 from a number of competing proposals for the 2002 funding cycle. Upon acceptance of the proposal, two co-chairs were named as representatives for the funding agencies: John D'Angelo, Asphalt Materials Engineer for the FHWA, and Gary Whited, Administrator, Division of Transportation (DOT) Infrastructure Development, Wisconsin State DOT for the American Association of State and Highway Transportation Officials (AASHTO). They joined representatives from the public and private sectors to represent a cross-section of the industry. The team members are shown in figure 1.3, and their affiliations are listed below. Complete contact information and biographical sketches for the scan team members are listed in appendix A.

The next step was to conduct a "desk scan" for the purpose of selecting the most appropriate countries for the scan tour to visit. The objective of the study was to maximize the time spent by the panel in reviewing its topics of interest. This desk scan employed a three-tier methodology of literature reviews, expert interviews/surveys, and synthesis. This methodology enabled collection of data from government agencies, professional organizations, and experts abroad who are most advanced in the scan topics. The literature review uncovered reports that documented use of asphalt pavement warranties in a number of countries in the late 1980s and early 1990s. It was suggested that a visit to these countries would provide insights into the long-term performance of warranty programs. The literature review also revealed activity in the related area of maintenance and concessions contracts. The survey revealed numerous U.S. and European contacts who provided interviews to help select the final countries to visit. For a copy of the 2001 Contract Administration Desk Scan, contact the Office of International Programs at <http://www.international.fhwa.dot.gov>.

The desk scan was presented to the U.S. scanning team, which held a meeting in Washington, D.C. to select the host countries. The team also finalized a "panel overview" document, which was sent ahead to the host countries to prepare them for the U.S. delegation. The panel overview explained the background of the study, the scope of the study, the sponsorship, team composition, topics of interest, and the tentative itinerary.


Before conducting the scan tour, the team prepared a comprehensive list of "amplifying questions" to further define the panel overview and sent the questions ahead to the host countries. The process of assembling the final list of questions took several iterations, with a final team meeting 8 months prior to the scanning tour. Some of the host countries responded to these questions in writing prior to the scanning tour while others used the questions to organize their presentations. An attempt was made to craft the questions precisely enough that the team would not miss any information that it anticipated, yet open-ended enough that new ideas—not envisioned by the U.S. scan team—could be brought to light by the host countries. Appendix B contains the amplifying questions that were sent to the host countries. Appendix C lists references that are cited within this report, and appendix D contains a list of European host representatives.

The delegation traveled to Europe from September 13-29, 2002. The visit consisted of a combination of meetings with highway agencies and practitioners, as well as site visits. The scan team visited Madrid, Spain; Koblenz, Germany; Copenhagen, Denmark; Crowthorne, England; Banbury, England; and London, England.

### Organization of the Report

The report combines definitions and illustrative case study examples of asphalt warranty techniques in Europe with critical analysis of the applicability of these techniques to U.S. contracting. Whenever possible, U.S. parallel examples are provided to amplify those techniques that are directly applicable. The report is organized into the areas of warranty use in Europe, warranty implementation, warranty evaluation, and alternative delivery methods, as shown in figure 1.4 on the following page.

**2002 Asphalt Pavement Warranties Scan  
Technology and Practice in Europe**

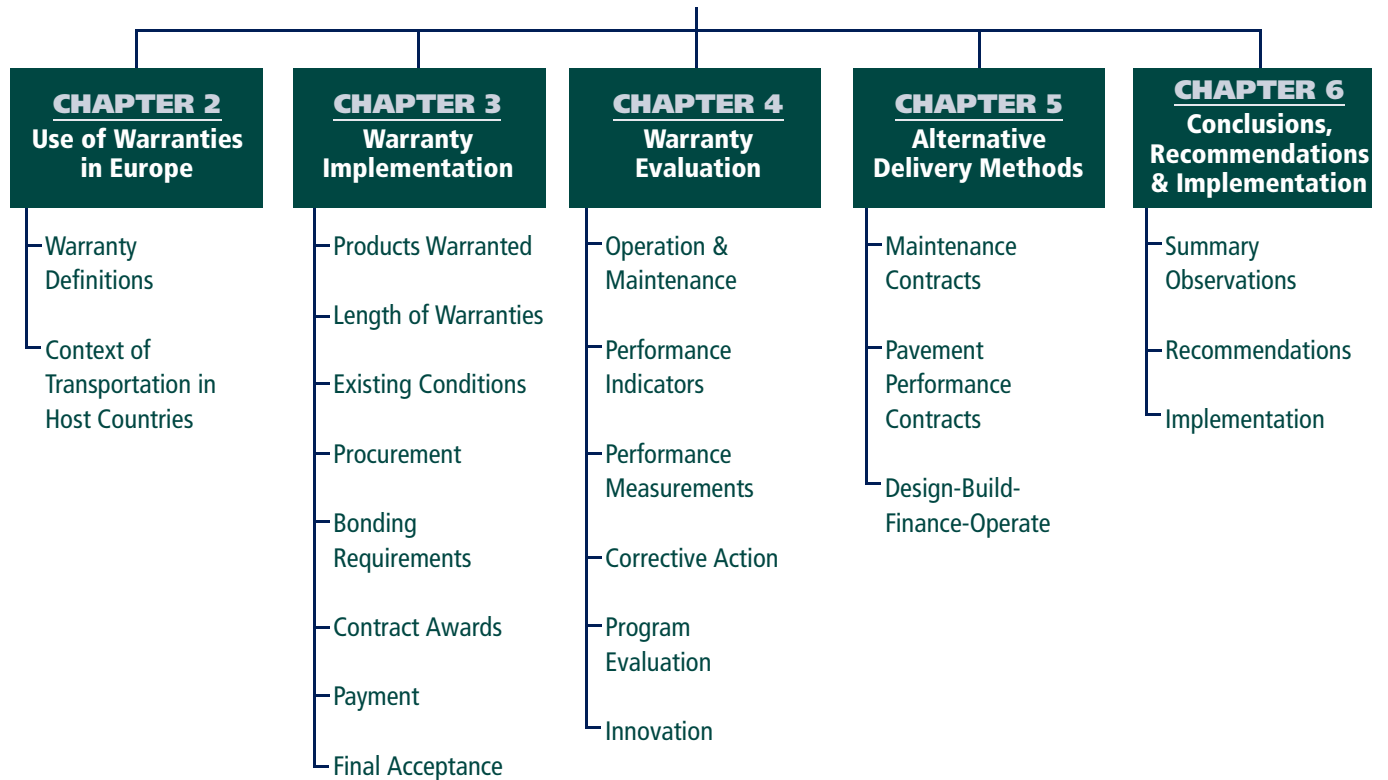

**Figure 1.4** Organization of the report.



# Use of Warranties in Europe

European highway agencies are not so different from U.S. agencies. European transportation systems have growing capital project needs as well as a backlog of maintenance needs. They face many of the same political, financial, societal, and environmental challenges found here in the United States. One major difference, however, is the use of asphalt pavement warranties. Asphalt pavement warranties are a fixture of the European highway contracting structure. In the European countries visited by the scan team, warranties of varying lengths have been used for 10 to 40 years. In fact, many of the European costs, most notably in Germany and Denmark, could not answer questions concerning the impetus for their warranty programs because the programs were initiated before they were born.

This chapter of the report introduces the fundamental warranty concepts used in Europe and being implemented in the United States and provides a context for the highway industry in Europe. It presents a set of definitions that are used throughout the remainder of the report. The context of the transportation community is then summarized for each of the countries visited. For better understanding of warranty use, the chapter presents the key aspects of how transportation is positioned within the political, economic, and technological structure. It provides items such as funding, owner structure, market structure, market competition, contractor associations, use of public-private partnerships, and the roles and responsibilities of the primary stakeholders in the transportation life cycle. Lastly, the

characteristics of European asphalt pavement warranties are summarized for reference throughout the remainder of the report.

## Warranty Definitions

Numerous different types of warranties have evolved in Europe and the United States. The following definitions describe the general categories of warranties (adapted from Anderson and Russell 1998; Colorado DOT [CDOT] 2001; Hamilton 2001).

**Warranty:** A type of performance-based contract that guarantees the integrity of a product and assigns responsibility for the repair or replacement of defects to the contractor.

**Warranty period:** The prespecified time in which the contractor is required to repair defects in the product. Warranty periods vary by type of warranty and type of product. The ideal warranty period should be long enough to provide assurance of pavement performance, but not so long as to unnecessarily inflate contract prices.

**Materials and workmanship warranties:** The contractor is responsible for correcting defects in work elements within the contractor's control during the warranty period. This includes distresses resulting from defective materials and/or workmanship. The owner is responsible for the pavement structural design. The contractor assumes no responsibility for pavement design or those distresses that result from the design. Some responsibility is shifted from



the owner to the contractor for materials selection and workmanship.

**Performance warranties:** The contractor assumes full responsibility for pavement performance during the warranty period. In effect, the contractor guarantees that the pavement will perform at a desired quality level. The contractor assumes some level of responsibility, depending on the specific project, for the structural pavement or mix decisions.

While the terms warranty and warranty period are used almost universally throughout the world, the specific definitions of warranty types are not as clear. Particular attention must be given to the difference between material and workmanship and performance warranties because the risk allocation, particularly for design liability, varies a great deal between the two warranty types.

### **Context of Transportation in the Host Countries**

The host countries for the scan were Denmark, Germany, Sweden, Spain, and the United Kingdom. The context of the transportation environment in these host countries is surprisingly similar to that of the United States. To better understand the environment in which these countries have implemented their warranty programs, it is useful to summarize the context of their transportation environment and their implementation of warranty programs.

#### ***Political, Economic, and Technological Structure***

The political, economic, and technological structure of the host countries lends some insight into the successes of their warranty programs. The scan team specifically chose host countries with transportation environments that are similar to that of the United States so that the warranty lessons learned could be implemented more easily. All of the countries have a free market economy. Most have similar federal government structures for funding and planning, and state/local government structures for construction, administration, and maintenance. Table 2.1 summarizes the context of the transportation environment in the host countries.

Although our transportation environments are similar, there are some notable differences between the United States and a number of the host countries. The level at which the federal government participates in the development of specifications and designs varies. Germany probably exhibits the most control over plans and specifications on traditional projects while the

Danish Road Directorate may give the most latitude to the industry in this area. In the area of PPPs, the United Kingdom yields much of the design control to the private sector while Germany and Spain maintain tighter control. The current U.S. system varies, but might be most closely related to the German system. The U.S. system is similar to that of the U.K. system prior to the formation of the British Highways Agency resulting from the Private Finance Initiative.

The host countries vary significantly in their use of PPPs to finance and maintain the structures. With the exception of Germany, all of the countries use some form of PPPs on a larger portion of their network than does the United States. The United Kingdom is most aggressively pursuing PPPs to build and maintain its network through the Private Finance Initiative. A portion of the United Kingdom's maintenance operations on major highways is undertaken by the private sector through term contracts. Likewise, much of Spain's and Sweden's maintenance is done through the private sector. The United Kingdom is also pursuing an aggressive DBFO program that could make up as much as 25 percent of the new construction program in the next 8 years. Spain has recently begun a more aggressive PPP program. Germany, on the other hand, experimented with PPPs and stopped using the delivery method because they were not seen as a good investment (although there are some stakeholders who would like to open the doors to PPPs in the future again). Sweden and Denmark have used PPP tolls for bridges on a limited basis. All of the countries are employing some form of pavement performance contracts (PPCs) to tie construction, maintenance, and financing together. Denmark, Sweden, and the United Kingdom are more aggressively pursuing PPC programs. PPCs will be discussed in depth later in this report.

The most significant difference between the host countries and the United States is their allocation of maintenance operations to the private sector. Germany and Denmark most closely resemble the United States in that they maintain their highway networks through some portion of the government. Spain, Sweden, and the United Kingdom all rely on the private sector for a significant portion of their highway maintenance. This is accomplished through a series of term maintenance agreements where routine maintenance and repair is done in accordance with performance contracts. However, the warranty contracts in those countries that perform

	Denmark	Germany	Spain	Sweden	United Kingdom
<b>Primary Transportation Funding</b>	<ul style="list-style-type: none"> <li>• Motorways: Funding provided by state government</li> <li>• Highways: Funding provided by counties</li> </ul>	<ul style="list-style-type: none"> <li>• Funding provided by central government for 16 states (Länders)</li> </ul>	<ul style="list-style-type: none"> <li>• Funding provided by central government for 17 autonomous regions</li> </ul>	<ul style="list-style-type: none"> <li>• Funding provided by central government for 96% of the traffic</li> <li>• Private funding for the other 4% of rural roads</li> </ul>	<ul style="list-style-type: none"> <li>• Funding provided by central government and private funds through the Private Finance Initiative</li> </ul>
<b>Owner Structure</b>	<ul style="list-style-type: none"> <li>• Democracy with constitutional monarchy</li> <li>• Motorways: The state government administers construction and maintenance activities</li> <li>• Highways: The counties administer construction and maintenance activities</li> </ul>	<ul style="list-style-type: none"> <li>• Central government and states</li> <li>• States administer construction and maintenance activities on behalf of the federal government</li> </ul>	<ul style="list-style-type: none"> <li>• Democracy with constitutional monarchy</li> <li>• The state government administers construction and maintenance activities</li> </ul>	<ul style="list-style-type: none"> <li>• Democracy with constitutional monarchy</li> <li>• Until recently, the state maintained a quasi-private highway construction company, but it has recently opened the market to competition and now administers the construction and maintenance</li> </ul>	<ul style="list-style-type: none"> <li>• Democracy with constitutional monarchy</li> <li>• The central government administers design and construction through the Highways Agency that reports to the Secretary of State for Transport</li> </ul>
<b>Market Structure</b>	<ul style="list-style-type: none"> <li>• Member of the European Union (EU)</li> <li>• Free market</li> <li>• There are nine main contractors that construct highway projects in Denmark</li> </ul>	<ul style="list-style-type: none"> <li>• Member of the EU</li> <li>• Free market</li> <li>• Healthy competition</li> <li>• There are approximately 3,500 firms with road-construction capabilities</li> </ul>	<ul style="list-style-type: none"> <li>• Member of the EU</li> <li>• Free market</li> <li>• Healthy competition</li> <li>• There are at least six large, multinational firms in addition to smaller contractors</li> </ul>	<ul style="list-style-type: none"> <li>• Member of the EU</li> <li>• Free market</li> <li>• The four major pavement contractors in Sweden are vertically integrated (they own aggregate sources, have asphalt plants, own work site equipment, and have the capacity to do testing and quality control)</li> </ul>	<ul style="list-style-type: none"> <li>• Member of the EU</li> <li>• Free market</li> <li>• Healthy competition</li> <li>• There are 25 to 30 major firms with road-construction capabilities in addition to smaller contractors</li> </ul>
<b>Use of Public-Private Partnerships (PPPs)</b>	<ul style="list-style-type: none"> <li>• PPPs are only employed on two large bridges and a few local roads</li> <li>• New long-term pavement performance contracts, which incorporate financing, are being used by municipalities</li> </ul>	<ul style="list-style-type: none"> <li>• Minimal use of PPPs because of poor experience with system</li> <li>• Future use of PPPs is possible</li> </ul>	<ul style="list-style-type: none"> <li>• Significant examples of PPPs on new highways</li> <li>• Maintenance is being contracted to the private sector</li> </ul>	<ul style="list-style-type: none"> <li>• There is a long history of PPPs for maintenance contracts</li> <li>• Limited use of PPPs on road networks</li> <li>• Long-term pavement performance contracts, which incorporate financing, have been used for 20 years</li> </ul>	<ul style="list-style-type: none"> <li>• The private sector contracts all maintenance</li> <li>• The Highways Agency began using design-build-finance-operate (DBFO) contracts of long duration 8 years ago</li> <li>• Up to 25% of the new program may be DBFO in the next 8 years</li> </ul>
<b>Roles and Responsibilities of the Primary Stakeholders in the Transportation Life Cycle</b>	<ul style="list-style-type: none"> <li>• The state and county governments finance and own most of the transportation system</li> <li>• The state and county governments set construction specifications and supervise construction</li> <li>• The state and county governments operate and maintain the network with the exception of municipal pavement performance contracts</li> </ul>	<ul style="list-style-type: none"> <li>• The federal government finances and owns the transportation system with the exception of tolls</li> <li>• The states set construction specifications and supervise construction</li> <li>• The states operate and maintain the network with the exception of tolls</li> </ul>	<ul style="list-style-type: none"> <li>• The state government finances and owns most of the transportation system with the exception of tolls and shadow tolls</li> <li>• The federal government sets construction specifications and supervises construction</li> <li>• The state and a series of term contractors operate and maintain the network with the exception of tolls</li> </ul>	<ul style="list-style-type: none"> <li>• The state government finances and owns most of the transportation system</li> <li>• The state government sets construction specifications and supervises</li> <li>• Due to the relatively small number of contractors, the state has begun to own its own materials from which the industry can purchase</li> <li>• The state and a series of term contractors operate and maintain the network</li> </ul>	<ul style="list-style-type: none"> <li>• The federal government finances and owns most of the transportation system with the exception of tolls and shadow tolls</li> <li>• The federal government sets construction specifications and supervises construction with the exception of design-build contracts and PPPs</li> <li>• The private sector maintains the roads through a series of term maintenance contracts and PPPs</li> </ul>

**Table 2.1** Context of transportation in host countries.

their own maintenance are similar to those that rely on the private sector for maintenance. In fact, the performance indicators for maintenance and warranties are based on the same measurements.

**Warranty Program Background**

The scan team was interested in the host countries' original motivation for using warranty programs. A series of questions were asked about how long the countries have been using these warranties, the percentage of the transportation programs that use warranties, the impact of the warranty program on the internal staff, the impact on the private marketplace, the current goals of the warranty program, and the description of internal and external barriers that were encountered in implementing the asphalt pavement warranty program. The host country representatives had difficulty answering these questions about the motivation for their traditional warranty

program because the majority of programs had been in use well before the representatives began their employment with the agency. A number of hosts, specifically the Danish Road Directorate, Germany, and the Swedish National Road Association, could not specifically state when the warranty programs started because the warranty programs had been in use for more than 30 years. Table 2.2 provides a summary of the warranty program background, including when the programs started and the current warranty periods.

As seen in table 2.2, traditional material and workmanship warranties have been in use by all the countries for at least 30 to 40 years. However, the warranty programs have evolved in recent years to include performance warranties through the use of design-build, DBFO, and PPCs. All host countries employ at least material and workmanship

	Denmark	Germany	Spain	Sweden	United Kingdom
<b>Duration of Warranty Program</b>	<ul style="list-style-type: none"> <li>• 1960s or earlier for traditional projects</li> <li>• Late 1990s for PPCs</li> </ul>	<ul style="list-style-type: none"> <li>• 1970s or earlier for traditional projects</li> <li>• 2000 for PPCs</li> </ul>	<ul style="list-style-type: none"> <li>• 1970s or earlier for traditional projects</li> <li>• 1997 for DBFO</li> </ul>	<ul style="list-style-type: none"> <li>• 1960s or earlier for traditional projects</li> <li>• 1980s for PPCs</li> </ul>	<ul style="list-style-type: none"> <li>• 1970s or earlier for traditional projects</li> <li>• Late 1980s for design-build</li> <li>• 1994 for DBFO</li> </ul>
<b>Percentage of Projects with Warranties</b>	<ul style="list-style-type: none"> <li>• All projects employ warranties, but the warranty period varies</li> </ul>	<ul style="list-style-type: none"> <li>• All projects employ warranties, but the warranty period varies</li> </ul>	<ul style="list-style-type: none"> <li>• All projects employ warranties, but the warranty period varies</li> </ul>	<ul style="list-style-type: none"> <li>• All projects employ warranties, but the warranty period varies</li> </ul>	<ul style="list-style-type: none"> <li>• All projects employ warranties, but the warranty period varies</li> </ul>
<b>Warranty Period</b>	<ul style="list-style-type: none"> <li>• 5 years for traditional contracts</li> <li>• 10 years or more for PPCs</li> </ul>	<ul style="list-style-type: none"> <li>• 4 years for traditional contracts</li> <li>• 20 years for PPCs</li> </ul>	<ul style="list-style-type: none"> <li>• 1 year for traditional projects</li> <li>• 30 years for DBFO</li> </ul>	<ul style="list-style-type: none"> <li>• 5 years for traditional contracts</li> <li>• 5-8 years for performance warranty projects</li> </ul>	<ul style="list-style-type: none"> <li>• 2 years for traditional</li> <li>• 5 years for design-build</li> <li>• 30 years or more for DBFO</li> </ul>

**Table 2.2** Background of warranty program.

Type of Contract	Prior to 2002	2002	2007 and Beyond
Design prescribed by owner	100%	90%	75%
Performance based	—	10%	20%
Design, build, operate	—	—	5%

*Note: Chart details the history of warranty use and the projected future use of warranties (approximately 250 contracts per year).*

**Table 2.3** Evolution of Swedish warranty program (contract type).

Type of Contract	Prior to 2002	2002	2007 and Beyond
Design prescribed by owner	1-2 years	5 years	5 years
Performance based	—	5-8 years	5-12 years
Design, build, operate	—	—	10-15 years

able 2.4 Evolution of Swedish warranty program (warranty period).

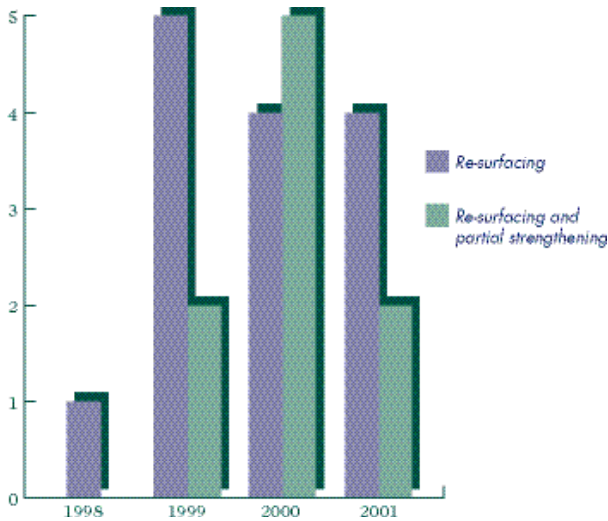


figure 2.1 Danish pavement performance contracts (number of contracts).

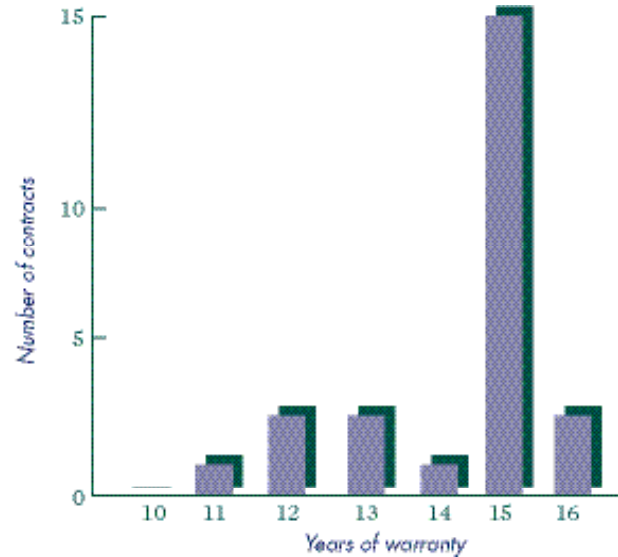


Figure 2.2 Danish pavement performance contracts (warranty periods).

### U.S. Parallel: U.S. Warranty Use

In December 2000, the FHWA issued a Briefing on Warranty Clauses in Federal Aid Highway Contracts (FHWA 2000) that outlined the use of warranties in federal-aid highway contracts in the United States. In this briefing, it listed the following States as using pavement-related warranty provisions.

Product	Range of Warranty Periods	States
Asphaltic Concrete/Rubberized Asphalt	3-8 years	AL,CA,CO, FL,IN, ME,MI,MO, MS, OH,NM,UT,WI
Asphaltic Crack Treatment	2 years	MI
Chip Sealing	1-2 years	CA,MI
Microsurfacing	2 years	CO, MI,NV, OH
Pavement Marking	2-6 years	FL,MT, OR, PA,UT, WV

Numerous other States have used warranties since this 2000 FHWA briefing. These States include, but are not limited to, Illinois, Kentucky, Louisiana, Minnesota, Virginia, and Washington. In addition to asphalt paving, some States are also using warranties for concrete paving, bridge painting, and intelligent transportation system components. Although the United States does not have the long history of pavement warranty experience found in Europe, warranties are in use and growing throughout the country.

warranties in the majority, if not all, of their projects. The use of performance warranties varied from country to country. For instance, the British Highways Agency could not provide the scan team with exact figures, but stated that design-build projects with performance warranties is its contracting method of choice. They also are employing an aggressive DBFO initiative and private term maintenance contracts, which include a warranty for performance throughout the life of the contracts (5 to 30 years or more). Germany uses 4-year material and workmanship warranties on all of its projects and has recently let two “functional contracts” that include a warranty of the product for 20 years. The Danish Road Directorate and the Swedish National Road Association were able to provide more specific data on their types of contracts, as seen in tables 2.3 and 2.4 and figures 2.1 and 2.2.

The motivation on the part of host countries for moving toward performance warranties of longer duration is similar to the reasons that we are moving toward warranties in the United States. The host countries stated that the longer-term performance warranties allow them to apply innovative technical and financial solutions to the goal of better performing pavements. Where short-term material and workmanship warranties presented little or no effect on the internal staff and the marketplace, the performance warranties were requiring new thinking on the part of both the highway agencies and the marketplace.

### Conclusions

Asphalt pavement warranties are standard practices in all of the host countries and have been for at least 30 to 40 years. All of the countries will continue to use material and workmanship warranties in their standard contracting approaches. The German hosts stated the goals of their material and workmanship warranty program perhaps most succinctly through a description of the duties of an asphalt contractor described under German law.

1. Constructing projects in compliance with government specifications;
2. Constructing roadways that are state of the art, technically; and
3. Constructing roadways that have no defects that decrease their value or usability.

While all host countries generally shared with strict views on contractor duty, there was a sense of partnership and innovation toward the future with the use of performance warranty contracts. All of the host countries are moving toward pavement performance warranties and other method of tying the contractor into the full life cycle of the product. There is a focus on quality and best value for the road user that is being delivered through a closer partnership between the public and private sector. The U.S. highway industry has much to learn from the extremely mature European warranty programs.

# Warranty Implementation

European warranty programs evolved independently and therefore have some differences in their implementation. This chapter describes the technical and management aspects of the individual warranty programs in the host countries. It describes in detail the products warranted, length of warranties, scope definition, precontract award, contract award, payment and final acceptance, and operation and maintenance.

It should be noted that this chapter specifically discusses material and workmanship and short-term (5 years or less) performance warranties. The general definition of these warranties is described in chapter 4, while long-term performance warranties, PPCs, and BFO contracts are discussed in chapter 5.

## Products Warranted

The specific products warranted under asphalt pavement warranties varied by country and warranty type. In standard Danish and Swedish contracts, only the asphalt layers delivered by the contractor are subject to warranty. Road markings are also

warranted when relevant. Germany warrants hot mix asphalt pavement, subbase aggregate, and subgrade. Germany also places the responsibility for all of these products on the prime contractor. The prime is responsible for all of these items independent of whether it is an earthwork contractor, paving contractor, or other prime. Products warranted in U.K. asphalt pavement warranties vary from the surface treatment material only for maintenance projects to the entire roadway project on design-build projects. Like Germany, the United Kingdom places the responsibility of the warranty on the prime contractor.

## Length of Warranties

As briefly discussed in chapter 2, the warranty period of material and workmanship warranties and short-term performance warranties varied between 2 and 5 years in the host countries. The hosts interviewed by the scan team could not comment on the original decision as to the length of the warranty periods, because these decisions evolved long before any of the hosts began working in the programs. Table 3.1 depicts the warranty periods, type of

Country	Warranty Period	Warranty Type	Specification Type
United Kingdom (design-bid-build)	2 years	Material and workmanship	Method
Spain	1 year	Material and workmanship	Method
Germany	4 years	Material and workmanship	Method
Denmark	5 years	Short-term performance	End result
Sweden	5 years	Short-term performance	End result
United Kingdom (design-bid)	5 years	Short-term performance	End result

**Table 3.1** Host country warranty periods.



## U.S. Parallel: Warranty Length

Warranty periods in the United States vary on a State-by-State basis. The FHWA and the Michigan DOT conducted a Pavement Warranty Symposium in May 2003 (Pavement Warranty Symposium 2003). As part of this symposium, they conducted a survey of the State transportation agencies that attended. The following table provides the lengths of warranties reported by the States.

Colorado, Florida, Illinois, Indiana, Michigan, Minnesota, and Ohio have all used material and workmanship warranties with lengths of 2 to 7 years. They all provide method specifications on these warranties. The design process on these projects is similar to nonwarranted projects.

Florida, Michigan, Minnesota, and Wisconsin have 5-year performance warranties in which they measure performance and provide end result specifications. For example, Wisconsin provides pavement thickness and type of base, and the contractor is responsible for mix design, material selection, quality control, construction, and maintenance for 5 years. Minnesota and Florida use a similar 5-year performance warranty on their design-build contracts.

State	Warranty Period	Warranty Type	Specification Type
Minnesota	2 years	Materials and workmanship	Method
Colorado	3 years	Materials and workmanship	Method
Florida	3 years	Materials and workmanship	Method
Illinois	5 years	Materials and workmanship	Method
Indiana	5 years	Materials and workmanship	Method
Michigan	5 years	Materials and workmanship	Method
Ohio	7 years	Materials and workmanship	Method
Wisconsin	5 years	Short-term performance	End result
Florida (design-build)	5 years	Short-term performance	End result
Minnesota (design-build)	5 years	Short-term performance	End result
Michigan (performance)	7 years	Short-term performance	End result

The warranty projects described above represent a very small portion of the States' program. At the time of this report, Michigan has employed various types of pavement warranties on more than 400 projects, Wisconsin has used them on more than 45 projects, and Ohio has used them on 34 projects. There were fewer than 50 warranty projects in the other seven States combined at the time of this report. The States listed above are still in the formative stages of their warranty programs. The warranty period, warranty type, and specification type were changing and evolving in all of these States at the time of this report.

warranty, and type of specification for the host countries. The period listed represents the longest warranty period for the product or performance measure on the entire pavement. Some warranties have varying lengths on products and performance indicators as described on the following pages.

In standard U.K., Spanish, and German contracts, the host country's highway agency completes the design in a method specification fashion. The host countries required material and workmanship warranties in these standard contracts. The United Kingdom employed a 2-year warranty period, Spain employed a 1-year period, and Germany employed a 4-year period. In the case of agency-supplied design, the highway agencies are only asking for material and workmanship warranties.

For short-term performance warranties, the highway agencies provided an end result specification and gave the contractors more flexibility in material choice and mix design. Standard Danish and Swedish contracts, as well as U.K. design-build contracts, utilize end result specifications by the agencies. The warranty period for these contracts is 5 years in Denmark, Sweden, and the United Kingdom.

The Danish Road Directorate provided us with more detail on the length of the individual performance requirements. The Danish process was summarized in the following seven steps:

- Preparation of project and pavement design end result specification.
  - Performed by agency or consulting firm.
- Preparation of tender documents.
  - Performed by agency or consulting firm.
- Tender.
  - Low bid or economical most feasible bid using best-value system.
- Award of contract.
- Construction.
- Hand over.
  - Initial inspection performed by agency and contractor.
- Period of warranty.
  - Assessment of performance performed by agency.

The Danish system works within established functional pavement requirements that are correlated to the end result specification. The highway agency has established a set of warranty peri-

ods that vary with these functional pavement requirements.

As seen in table 3.2, surface regularity and profile and drainage of surface water are only warranted for the first year of the product. Friction, rutting, instability, and durability are warranted for the full 5 years. The actual performance measures for each of these functional pavement requirements are discussed in the next chapter. The Danish system recognizes that the ideal warranty period should be long enough to provide assurance of pavement performance, but not so long as to unnecessarily inflate contract prices.

Functional Pavement Requirements	Warranty Period
Surface regularity	1 year
Profile and drainage of surface water	1 year
Friction	5 years
Rutting	5 years
Instability	5 years
Durability (raveling, joints, cracking, potholes)	5 years

**Table 3.2** Danish functional pavement requirements and warranties.

The Danish system also uses a bidding technique that allows contractors to offer alternate designs with longer life cycles in consideration for a discounted bid. Normally in asphalt pavement warranties, the individual highway agency uses the bidding document to describe the expected design life for the technical solution. However, the Danish system allows contractors to present an alternative solution during the bidding process. If the technical solution is evaluated to have a longer design life, the alternative bid may be accepted by the agency, thus rewarding the contractor through a discounted bid in the evaluation period. Table 3.3 on the following page provides an example from an asphalt paving project in Ribe County, Denmark, from 2002.

The Danish Road Directorate design provided to the contractors in table 3.3 had a design life of 14 years. "Contractor C" provided a design with a design life of 15 years as confirmed by the Directorate. Rather than award the bid on a first cost basis, the Directorate uses an annuity (average yearly value in present worth) to award the contract. Although Contractor C's bid was the highest first cost, it was

Contractor	Tender	Expected Service Life	Added Service Life	Avg. Yearly Cost*
	DKK**	Years	Years	DKK
A	\$1,393,975	14		\$140,825
B	\$1,371,460	14		\$140,825
C	\$1,403,205	14	1	\$140,825

\* The average yearly cost is used to compare individual bids. The average yearly costs are calculated by multiplying the total present value with the factor "K".

$$K = r * (1+r)^n / ((1+r)^n - 1)$$

r = internal interest rate of 5 percent annually

n = service life in years

\*\*Danish Krone.

**Table 3.3** Danish bid evaluation with extended life cycle.

awarded the bid on the basis of its lowest average yearly cost.<sup>1</sup>

The warranty period length varies across the host countries and, in most cases, within the countries. The host countries strive to select the warranty period length that: (1) provides assurance of pavement performance, without unnecessarily inflating contract prices, and (2) provides the optimum opportunity for innovation from the contracting community. Material and workmanship warranties employ method specifications and are shorter term (1 to 4 years). Short-term performance warranties employ end result specifications and have a 5-year warranty period.

**Definition of Existing Conditions**

The project scope definition process was not absolutely consistent throughout the host countries, but it shared many of the same attributes. Many of the differences stemmed from historical practices within the host countries, as well as the type of specification being used (method or end result).

In all of the host countries, the highway agencies and not the contractors determine the existing traffic loads and climatic conditions for the pavement design, although some of the countries employ consultants for this task. These traffic loads and climatic conditions are used for design purposes and dictate

the terms of the warranty. In material and workmanship warranties, as well as short-term performance warranties, the contractors rely on these data for design. The results of inaccurate design data are discussed in the next chapter. It should also be noted that contractors are required to collect their own traffic data and make their own traffic projections in the case of longer-term PPCs and DBFO contracts, as described in chapter 5.

**Procurement**

The European host countries' procurement award processes vary significantly from that in the United States. All of the host countries allow for past performance and other nonprice factors to be incorporated into the contractor selection. They noted that this process was critical to the success of their warranty programs. The incorporation of past performance and other nonprice factors into the procurement process correlated with both the initial selection of more qualified contractors and more accountability in the enforcement of any corrective action required under the terms of the warranty. The two main methods of incorporating nonprice factors into procurement are project-based prequalification (short listing) and best-value procurement.

**Project Prequalification (Short Listing)**

U.S. highway agencies are accustomed to using prequalification processes for contractors on an annual basis, but these prequalification processes are usually quite general and the process is not used on a project-by-project basis. Germany, Spain, and the United Kingdom employ a project-based prequalification process, which is commonly referred to as short listing in U.S. public building construction. These European systems are similar to those used in U.S. design-build highway procurement systems.

The United Kingdom employs a strenuous project prequalification process for contractors bidding all project types, but it is even more strict in its design-build procurements. Spain employs a rigorous prequalification process, particularly on its maintenance procurements. The German Federal Ministry of Transport also employs a project short-listing process. Project prequalification criteria vary by country and project, but the following general requirements were noted as short-listing criteria by each country:

<sup>1</sup> The example shown in Table 3.3 is the cost portion of a more comprehensive best-value procurement process. The entire procurement process is shown in Figure 3.2 later in this chapter.

**United Kingdom:** past experience, performance rating, financial soundness, and quality of the company's human resources procedures.

**Spain:** minimum staffing and equipment standards of the contract (for example, a professional engineer is required to be on staff; minimum work force and required equipment is available).

**Germany:** bidder's staffing, financial condition, work experience, and past quality of work being "state of the art."

The Danish Road Directorate and the Swedish National Road Association do not use a project-based prequalification process as a rule given the small number of contractors in their countries. However, the Swedish National Road Association did note short listing for unique projects on the basis of the availability of special resources on selected projects. Sweden's annual prequalification process also includes specific elements, such as economic strength, environmental requirements, and safety requirements.

**Best-Value Procurement**

This key procurement difference between the United States and the European hosts involved the use of best-value procurement rather than a reliance on low-bid selection. All of the countries award on a best-value" procurement process. A best-value procurement process is defined as:

*A procurement process where price and other key factors are considered in the evaluation and selection process to enhance the long-term performance and value of construction.*

All of the host countries pointed to the use of best-value procurement as a critical component in the success of their warranty programs. For warranties to function effectively, highway agencies and the industry must have a higher level of trust and greater confidence in the contractor's ability to perform. Best-value procurement is one mechanism to promote this trust and confidence.

The mechanics of the best-value processes varied by country, but all of the processes shared some common characteristics. As shown in figure 3.1, the goal of a best-value selection is to balance cost with noncost factors to achieve long-term performance and value of construction for the public. All of the systems employ a two-envelope bidding (or proposal) system. The contractor submits a price proposal in a separate envelope from the technical (or qualifications) proposal. The technical envelope is always assessed (or scored) prior to the opening of the price proposal. Opening the price proposal occurs only after the assessment of the technical proposal to ensure that the price proposal will not influence the assessment of the technical offer.

The criteria assessed in the technical proposal varied on a project-by-project basis throughout the host countries. Value can be added to projects through two general categories: contractor qualifications or contractor enhancements to the project. Contract qualifications are assessed through criteria such as past experience, past performance, project personnel, management structure, etc. Contractor enhancements vary greatly, but can include time-



**figure 3.1** Common attributes of European best-value procurement procedures.

related issues, design enhancements, traffic management plans, safety plans, environmental mitigation, etc. The owners choose these best-value parameters and create evaluation criteria from them on a project-by-project basis.

A key to success in best-value procurement involves the transparency of evaluation plans. Procurement documents must clearly convey how the evaluation criteria will be scored and how the cost and technical proposal will be combined. Transparent criteria and scoring methods convey to the contractors how they will be evaluated and what they should focus on in their proposals. These processes must be transparent to the proposers so that they know how to weight their costs and efforts in their proposals. Procurement documents must clearly convey the owner’s project goals if the owner is to receive the best proposals.

The manner in which the tradeoff analysis is conducted between the price and technical proposals varies by country and by project within each country. Some examples only employ two criteria of price and qualifications or past performance. If the lowest price comes from the highest technical rating, then the project is awarded to the lowest bidder. If the lowest bidder does not have the highest technical rating, then the agency performs a tradeoff analysis to determine if the higher technical scores provide the public with better long-term value. If it can be determined that better value is achieved from one of the higher technical offers, then the award is made to a company other than that offering the lowest bid.

Some of the best-value decisions account for more than just price and qualifications. In these cases the tradeoff analysis is more complex and requires more intricate award methods. The Swedish National

**Project Description**

The best-value procurement method described was used on an asphalt paving project in Ribe County, Denmark, in 2002.

**Best-Value Evaluation Criteria**

- Technical evaluation
- Inconvenience during construction
- Environment

**Best-Value Award Algorithm**

Contractor	Tender	Expected Service Life	Added Service Life	Average Yearly Cost	Technical Evaluation	Inconvenience During Construction	Environment	Economical Most Feasible Bid**
	DKK	Years	Years	DKK	Points (E)	Points (U)	Points (M)	DKK
A	1,393,975	14		140,825	4	4	4	125,193
B	1,371,460	14		138,550	5	4	5	120,836
C	1,403,205	14	1	135,188	5	5	4	117,903

\* The average yearly cost is used to compare individual bids. The average yearly costs are calculated by multiplying the total present value with the factor "K".

$$K = r \cdot (1+r)^n / ((1+r)^n - 1)$$

r = internal interest rate of 5 percent annually  
n = service life in years

\*\* Economical most favorable bid = average yearly cost / F

$$F = (1 + \text{Points (E)}/100) * (1 + \text{Points (U)}/100) * (1 + \text{Points (M)}/100)$$

**Figure 3.2** Danish best-value example for asphalt paving bids.



oad Association and the Spanish Road Association offered two examples of best-value methods that include evaluation criteria such as past performance, personnel, management plans, technical approach, and alternate bids. Three examples are shown in figures 3.2, 3.3, and 3.4. Figure 3.2 is an extension of table 3.3.

All of the host countries pointed to prequalification and best-value selection as a key to the success of their warranty programs. They stated that the use of on-price factors in the award of future projects motivated the contractors toward better construction performance and more amicable negotiations of solutions to any problems encountered during the warranty period.

**Bonding Requirements**

The use of warranty bonds is standard practice in the United States, but bonds are not found on all projects in Europe. Bonds insure a contractor’s financial solvency during the warranty period in case any remedial work is required. The key difference in the countries that required bonds was in the bond amount. The German Federal Ministry of Transport, the Danish Road Directorate, and the Swedish National Road Association required some type of warranty bond while the United Kingdom had no bonding requirements. Figure 3.5 depicts the bonding requirements of the host countries.

For projects over 250,000 Euros, the German Federal Ministry of Transport requires a bond equal to 5 percent of the construction cost through project acceptance (performance bond), and then reduces the bond to 2 percent throughout the remainder of the project (warranty bond). The German contracts may involve several different warranties for different elements of large jobs, some of which may have different warranty periods and varying portions of the total project cost.

Standard Danish contracts use a declining bond rate system. A performance bond in the amount of 15 percent of construction costs is required during construction. A warranty bond of 10 percent is required during the first year of the warranty period, but the amount is then reduced to 2 percent for the final four years of the contract. Recall that the standard Danish warranty period is 5 years. The Danish Road Directorate thinks that these amounts better represent the risk involved in the construction and warranty process. A bond of 10 percent could be used

**Project Description**

The best-value procurement method described was used on all asphalt-resurfacing projects in the Mitt Region of Sweden during 2001.

**Best-Value Evaluation Criteria**

- Price
- Past performance
- Personnel
- Management plans
- Alternate bids

**Best-Value Award Algorithm**

The best-value selection system is a weighted criteria method based on a 75-point score for price and a 51-point score for the technical aspects of the proposal as translated below. Award is made to the proposal with the highest point total.

**Price Proposal**

0-75 Bid amount for main proposal

Points for bid amounts by contractors under consideration are given on a diminishing scale starting at 75 points for the lowest bid to 0 points for twice the amount of the lowest bid.

**Technical Proposal**

- 0-4 Main bid and alternative bids/proposals
- 0-1 The contractor submits a clean bid for the desired product
- 0-3 The contractor offers interesting/relevant side proposals/side bids
- 0-12 Offering organization with references
- 0-5 Main organization (primary project team management plan)
- 0-5 Additional organization (secondary project team management plan)
- 0-2 In charge of marking
- 0-5 Quality (for mass groups)
- 0-3 Measures
- 0-2 Control methods
- 0-5 Quality of pavement operation plans
- 0-4 Environment – environmentally adjusted work methods

**Figure 3.3** Swedish best-value example for asphalt paving bids.



**Project Description**

The project involves a 5-year performance contract for the maintenance of highways, including asphalt paving, stripping, landscaping, emergency response, etc.

**Best-Value Evaluation Criteria**

- Price
- Technical approach
- Management plan
- Facilities and equipment

**Best-Value Award Algorithm**

The best-value selection system is a weighted criteria method. The criteria considered for the award are the quality of the technical solution and the economic offer. The weights used are 70 percent and 30 percent, respectively.

**Global Score**

The global score (PG) of every offer will be defined as:  $PG = 0.7(PT) + 0.3(PE)$

where, PT: Technical score  
PE: Economic score

The bidder with the highest PG will be defined as the apparent winner.

**Technical Score**

The technical score, PT, has a maximum of 100 points (see evaluation criteria above).

**Economic Score**

To weigh the economic offer, PE, from the N economic offers, the following algorithm is used.

B1) The calculation is made based on the economic proposals by means of linear interpolation, according to the straight line defined by both points P1 (lowest price, 100) and P2 (estimate of solicitation, minimum score). The method is as follows:

P1: the lowest price is assigned a maximum score equal to 100 points

P2: the corresponding minimum corresponds with the following formula:

$$\text{Minimum score} = 100 \times \text{lowest price} / \text{solicitation budget}.$$

In the exceptional case, where every economic offer had the same price, every PE (economic score) will be 100 points.

B2) With the N economic offers, it will calculate the average of PE (economic score) defined as BM, and the standard deviation.

Numbering every economic offer from 1 to n, defined i as integer from 1 to n, and defined as  $Of_i$ , economic offer  $Of_i$ . Also, P.L. is defined as solicitation budget.  $Of_i$  will be the percent respect P.L.

$$BO_i = \left[ 1 - \frac{Of_i}{P.L.} \right] \cdot 100$$

$$BM = \frac{\sum_{i=1}^n BO_i}{n}$$

$$= \left[ \frac{\sum_{i=1}^n (BO_i)^2 - n \cdot (BM)^2}{n} \right]^{1/2}$$

B3) With the values BM and SD (?), the next step is filtering the economic offer by the next formula:

$$|BO_j - BM|$$

Now, j is an integer, generic, from 1 to n' ( $0 < n' \leq n$ ).

$$BO_j = \left[ 1 - \frac{Of_j}{P.L.} \right] \cdot 100$$

Figure 3.4 Spanish best-value example for asphalt paving and maintenance bids.

## U.S. Parallel: Best-Value Procurement

Best-value procurement is becoming more prevalent in the United States. The NCHRP is sponsoring a project, NCHRP 10-61 Best-Value Procurement for Highway Construction, which will provide guidance for implementation in the United States. The study results are expected to be published in late 2004.

The State of Kentucky tested an alternate pavement design bidding system using warranties on its I-275 project. The alternate pavement designs were based on an equivalent 40-year design.

The Kentucky system can be classified as an "A+B-C" formula where:

- A = traditional bid for work;
- B = bid for cost of time to complete the project (includes road user costs); and
- C = bid for length of warranty (5-year minimum) based on road user costs.

Warranty	Additional Warranty Credit
Year 5 (minimum)	\$ 0
Year 6	\$ 500,00
Year 7	\$1,000,00
Year 8	\$1,500,00
Year 9	\$2,100,00
Year 10	\$2,900,00

An additional cost is added to the bid for schedule, creating an incentive for contractors to bid a shorter period of time. A warranty credit is subtracted from the bid for warranties of more than 5 years under the following formula:

In Kentucky's first application of the A+B-C system on the I-275 project, time and warranty length were not a factor in the final award, as seen in the following table, but the State received additional warranty years and a shorter construction schedule.

Contractor	A (Base Bid)	B (Calendar Days)	C (Warranty Years)
1	\$23.13 million	380	10
2	\$25.58 million	450	10
3	\$26.30 million	450	10


All of the contractors bid the maximum 10-year warranty period. This was advantageous for the State because it received a long warranty. Likewise, the schedule was not a factor in award because the contractor with the shortest schedule also provided the lowest bid. In addition to receiving the lowest bid, the State also received a shorter schedule and a longer warranty in this case.

throughout the process, but the bond would certainly cost the agency more than the reduced amount in the final 4 years. The Danish Road Directorate assumes it will find the major defects in the first year and it is willing to pay more for the bond. It does not wish to pay the increased bond costs in years 2 through 4 when defects may be less likely to occur.

The British Highways Agency takes a different view. It stated that its rigorous prequalification process and the existence of a small pool of relatively large

contractors negates the need for a bonding process. Ginny Clarke, the British Highways Agency's Chief Highway Engineer, stated that "this is a nice world where we look after everybody." The British Highways Agency relies on its prequalification process to hire only contractors that can and will correct any defects in their work. They do not incur the costs of bonds on their projects.

The philosophy of the British Highways Agency was echoed throughout the host countries. There is a

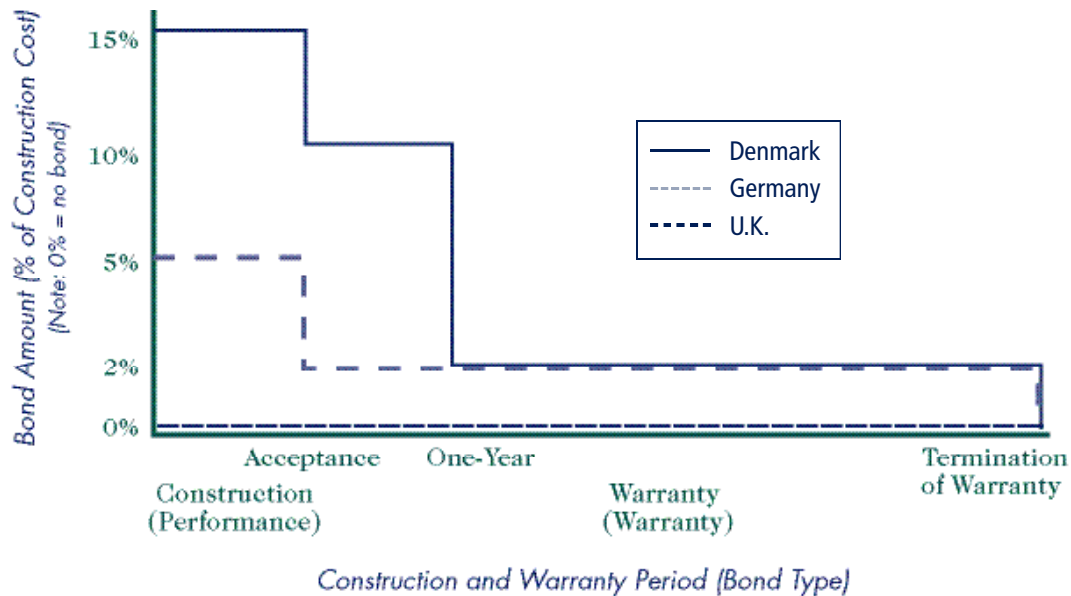

**Figure 3.5** Bonding requirements of host countries.

strong feeling from the highway agencies that contractors are making the right decision for the right end result. Moreover, the use of prequalification and/or best-value procurement creates long-term relationships with the contractors. The agencies work strategically with their industry to create a culture of partnership and continuous improvement. The contractors know that they must correct their defects if they wish to be considered for future work. If a warranty bond is called, it will be reflected in their future proposals for a number of years. Likewise, the highway agencies are best served if their contractors succeed and they work closely with them to ensure their success.

**Design and Construction Contract Award**

Design and construction contract award involves the allocation of responsibilities for design, material selection, and quality assurance/quality control (QA/QC). On projects involving material and workmanship warranties, the design and construction contract award process in the European host countries is similar to that of the United States. However, those projects employing short-term performance warranties require the contractor to perform more of the design. Also, the European host countries use more contractor material selection and QA/QC than found in the United States. A brief discussion of these responsibilities follows.

In all of the host countries, the agency designs the pavement structure. Where short-term,

performance-based warranties are being used (Denmark, Sweden, and U.K. design-build contracts) the contractor may select another design from the owner’s catalog and the owner must approve selection. The contractor may also select a noncatalog design, but it will be at his or her own risk. In all cases, the contractor performs mix design of bituminous mixtures and submits the job mix formula to the agency for review. The final mix design must be within the limits set by the agency.

With the exception of the Swedish National Road Association and the Danish Road Directorate, material selection is controlled by the agency. Germany, Spain, and the United Kingdom provide preapproved lists of material sources from which the contractor can choose. The use of alternative sources is encouraged, but they require approval from the agency. Sweden and Denmark differ slightly because some of the major contractors own the aggregate sources. These sources are monitored and approved by the agencies.

As stated throughout this report, there is more partnership between the European host countries and the industry than found in the United States. Accordingly the European host countries rely heavily on contractor quality control (CQC). The agency takes an audit role in the QA process. Of the host countries, standard German contracts are the most similar to those in the United States and involve three tests: a suitability test, a self-monitoring test (QC), and an owner

## U.S. Parallel: Bonds and Contractor Guarantees

The U.S. highway industry has been concerned with bonding since the inception of warranties. Bonds are required in all of the States using warranties, with the exception of Florida. Bond amounts are calculated in a number of different ways. The table below provides a sample of cases for setting bond amounts.

State	Bond Amount
Wisconsin	Estimated cost for a 1-½ overlay on the mainline pavement. <sup>1</sup>
Colorado	Estimated cost to mill and replace 2" to the nearest \$25,000. <sup>1,2</sup>
Michigan	New bituminous pavements – 10 percent of the total warranted bid amount. Bituminous overlays – 100 percent of the total warranted bid amount. <sup>2</sup>
Illinois	New bituminous pavements – 20 percent of mainline cost. Bituminous overlays – 50 percent of mainline surface and binder. <sup>1</sup>
Minnesota	New bituminous pavements – 30 percent of the total warranted bid amount. Bituminous overlays – 20 percent of the total warranted bid amount. <sup>1</sup>

<sup>1</sup> Pavement Warranty Symposium 2003.

<sup>2</sup> FHWA 2000.

As seen in the table above, bond amounts vary by State. Each of the highway agencies developed their bond amounts in conjunction with the contracting and surety industries in their respective States.

Florida has recently moved away from the use of bonds in lieu of what it has termed a "contractor guarantee." Given Florida's aggressive construction program and an expensive bonding market post 9/11/2001, Florida found the bonds to be too costly. Its contractor guarantee system works on the same principles used in the United Kingdom. In essence, the contractor guarantees that it will fix any defects or it will be removed from the prequalification list on future projects. The following excerpts are from the "Section 5-14: Contractor Guaranteed Project Features" of its design-build contract documents (Florida DOT 2003).

*"The Contractor shall assume responsibility for all the associated guaranteed work specified in this section for a minimum period of five (5) years ... including continued responsibility as to any deficiencies to which notice was provided to the Contractor within such guarantee period until all such pre-existing deficiencies are resolved ... Should the Contractor fail to ... satisfactorily perform any remedial work within the duration allowed by the Department ... the Department shall suspend, revoke or deny the Contractor's certificate of qualification under the terms of Section 337.16(d)(2), Florida Statutes, until the remedial work has been satisfactorily performed or full and complete payment for the remedial work made to the Department. In no case shall the period of suspension, revocation, or denial of the Contractor's certificate of qualification be less than six (6) months."*

At the time of this report, Florida was the only State using the contractor guarantee system for asphalt pavement warranties.

est (QA). The Danish system places more responsibility on the contractor. The contractor performs the QC and must submit the data to the agency during production and construction. No third-party control is required. However, most Danish contractors are certified in accordance with ISO 9000. The British highways Agency relies heavily on CQC for both standard and design-build contracts. A third party is

typically hired by the agency to monitor the contractor's processes, but little testing is done. The agency relies heavily on contractor quality management plans and incorporates their performance into the following procurements through prequalification and best-value selection. The Swedish system is similar to the Danish and U.K. systems in that the contractors do all of their own testing, and the agency inspects

and audits. Contractors or third parties do all tests. In fact, the Swedish National Road Agency does not have its own laboratories.

The Danish Road Directorate employs a unique use of warranties in relation to the QC system. If the QC limits are not met but the contractor believes that the product will perform as desired, the contractor can extend the warranty period in lieu of paying a penalty or correcting the work. This extended warranty places more risk on the contractor but it does give the Directorate confidence in the product. This system has great potential in the United States to create a better relationship between the industry and the public sector.

### Payment

Payment for work involves verifying work as complete and distributing payments. Retainage, incentives, and disincentives are common considerations in the final payments. The European host countries' philosophy on payment and retainage is closely related to their bonding philosophy described above. The host countries varied in their use of incentives and disincentives, as described below.

Since significant CQC is used, the European host countries make verification for payment in an audit fashion at the end of the project or in milestones. The German Federal Ministry of Transport uses visual inspection at the completion of construction according to the specifications. In standard Danish contracts, the contractor is paid after the work has been completed and accepted by the agency. On large projects the contractor may be paid on account. The Swedish system pays by unit volume, square meter, or ton, according to milestones. The British Highways Agency pays for work as completed. An inspector for the owner, who is typically a third-party consultant, is present on the projects.

Some countries equate their use of bonds to a retainage system. In Germany, for example, payment is made according to completion, with a 5 percent performance bond and a 2 percent warranty bond withheld depending on project size until the end of the 4-year warranty period. The Spanish system makes payment during construction, and then final payment at the end of the 1-year guarantee period. The Spanish system also delays payment during construction for the verification process. The Swedish system pays for all work except for *one-half* of the bond amount, which is released after completion of the

warranty period. The U.K. system is unique in that there is no retainage or bonding system. While there is a performance warranty, there are no retainage or bonding requirements. Again, the British system relies heavily on the prequalification and best-value procurement system to ensure the quality of the work. Retainage systems are not conducive to long-term partnering relationships.

There is little use of incentives in the European host countries. The Spanish, Danish, and U.K. philosophy is to place the responsibility for performance as described in the specifications on the contractor. If the pavement does not comply with specifications or quality is insufficient, the agency can withhold payment until corrective action has been taken. A negotiation process is used in questions of specification compliance, but the warranty is enforced. The German system is similar, but they reserve the right to assess penalties in addition to requiring corrective action. The Swedish system does utilize an incentive/penalty system at project completion and will sometimes use a similar system at the end of the guarantee period.

### Final Acceptance

In all host countries, a final acceptance of the project is made at the end of construction to signify the start of the warranty period. The formality of this final acceptance varies according to the level of QA applied by the host agency during construction. The German Federal Ministry of Transport uses perhaps the highest level of QA during construction and its final acceptance consists of a visual inspection done as a drive-through inspection after construction is complete. The British Highways Agency uses an on-the-job consultant throughout construction who verifies payment during construction and provides a final acceptance at the end of the project. The Danish warranty goes into effect at the end of construction independent of the owner's final acceptance. The Swedish system relies heavily on CQC during construction so the final acceptance is very rigorous. The Swedish National Road Association inspects all documents, including test protocols, verifications, and other contract demands. It then performs a visual inspection and a detailed road survey.

At the end of the warranty period, there is an official closeout function where the pavement is inspected and an assessment made as to whether the pavement has performed as expected. Much of this inspection relies on the individual country's

avement management system, which is discussed in chapter 4. In general, however, the level of inspection at the end of the warranty period is similar to that at the end of construction that was previously described. In Germany, there is a drive-through inspection. The agency presents a detailed “punch list” to the contractor. In the case of disputes, a joint inspection may be carried out. The German Federal Ministry of Transport is beginning to measure friction as an acceptance criterion. The Danish Road Directorate uses a third party to conduct a road survey and visual inspection, contract demands, and test protocols. The Swedish National Road Association only inspects the pavement at the end of the warranty period if it is required as determined through the pavement management system. If it is required, the agency, or third party, conducts a road survey and inspects all documents, including test protocols, verifications, and other contract demands.

### Conclusions

The use of asphalt pavement warranties is so entrenched in the European host countries’ culture that few of the hosts could explain the evolution of their programs. Warranties have simply been in use since before our hosts started working, and in some cases, before they were born. The warranty system has helped to establish a spirit of partnership and trust between the agencies and their industry. The contractors know that they are responsible for the quality of their work and that the chances of winning the next project directly relate to the quality of performance on their current project. Without best-value selection and project-based prequalification (short listing), the warranty programs would not be as effective.

The lengths of warranties vary. As a general rule, material and workmanship warranties are shorter (1 to 4 years) and performance warranties are longer (5 years). In all cases of performance warranties, the contractors have more responsibility for design and QC. The Danish system provides for varying lengths of warranties, depending on the particular assessment criterion.

All of the bidding processes evaluate more than just price. Examples of life cycle evaluation criteria are relevant. All countries employ project-based prequalification and/or best-value procurement and point to the procurement procedures as a critical element of program success. Nonprice factors being evaluated

can include past experience, performance rating, financial soundness, and quality of the company’s human resources procedures, to name only a few. Examples of nonprice factors holding more weight than price factors are not uncommon—particularly on longer-term contracts.

Bonding requirements and payment procedures are closely related and vary from country to country. Only the United Kingdom does not employ bonding or retainage. All of the other host countries employ varying levels of bonding and retainage. Some countries hold retainage until the end of the warranty period.

The European host countries more frequently allocate design, materials, and QC responsibilities than their American counterparts. While the agencies perform existing conditions assessment and pavement structure design in projects using material and workmanship warranties, they perform fewer activities in those projects with performance warranties. In all cases, contractors perform more QC activities than in the United States.

The European hosts strongly believe that contractors are making the right decision for the right end result. Moreover, the use of prequalification and/or best-value procurement creates long-term relationships with the contractors. The agencies work strategically with their industry to create a culture of partnership and continuous improvement. The contractors know that they must correct their defects if they wish to be considered for future work.



# Warranty Evaluation

**W**arranty evaluation occurs during the warranty period of the contract. Critical items that need to be evaluated during the warranty period include allocations of responsibilities for operation and maintenance, criteria and thresholds for performance evaluation, and triggers for corrective action under the terms of the warranty. More globally, agencies must continuously evaluate and improve their warranty programs. This chapter reports on the warranty evaluation process in the European host countries. Although this chapter focuses on material and workmanship and short-term performance warranties, many of the performance evaluation criteria and evaluation techniques are similar to those used in the long-term performance warranties and maintenance contracts described in chapter 5.

## Responsibilities for Operation and Maintenance

Historically, warranties have not been allowed in the United States, in part because they can be considered “maintenance,” and federal funds could not be used for maintenance as discussed in chapter 1. Since the 1990s, however, U.S. warranty evaluation programs have been allowed to include

maintenance in warranty contracts. Table 4.1 provides maintenance definitions for discussion. The definitions have been adapted from NCHRP 451—Guidelines for Warranty, Multi-Parameter, and Best-Value Contracting.

The European host countries all consider preventive maintenance part of the contractor’s responsibilities under both material and workmanship warranties and short-term performance warranties. In standard contracts, the warranty contractors are responsible for any maintenance correlating to the correction of defects stemming from material and workmanship related issues or poor performance under normal conditions. A number of important issues must be considered during operation and maintenance of the warranty period, including determination of traffic loads and climatic conditions and emergency repairs.

Unexpected traffic loads or differing climatic conditions are not a major concern in any of the host countries. The German Federal Ministry of Transport makes no adjustments during the 4-year warranty period. It factors its extensive historical climatic and traffic data into the design process. Traffic loads are

Type of Maintenance	Definition
Routine	Such items as signage removal and repair, snow removal, salting/sanding, mowing, and guardrail improvement or repairs
Preventive	Smaller, less serious forms of corrective action performed to prevent a distress from reaching threshold level
Corrective	Repair or replacement of deficient areas, as defined in warranty specifications
Emergency	Any distress or product failure that presents an immediate safety hazard to the traveling public

**Table 4.1** Maintenance definitions under warranty specifications.

## *U.S. Parallel: Preventive and Routine Maintenance*

Responsibilities for preventive and routine maintenance are unique to each State, but generally the States are responsible for the routine maintenance, and the contractor has an option to perform preventive maintenance. The following are responses to a survey from a warranty symposium asking the question how routine and preventive maintenance are handled during the warranty period of the contract (Pavement Warranty Symposium 2003).

**Florida DOT** Routine maintenance is not included; however, the Contractor has maintenance responsibility for the work associated with the Contract for the full warranty period. Remedial work must be performed to Department standards.

**Indiana DOT** The DOT is responsible for snow plowing, letter removal, etc. Pothole patching, etc. is the contractor's responsibility and must be corrected in accordance with the specifications.

**Illinois DOT** Routine maintenance (snow removal, pavement marking, mowing, etc.) by IDOT is allowed during warranty period, and does not relieve contractor from meeting the warranty requirements. Preventive maintenance by contractor is allowed, with prior approval by IDOT. Examples would be joint and crack sealing and bump grinding.

**Wisconsin DOT** The contractor is required to seal all cracks at the end of the 3rd year. However, the contractor can do other corrective action if they feel that it would be beneficial to them. This has to be coordinated through the associated Transportation District.

Additionally, a recent survey for the Texas DOT found that Minnesota, Michigan, and Washington perform preventive maintenance under the States' DOT responsibilities during the warranty period.

*Source: Stewart Anderson, Presentation to the Texas DOT, March 5, 2003.*

rejected for the life of the pavement and not adjusted for in the warranty period. The Danish and Swedish philosophies are less stringent and include a negotiation phase with the warranty contractor if the counts are outside of the limits set on traffic and loads. The same negotiation philosophy is used if climatic conditions vary. In all host countries, Acts of God are a responsibility of the owner.

Emergency maintenance or repairs are typically performed by the warranty contractor in order to minimize coordination of future warranties on the repair work, but the emergency repairs may be contracted to a separate entity depending on the country and the specifics of the contract. Costs for maintenance stemming from an accident are charged to the owner of the vehicle causing the accident. Charging the owner or his/her insurance company is common practice throughout the European host countries.

### **Performance Indicators and Thresholds**

Clear and equitable performance indicators and thresholds are a primary key to success in European

and U.S. warranty systems. The European host countries rely on their pavement management systems (PMS) to measure the warranted project and use the historic PMS data to determine the thresholds. Therefore, the indicators used to measure warranty project performance are the same indicators that are collected on pavements regularly throughout the country. The majority of indicators are consistent from country to country, with some exceptions because of the particular measurement instruments employed and the types of deterioration problems commonly encountered within each country. The thresholds are somewhat less consistent from country to country. They vary primarily depending on the climatic conditions, the materials available in each country, and the types of deterioration commonly encountered within each country. For example, Sweden does not measure friction on the majority of its roads because the use of studded snow tires maintains a high coefficient of friction on the asphalt. However, rutting is a common problem because of these same studded tires.

	Spain	Germany	Denmark	Sweden	U.K.
Deterioration (longitudinal, transverse and alligator cracking, and potholes)	X	X	X	X	X
Durability (raveling, joints)	X	X	X	X	X
Friction	X	X	X		X
International Roughness Index (IRI)	X		X	X	
Longitudinal evenness			X		X
Transverse profile and drainage of surface water			X		X
Rutting			X	X	X
Instability/structural	X		X		
Crossfall			X	X	
Texture					X

**Table 4.2** Performance indicators.

Table 4.2 summarizes the performance indicators specifically mentioned by the European host countries. The research team attempted to collect data for both the types of performance indicators and their corresponding thresholds from each of the host countries. However, complete data collection was not possible given the short time of the research, the language barriers, and the varying nature of indicators and thresholds within the countries.

As seen in table 4.1, all of the host countries use durability and deterioration as performance measures. The definitions of these two measures vary slightly, but all note a visual inspection for conditions of longitudinal cracking, transverse cracking, and/or alligator cracking, potholes, raveling, and joint separation. With the exception of Sweden as previously noted, all of the host countries use friction as a performance indicator. Since the German Ministry of Transport uses prescriptive designs with materials and workmanship warranties, it does believe that it needs to use other performance indicators. Denmark, Sweden, and the United Kingdom are using short-term performance warranties and allow more innovation in the final design, and therefore employ additional indicators that correlate to design performance. IRI, rutting, and texture are all measures that incorporate design performance with material and workmanship performance. Denmark and Sweden

use the greatest number of performance indicators in their systems. As these owners move toward longer warranty periods, they are using a greater number of performance indicators and measuring more frequently, as discussed in chapter 5.

**Performance Measurements**

All of the European host countries rely almost exclusively on their PMS to evaluate the performance of warranted products. For example, the U.K. PMS involves annual inspections, and the Spanish PMS includes surface inspections every 6 months with bearing capacity inspections annually. The German Federal Ministry of Transport also uses a local visual inspection on a weekly basis for normal roads, thrice weekly for Auto Bahns. Regarding specific performance measurements for warranties, all of the countries conduct at least a visual inspection at the end of the construction period. The German Federal Ministry of Transport uses an additional visual inspection at the end of the warranty period. The Danish Road Directorate typically performs an initial inspection at the end of construction, a 1-year inspection, and a 5-year inspection. The Danish Road Directorate also reserves the right to perform inspections whenever necessary.

The European host countries use a similar array of reference guides and equipment as

## U.S. Parallel: Performance Indicators

The United States uses many of the same performance indicators found in Europe. The variation of performance indicator is a function of the types of deterioration problems commonly encountered, the particular measurement instruments employed, and the evolution of the warranty program within each State. The table below is a summary of performance indicators reported by the FHWA in 2000 (FHWA 2000).

	AL	CA	CO	FL	IN	ME	MI	MO	OH	WI	Total
Alligator Cracking	X	X	X	X		X	X			X	7
Bleeding/Flushing	X	X				X	X		X	X	7
Block Cracking	X	X				X	X			X	6
Delamination									X		2
Disintegrated Areas	X		X	X		X	X			X	6
Edge Cracking	X	X	X	X						X	5
Edge Raveling										X	1
Longitudinal Cracking	X	X	X	X	X			X	X	X	8
Longitudinal Distortion	X									X	2
Patching						X	X		X	X	4
Potholes	X		X	X		X	X	X			6
Ride Quality	X		X	X	X		X				5
Rutting	X	X	X	X	X	X	X	X	X	X	10
Scabbing	X										1
Shoving/Slippage Areas	X		X	X		X					4
Skid Resistance	X				X						2
Spalling								X			1
Surface Raveling	X	X	X					X	X	X	6
Transverse Cracking	X	X	X	X	X	X	X	X		X	9
	15	8	13	9	5	9	9	6	6	12	

In general, the U.S. highway agencies use more performance indicators than do the European host countries. Alabama, Colorado, and Wisconsin all use more than 10 performance indicators to measure warranty performance. Indiana, Missouri, and Ohio use six or less. These indicators can change on a project-by-project basis and may evolve into composite indices as the State warranty programs continue to develop.

Performance Indicator	Measurements
<b>Deterioration (longitudinal, transverse and alligator cracking, and potholes)</b>	<ul style="list-style-type: none"> <li>• Visual distress surveys</li> <li>• Photo-logging</li> </ul>
<b>Durability (raveling, joints)</b>	<ul style="list-style-type: none"> <li>• Visual distress surveys</li> <li>• Photo-logging</li> </ul>
<b>Friction</b>	<ul style="list-style-type: none"> <li>• Sideways force coefficient routine investigation machine (SCRIM) Pendulum</li> <li>• Photo-logging</li> </ul>
<b>International Roughness Index (IRI)</b>	<ul style="list-style-type: none"> <li>• Noncontact laser profilometers</li> </ul>
<b>Longitudinal evenness</b>	<ul style="list-style-type: none"> <li>• Noncontact laser profilometers</li> </ul>
<b>Transverse profile and drainage of surface water</b>	<ul style="list-style-type: none"> <li>• Noncontact laser profilometers</li> <li>• Visual observations</li> </ul>
<b>Rutting</b>	<ul style="list-style-type: none"> <li>• High-speed monitoring vehicle with rut bar</li> <li>• Noncontact laser profilometers</li> </ul>
<b>Instability/ structural</b>	<ul style="list-style-type: none"> <li>• Falling weight deflectometer (FWD)</li> </ul>
<b>Crossfall</b>	<ul style="list-style-type: none"> <li>• High-speed monitoring vehicle</li> </ul>
<b>Texture (stone loss)</b>	<ul style="list-style-type: none"> <li>• Visual distress surveys</li> <li>• Photo-logging</li> </ul>

**Table 4.3** European host countries’ measurement guides and equipment.

found in the United States, which is displayed in table 4.3.

The host countries employ varying lengths of inspection. Table 4.4 describes the varying lengths of inspection for a selected number of inspections. The length of pavement evaluation varied somewhat from project to project, but table 4.4 describes the length that the host countries most commonly use.

**Corrective Action**

There may be instances when corrective actions are required under terms of the warranty. For example, the German Federal Ministry of Transport noted that 1 percent to 2 percent of the projects require significant corrective action that invokes the warranty and about 25 percent of the projects require some preventive maintenance, but the work is minor. The owner must then consider the communication of the corrective action to the contractor, the consequences of noncompliance, the conditions that might void the warranty, owner participation in corrective action, and dispute resolution.

The communication of defective items varies slightly from country to country. In Germany, the Ministry of Transport deals with only the prime contractor. The Spanish Road Association uses separate maintenance contractors during the warranty period. These maintenance contractors must repair defects and seek recovery from the warranty contractor. In this manner, the Spanish government is shielded from defects covered under the warranty. The Danish Road Directorate suggests the corrective action in accordance with traditional measures. In some cases, the actual measures will be subject to negotiation, but the agency has a strong position. The British Highways Agency relies on the county representative to initiate the action, but there does not appear to be a fixed procedure.

All countries have stringent penalties for noncompliance with required corrective actions. As previously noted, all countries have the ability to consider the failure to correct defective items in future procurements through project-based prequalification and/or best-value selection. All of the host countries point to this procurement latitude as a primary factor in the success of their programs. Spain, Germany, and the United Kingdom reserve the right to completely debar the contractors from bidding on future work. The German Federal Ministry of Transport requires both construction and

Country	Length of Measurements (meters)
Spain	1000
Germany	100
Denmark	100
United Kingdom	100
Sweden	20

**Table 4.4** Length of pavement evaluation sections.

warranty period bonds. The German Federal Ministry of Transport will call either bond if necessary and can invoke penalties or withhold payments during construction. These actions do not affect the warranty performance requirements. The Danish consequences vary with the nature of the noncompliance. As a general rule, the cost of the measures reasonably relates to the actual importance of the noncompliance issue. During construction, they typically use levels of (1) warning, (2) extended warranty period, (3) remedy action or deduction in payment, and (4) rejection of product. During operations, they rely on the warranty bond and the implications on future performance. The United Kingdom relies solely on future qualification for additional contract work and does not use bonds, as discussed in chapter 3.

Conditions to void warranties are rare and are negotiated in Europe when they are encountered. Acts of God and accidents are the only cases that were noted as a cause for voiding a warranty in all of the European host countries. Before a warranty becomes completely void, the European hosts are likely to participate in the corrective action as described below. There is a much greater sense of community, shared responsibility, and negotiation than what is found in the U.S. industry.

Owner participation in corrective action varies with the European host countries. The Spanish Road Association and the British Highways Agency typically only participate if the repairs are forced by Acts of God. The Swedish National Road Association will participate if “non-normal” conditions arise. The German Federal Ministry of Transport participates if the repairs are caused by Acts of God or if the owner caused the problem through (1) defective specifica-

tion, (2) errant special instructions, (3) defective owner-provided materials, or (4) the problems are caused by a previous contractor.

The Danish philosophy for participation in corrective action is unique. In effect, they prorate the repairs on the pavement. If a pavement failure occurs within the 5-year warranty period, they give the contractor credit for the useful life they have already received. However, all repairs have a new 5-year warranty. Also, if it can be justified that the traffic load is higher than the designed technical solution, both parties are supposed to be responsible for the failure to some degree. The contractor is assumed to have some foresight in the problem given the expertise upon which it was selected. The remedial action and related cost are settled by negotiations. The Danish tradition is that the owner and the contractor can split the difference if it was shared responsibility. An example was provided where the contractor paid 7/11th of the costs and the owner paid the other 4/11th for the cost of the remedial action.

Negotiation is the most common mechanism to resolve disputes. There seems to be a long tradition of resolving disputes without taking legal action. However, the agencies are in a strong negotiating position because of the implications to the contractor for future work. The Swedish and Danish rely almost exclusively on negotiations. The German system provides for arbitration. The U.K. system provides for adjudication (use of outside experts, panels, etc.), and ultimately legal action, but this is rarely invoked.

### Program Performance Evaluation and Industry Input

The U.S. research team was interested in how the European host countries evaluate and continuously improve their warranty programs. The hosts were asked to provide comparisons for performance of asphalt warranted pavements to that of nonwarranted pavements. However, none of the hosts had such data available since all of their projects have warranties and their warranty programs have been in existence for so long that they do not have data for comparison. It turns out that the host countries rely on their private sector partners to indirectly measure the program performance and assist in continuous improvement.

As discussed throughout this report, there is a great sense of partnership and collaboration among the European highway agencies and the private sector.



## *U.S. Parallel: Program Performance Evaluation*

The U.S. highways agencies have been evaluating the performance of their warranty projects through the use of pilot projects. While much of this has been done informally, Colorado and Wisconsin have published two excellent reports on their program evaluation. Both of these reports are available on the DOT's research websites.

**Aschenbrener, T., and DeDios, R. (2001).** "Materials and Workmanship Warranties for Hot Bituminous Pavement: A Cost-Benefit Evaluation." Report No. 2001-18, Colorado Department of Transportation, Denver, Colorado.

**Krebs, S. (2001).** "Asphalt Pavement Warranties – Five-Year Progress Report." Wisconsin State Department of Transportation, Madison, Wisconsin.

The reports offer an interesting contrast. Wisconsin has found a significant cost-benefit savings, while Colorado's experience was not as positive. These findings relate to warranty and project selection processes developed in each State. When viewed together, the reports offer an excellent database of lessons learned.

There is also a culture of continuous improvement that has been fostered by the move toward International Organization of Standardization (ISO) quality systems. Each host country provides opportunities for industry input into the warranty programs, and the agencies use this input to improve their practices. In Spain, there is opportunity for the industry to negotiate with the Spanish Road Association on different aspects of large contracts after they are first advertised and before bids are accepted. The German Federal Ministry of Transport uses a board composed of the agency, industry, and academia to establish test procedures and standards. It operates in a similar fashion to the TRB except that in addition to research, the group also develops and maintains specifications. The Danish Road Directorate uses a standards board composed of agency, industry, and consultants, and addresses issues annually. Similarly, the Swedish National Road Association employs agency, industry, and consultant input, but in a less formal manner. In the United Kingdom, the contractors can comment or propose changes annually. There is a working group composed of consultants, contractors, and the agency. All of these methods provide valuable input into continuous improvement of the host countries' warranty programs.

### **Innovation in Products and Processes**

Contractor innovation is difficult to achieve in standard material and workmanship warranties and in short-term performance warranties. The German system of material and workmanship warranties allows

for virtually no flexibility or opportunity for innovation. Standard Danish warranty contracts specify materials and pavement thickness, leaving little incentive for innovation. Even in the Danish example of offering extended service life for a lower average annual cost provided in chapter 3, the contractors must propose preapproved pavement designs. These designs must also go through a rigorous approval process with the Danish Road Directorate. The contracting environment in Spain does not allow the contractor flexibility to innovate at will. If a contractor identifies an innovative material or technology, the idea is submitted to the Spanish Road Association for approval.

The Swedish system provides for a little more innovation. The agency designs a cross-section and recommends mixtures to be used. At the time of bidding, the contractor can propose an alternate cross-section and alternate mixtures. For a completely unknown approach, the agency may ask for an extended warranty of 1 or 2 years. The U.K. short-term performance warranty system using design-build contracts perhaps allows for the most innovation, but there is still little incentive for the design-builder to take such risks. In U.K. design-build contracts, the contractor is required to use standard specifications for the design and construction. The contractor can propose an alternate solution but the British Highways Agency is cautious about accepting any unproven material. The contractor must apply to the Highways Agency for a deviation. The Highways Agency reviews the proposal and data provided and then agrees or disallows the proposed

eviation. The typical evaluation of deviations takes to 6 months.

All of the material and workmanship warranties and short-term performance warranty programs provide little incentive for innovation, and therefore all of the countries are experimenting with alternative contracting methods to increase program performance. Chapter 5 describes alternative contracting methods, particularly PPCs and long-term performance warranties, in detail.

### Conclusions

Transparent warranty evaluation processes are a key to any warranty program's success. The longevity of the European host countries' warranty programs has allowed for a large amount of industry input over the years. As discussed throughout this report, there is a great sense of partnership and collaboration among the European highway agencies and the private sector. This partnership is evident in the entire warranty evaluation process from the allocation of responsibilities for maintenance to the resolution of disputes.

All of the European host countries allocate preventive maintenance to the contractors. Standard warranty contracts do not allocate routine maintenance to the contractor, but this is done in alternative contracting methods as discussed in chapter 5. Unexpected traffic loads or climatic conditions are not a major concern of the highway agencies, but they will negotiate warranty terms in cases of extreme conditions. The warranty contractor typically performs emergency maintenance required during the warranty period.

The European host countries determine the performance indicators and thresholds from historical data in their PMS. The PMS is employed to measure performance indicators in each of the host countries. Since monitoring occurs on all of the warranted pavements in conjunction with the entire network, there is little additional effort required to implement the warranty evaluation. Deterioration, durability, friction, IRI, profile, and rutting are among the most common performance indicators. The thresholds vary from country to country and project to project, but they are all consistent with historic expectations from their PMS. Common measurement tools include visual distress surveys, photo-logging, SCRIM, high-speed monitoring vehicles with rut bars, and noncontact laser profilometers.

Requirements for corrective actions are typically done through the prime contractor and may employ a negotiation phase. All countries had stringent penalties for noncompliance with required corrective actions. They all note the failure to correct defective items in future procurements through project-based prequalification and/or best-value selection, and they consider this to be a primary element for warranty program success. Owners may participate in costs for corrective action if the defect is not the fault of the contractor; however, there are few instances that would justify owner participation. The agencies are in a very strong negotiating position in these instances. There is a long tradition of resolving disputes without taking legal action, but arbitration or adjudication can be used if negotiations are unsuccessful.

Innovation stemming from the standard warranty programs is not widespread in standard warranty contracts. At a minimum, the agencies design a cross-section and recommend a mixture. Contractors can suggest alternatives, but these alternatives must be approved by the agencies, and they may request extended warranties on unusual requests. To enhance innovation, the agencies are turning to alternative delivery methods, as described in chapter 5.

# Alternative Delivery Methods

## Introduction

Chapters 3 and 4 of this report describe both material and workmanship and short-term (5 years or less) performance warranties in Europe. The long history of success with these short-term performance solutions has recently evolved toward longer-term guarantees of performance through the use of maintenance contracts, PPCs, and DBFO contracts. Similarly to the United States, the European hosts are dealing with growing capital project needs, as well as backlogged maintenance needs. They are also dealing with a shortage of staff and a changing role of government. All of the host countries are looking at alternative delivery methods as a mechanism to increase innovation without creating a burden on highway agency staff. While these long-term performance contracts were not the focus of the scan, all of the host countries viewed them as a natural evolution of their warranty program and spent a significant amount of time presenting them to the scan team during the visit.

The alternative delivery methods use many of the same mechanisms discussed in the short-term warranties. For example, the previous discussions of existing conditions definitions, final acceptance, perform-

ance indicators and thresholds, performance measurements, and corrective action are all very similar in the long-term performance warranties. The primary differences involve the products warranted, the lengths of warranties, procurement methods, bonding requirements or financial guarantees, design and construction contract award, payment, and responsibilities for operation and maintenance.

This chapter presents three categories of long-term performance warranties: maintenance contracts, PPCs, and DBFO contracts (see figure 5.1). The discussion focuses on those items that are significantly different from short-term warranties. All of the long-term performance contracts include both a warranty and maintenance activities. The first group only includes maintenance and is generally shorter in term (5 years). The pavement performance warranties include the maintenance necessary to warrant the project for approximately the design life of the pavement. The DBFO contracts include maintenance over the life of the project, and the term can span over multiple pavement rehabilitations.

The reader should be aware that these alternative delivery methods are a relatively new mechanism in



Figure 5.1 Warranty evolution continuum.

urope. As noted in chapter 2, significant use of long-term performance warranties has only been in effect since the 1990s in the majority of host countries, and they are still widely considered to be an alternative form of contracting in these countries. There is not yet the documented success and core knowledge gained with the short-term warranties. However, the European host countries are placing a lot of faith in these contracts to deliver performance by tying the contractor into the full life cycle of the product.

### Maintenance Contracts

The majority of short-term warranties does not include routine and preventive maintenance in the contract, but rather include corrective maintenance through the performance measurement terms of the contract. Spain and the United Kingdom provided the main team with examples of maintenance contracts that place the responsibility for routine and preventive maintenance on the contractor. In addition to maintaining pavement at a predescribed level of performance, these maintenance contracts also include items such as smaller, less serious forms of corrective action performed to prevent a distress from reaching threshold levels, signage removal and repair, snow removal, salting/sanding, mowing, and guardrail improvement or repairs.

These maintenance contracts are not necessarily tied to the original construction contract, but they are still a natural evolution of warranties as they move from short-term to long-term performance warranties. Where material and workmanship and short-term performance warranties need only examine the pavement performance after 1 to 5 years as a prediction of future performance, they do not typically warrant pavements into the preventive maintenance cycle. However, long-term performance warranties continuously examine the pavement performance well into this preventive maintenance cycle, and it follows that the contractor will perform that maintenance so that there is a clear delineation of responsibility. The contractor may also want to control the routine maintenance to ensure that drainage and other critical elements of the roadway performance are met.

Spain provided an excellent maintenance contract case study for the research team. In the 1980s the first Spanish national highways were constructed, and the maintenance of the highways was contracted externally through bids. Prior to that time the Spanish government was in charge of the maintenance. In 1987, the Spanish government awarded the first contract

for the maintenance of the M30 loop around Madrid. As of September 2002, there were more than 120 contracts to manage over 3000 km of highways in the national region. Fifty-sixty companies managed these contracts, and the government still managed about 20 percent of the system. The municipalities have similar contracts for cities and urban areas.

The Spanish maintenance contracts were originally awarded on a 4-year term, but the term has recently been switched to a 2-year award with two 1-year options. The contracts are typically for 100 km of highway, but they are often shorter for rural roads. The maintenance contracts are divided into three groups:

- **Group 1** keeps the roads open from incidents, snow, obstacles, etc. A full team has crews that work 24 hours a day/365 days a year with a lead engineer. They must patrol the road at least three times a day. The team takes care of normal repairs during regular business hours, but has full-time shifts that take care of incidents 24 hours a day. The contractors receive a fixed fee monthly and work on a cost-reimbursable basis for the materials they install. The staffing is clearly specified in the contract.
- **Group 2** takes care of routine maintenance such as cutting grass, painting pavement markings, replacing signs, and small paving projects, etc. They are paid on a unit-cost basis rather than a lump-sum basis.
- **Group 3** takes care of unexpected events such as flooding and works under a top set amount for the contract period. If their services are not needed, the money reverts to Group 2. This group will repair the road in cases of a tanker accident, a damaged bridge, etc.

The cost breakout for the entire network is approximately 30 percent to 40 percent for Group 1, 50 percent to 60 percent for Group 2, and 10 percent to 20 percent for Group 3. The Ministry of Transport maintains the system-wide pavement management database. Group 1 collects the data (using a subcontractor with the laboratory), but the Ministry makes the decisions when to repair the road. These data are made available to the maintenance contractor, but are maintained by the Ministry. If maintenance is required on a systemwide basis, the project is let as a large bid. If the work is less than 1 or 2 km, the maintenance contractor may do it. Typical perform-

### U.S. Parallel: Asset Management Contracts

The Virginia DOT embarked on a 5½ year, fixed-price maintenance agreement for more than 1,000 lane miles on I-77, I-81, I-95, and I-381. The work includes all required restorative work, such as roadway resurfacing and bridge deck replacement (Garza and Voster, 2000).

ance indices include IRI, deflection, cracking indices, wearing, and friction.

The United Kingdom uses managing agent contracts (MAC) for term maintenance of its motorway and trunk road system. The United Kingdom started with 3-year maintenance contracts for a limited scope of work. Currently, the term is 5+1+1 (5 years as a base plus two 1-year options) if the provider, the contractor, is achieving the performance indicators successfully. The scope of work has also expanded from the initial concept. Emphasis is being placed on integrated supply chain management. The selection process includes evaluation of the plan to provide goods/services, also risk allocation within the contractor team. Maintenance includes routine matters and limited reconstruction work—if reconstruction costs are above a specified level, the job is separately procured.

As previously stated, these maintenance contracts are somewhat outside the scope of this warranty scan, but they are a natural evolution of warranties as they move from short-term performance to long-term performance. As contractors move into the longer-term pavement performance warranties described in the next two sections, they may need to acquire these maintenance competencies in order to deliver the scope of services being required by the government.

#### Pavement Performance Contracts

Various forms of PPCs were observed in all countries on the tour. Denmark had awarded close to 20 contracts at the time of this scan. Sweden was using PPCs for about 10 percent of its pavements at the time of this scan and is hoping to double the number by 2007. The exact number of Danish PPCs and the type of surfacing is shown in figures 5.2 and 5.3. Germany refers to these contracts as “functional contracts,” and they had awarded only two at the time of the scan. The United Kingdom uses a form of PPC though its “framework contract.” The term PPC will be used to describe all of these contracts for clarity in this report.

PPCs extend performance warranties to include a warranty period that is closer to the design life of the pavement. In a PPC, the contractor is responsible for designing, constructing, and maintaining the performance of the pavement to prespecified levels. The advantages to the owner are readily apparent. Table 5.1 offers a comparison of the lengths of warranties on standard Danish contracts and PPCs. As displayed, the owner is assured of performance over a period of 11 to 16 years in the PPCs, rather than just 1 to 5 years as seen in traditional contracts. Additionally, impenetrability of surface water and load-bearing

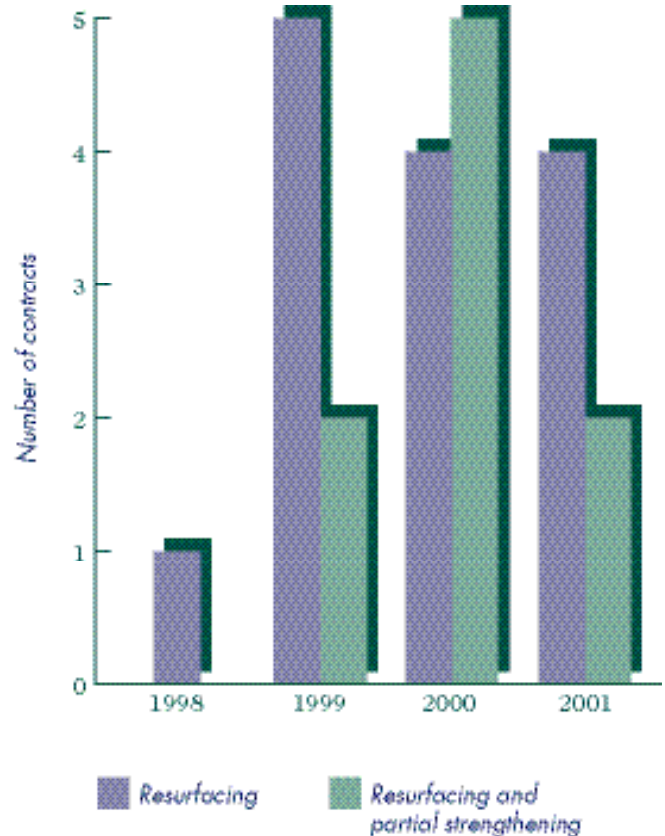


Figure 5.2 Danish pavement performance contracts (number of contracts).




capacity are warranted in the PPCs, but not in the standard contracts.

In Spain, Germany, and the United Kingdom, the highway agencies are promoting the contracts. However, the industry is the catalyst for PPCs in Denmark and Sweden. In all of the countries, the PPC forms are developing with close government and industry collaboration.

Depending on how the contractor proposes to build the pavement, the maintenance can include a number of items from filling of isolated potholes and minor pavement remarking to a complete mill and overlay of a significant section of pavement. The highway agencies are simply looking to the industry to provide a pavement that performs to prespecified standards. The PPCs allow for much more innovation from the industry. However, there is a substantial risk that the industry must be willing to take. The contractors must have design, construction, and maintenance competencies to compete for a PPC.

The advantages of PPC include that the contract is directly related to pavement performance; there is greater involvement of the contractors and contractor innovation in the process; agency demands on design oversight, supervision, and quality control are minimized; and there is an improved control of contract economy and reduced risk of exceeding the budget for the owner. Likewise, the contractor can

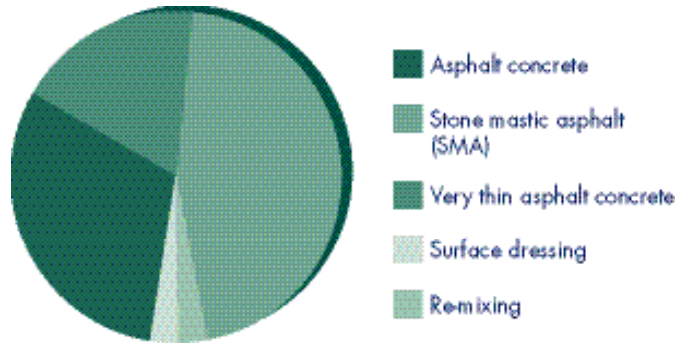

**Figure 5.3** Danish pavement performance contracts (type of surfacing).

plan its work in a long-term fashion rather than a reactive fashion upon successful award of short-term contracts. The disadvantages stem from dedicating money for a potential large network to one contractor for a long period, increased liability for the contractors, and changing environmental, political, and societal issues that are difficult to tie into long-term contracts. Unfortunately, these advantages and disadvantages are speculative given that PPCs are relatively untested by the industry.

**Length of Contracts**

The lengths of PPCs varied. The length of the contract is loosely tied to design life of the pavement, but type of pavement, existing road conditions, and

Performance Indicator	Standard Contracts	Performance Contracts
Friction	5 years	Throughout contract
Surface regularity	1 year	Throughout contract
Profile and drainage of surface water	1 year	Throughout contract
Rutting	5 years	Throughout contract
Instability	5 years	Throughout contract
Durability (raveling, joints, cracking, potholes)	5 years	Throughout contract
Impermeability of surface layers	None	Throughout contract
Load-bearing capacity	None	Throughout contract
Road marking (friction, reflection, color)	3 years	Throughout contract

**Table 5.1** Length of warranty and pavement performance contracts in Denmark.


	Germany	Denmark	Sweden
Number of contracts through 2002	2	17	23
Length of contracts (years)	20	11-16	5-12

\* Germany stated that it would increase the length of the contracts to 25 years in its next set of pilot projects.

**Table 5.2** Length and number of PPC contracts.

financing approach all play a role in the length of PPCs. Table 5.2 summarizes the various lengths of PPCs in host countries where the information was available, and figure 5.4 provides the lengths for Denmark’s initial PPCs.

In Germany’s first PPC, the Federal Ministry of Transport allowed for alternate bids between concrete and asphalt. It chose a period of 20 years and based the award on a life cycle cost evaluation. Concrete was selected as the most economical material for a period of 20 years. Our hosts stated that the next set of contracts would be let with a

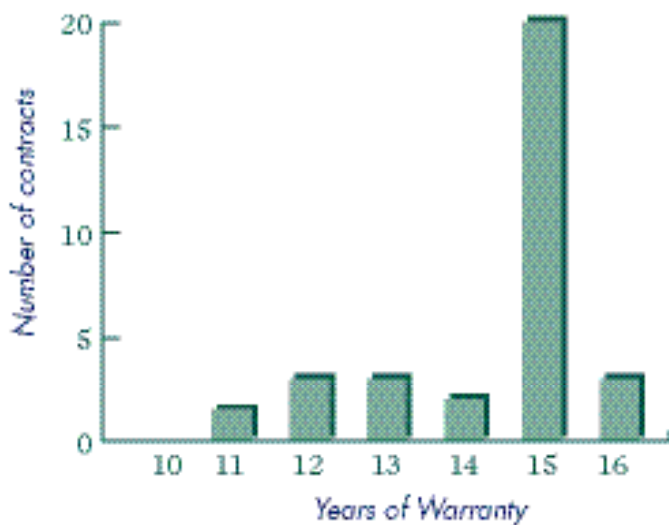

**Figure 5.4** Danish pavement performance contracts (warranty periods).

period of 25 years and that they expected that asphalt would be the more economical choice given the expense to repair concrete joints after a 20-year period.

Denmark and Sweden have begun to more aggressively employ PPCs. In Denmark, the municipalities are the sole users of the contracts and they are choosing 11- to 16-year contract lengths. Their motivation for these lengths seems to be tied to the cash flow and financing aspects of the contracts, which is explained in more detail in the following pages of this report. Swedish PPCs currently vary in length between 5 and 12 years. The main motivation for the use of these contracts in Sweden is the outsourcing of administration to the private sector. The length is tied to the current risk appetite of the industry, and the future may see longer contracts.

The length of contract will also have a large bearing on the procurement, bonding requirements, and financing/payments of the PPC. These issues are discussed in detail in the following sections.

**Procurement**

The best-value process, as described in chapter 3, is the procurement method of choice for PPCs. A key aspect of the best-value procedure is the application of engineering economy to the procurement—particularly equivalent annual value (please refer to figure 3.2). PPCs extend the best-value example presented in figure 3.2 because the contracts can involve a number of planned construction and maintenance cycles throughout the life of the project. The Danish Road Directorate provided the scan team with an example plan of activities and payments, which is shown in table 5.3.<sup>2</sup>

Different contractors may have alternative construction activity strategies. For example, one contractor may choose to conduct major construction in the first year to minimize the maintenance costs throughout the life of the project, while a second contractor may choose to keep the existing pavement performing at acceptable levels through minimal repairs and defer the major construction until later in the contract. As seen in figure 5.5, the contractor chose to delay milling and strengthening until year three of the contract. This will delay its major investment, but it will need to conduct any necessary pavement repair in

<sup>2</sup> Simonsen, P., and Thau, M. (2002). “Pavement Performance Contracts: The Alternative Contractual Relationship,” *Roads, PIARC, World Road Association*, No. 315, pp. 45-56. This example was subsequently published in the journal *Roads*. Examples from this article are used for reference throughout the remainder of this section.

### U.S. Parallel: Pavement Performance Contracts

The following is a quote from "Performance-Based Contracting for the Highway Construction Industry" by Carpenter, Fekpe, and Gopalakrishna, 2003.

Koch Performance Roads, Inc. is providing performance-based warranties on roads in O'Fallon, Missouri, and Aspen, Colorado. The Aspen project involved rehabilitating 30 percent of Aspen's city streets. The work in O'Fallon consisted of constructing streets in Winghaven Research Park. Both projects used a design-build-warranty approach to finish in a timely manner. The pavement used is warranted against cracking potholes, rutting, and ravelling for 15 years.

ears one and two to maintain the pavement at the level of performance specified in the contract. The average annual value for each of the strategies can be determined and used in the best-value procurement described in figure 3.2.

While this procurement process has been successful in a number of projects in the host countries, the team noted that it could be quite sensitive to both the period of analysis and the discount rate specified by the owner. The formulas used to calculate average annual value are, after all, just a model of the actual costs that will be realized throughout the life of the project. As the length of this analysis increases, the models are potentially less accurate. The owners must also take care in choosing appropriate discount rates, which is not a simple task. Inappropriate analysis periods or discount rates yield inaccurate results.

#### Bonding Requirements

Bonding on PPCs is even more critical than bonding on standard warranty projects because the contractors assume a larger investment over a much longer period of time. PPCs create a burden on both the contractor and the surety industry. Ideally, a large performance bond (5 percent or more) could be written for the life of the contract. In 1999, Denmark experimented with several different models for setting up performance bonds. One of these comprised a 5 percent bond based on the total contract sum for the life of the contract. In addition, a minimum of 15 percent of the total contract sum would not be paid before two-thirds of the dura-

Year	Plan of Payments Total Price (DKK)*	Plan of Activities
2001	100,000	Pavement repair
2002	200,000	Pavement repair
2003	3,650,000	Milling, strengthening, temp. road marking
2004	2,000,000	Wearing course, road marking
2005	8,000	Maintenance
2006	8,000	Maintenance
2007	8,000	Maintenance
2008	8,000	Maintenance
2009	250,000	Road marking
2010	8,000	Maintenance
2011	8,000	Maintenance
2012	8,000	Maintenance
2013	8,000	Maintenance
2014	500,000	Pavement repair
2015	50,000	Pavement repair
2016	300,000	Pavement repair
<b>TOTAL</b>	<b>7,114,000</b>	<b>Pavement repair</b>
<b>Total present value: 5,876,443 DKK</b>		
<b>Average yearly cost: 566,150 DKK</b>		

\*All in 2001 prices.

The average yearly cost is used to compare individual bids. The average yearly costs are calculated by multiplying the total present value with the factor "K".

$$K = r \cdot (1+r)^n / ((1+r)^n - 1)$$

r = internal real interest 5% per annum  
n = service life in years

**Table 5.3** Example plan of activities and payments.


tion of the contract. Another model called for a bond of 10 percent throughout the contract. But as Denmark later discovered, bonds of this size and duration are not maintainable within the policies of the surety firms. Since 2000, Denmark has settled on a 5 percent bond for 5 years and is working on other innovative payment mechanisms to ensure the solvency of the contractors.

**Payments**


Payment mechanisms for PPCs have the potential to be attractive for both the owner and the contractor. Multiple payment models were shown to the scan team, but they all involved much more standard payment sums than that found in traditional planning and bidding. The government or municipality has the option to offer an equal annual sum payment for the contract, which allows it to plan its budget. The contractor can expect an even cash flow, which allows it to plan its work and equipment investment. However, the contractor may need to finance some of the con-

struction costs, as work will be completed before the payment is received from the government. PPCs offer require the contractor to partner with a financial institute. The financial institutes are likely to see this type of contract as a good risk because the government is the source of revenue for the contractor. The graph in figure 5.5 is based on the payment mechanism for a PPC in Ronnede, Denmark.

Figure 5.5 is only one model for payment, and it can create a large financial burden for the contractor. Other models do not pay on a stipulated annual

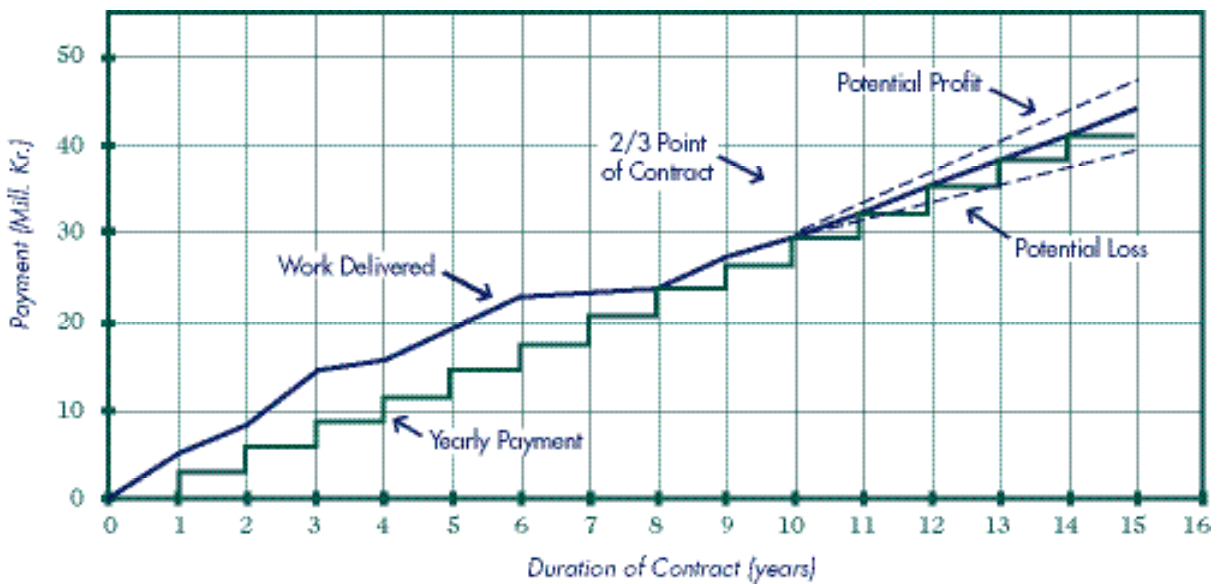

**Figure 5.5** Payment model example.

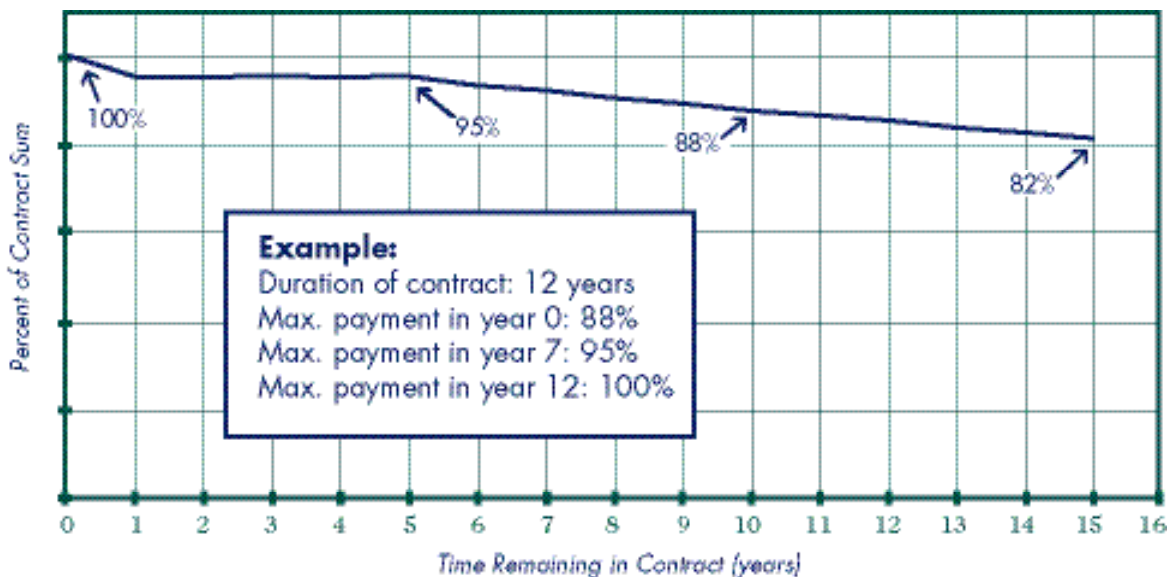

**Figure 5.6** Maximum accumulated payment as percentage of contract sum.

asis, but rather pay as a percentage of work completed for the first two-thirds of the contract. The contractor is only paid for work accomplished, until two-thirds of the warranty period has passed, whereupon it is paid according to the schedule whether work is required or not. This will allow the contractor to make a profit in the same manner as described in figure 5.5, but it will not create such a significant financial burden. However, the government is at greater risk of having the contractor default in the last 5 years of the contract. The Danish Draft Pavement Performance Specification recommends a payment schedule with significant retainage for completed work to protect against such a default. Figure 5.6 displays the recommended retainage schedule from the draft Specification.

Given the payment schedule in figure 5.6, the contractor will not be paid for 100 percent of the work until the final year of the contract. For example, if the work is completed in year 1 of a 16-year PPC, the government will pay only 88 percent of the construction cost. This retainage is lower as the contract moves forward. In years 10 to 15 of the contract, this retainage remains constant at 5 percent, and full payment is made in the final year. This payment system obviously protects the government in case of contractor default, and although the retainage creates a financial burden for the contractor, the long-term assurance of work allows for better planning of resources and equipment. The contractor also has the same incentive to keep the pavement at peak performance in the last years because it is paid the stipulated annual sum regardless of whether it is performing work or not.

Additional payment incentives and penalties are applicable to this system. In cases of noncompliance with the stated pavement specifications, PPCs often include a penalty system. These penalties may include no payment until the performance conditions are met or a monetary penalty in addition to not receiving the payment. Bonuses may include a monetary incentive or a contract extension. The hosts all mentioned penalty clauses, but none discussed the specific application of bonuses.

#### **Performance Indicators, Thresholds, and Measurements**

The performance indicators, thresholds, and measurements in PPCs are similar to those found in short-term performance warranties as discussed in chapter 4. The

main difference is the frequency of inspection for these items. Table 5.4 provides an example of the method of measurement and evaluation of compliance with the pavement specification. If the pavement specifications are not fulfilled, the pavement distress will be subject to remedial action. PPCs used in Denmark specify a selection of remedial methods that can be accepted (Simonsen and Thau, 2002).

As seen in table 5.4, the performance indicators are quite comprehensive. They require a comprehensive pavement management system to measure, verify, and store the data. These data are critical because they will correlate to the conditions of the roads for the users and also the contractor's profits or losses. Note that a combination of visual and equipment-based measurements are conducted. These are described in more detail in chapter 4. Note also that the time of year for the measurements is given. Many performance attributes vary in the course of time, e.g., seasonal variations affect smoothness. It is important that specifications are clear on when and where measurements are to be made.

Data collection for the performance indicators shown in table 5.4 is the first part of the PMS. Once the data are collected they must be analyzed for decisions to be made. The following example was provided to the scan team for the PMS in Ronnedø, Denmark. The PMS data are collected by means similar to those described in table 5.4. The data are then cataloged in a computer program such as the one shown in figure 5.7.

The data from PMS are then aggregated into a "condition index." The condition index is an aggregate of the measurements shown in the severity column above. The thresholds for the condition index are set at the beginning of the contract and correlate to the maintenance levels of each street segment, as follows: type 1 is a traffic road with bus routes, prime network streets; type 2 is a local road with bus routes; type 3 is a local road without bus routes; and type 4 is all other streets. A condition index is generated for the network as shown in table 5.5.

A survey is done on one-third of the network each year. The mean condition index must not be exceeded or corrective action will be required. The percentage of patches can be used for aesthetics. As the conditions change, the contractor may change its work plans, but the overall performance measure will remain.



**Innovation in Products and Processes**

Although PPCs represent only a small portion of the road network in Europe, their use is expected to rise. The contracting industry is helping to initiate this change with the goal of being allowed to introduce innovations in contracting methods and materials. The municipalities are more willing to allow innovation because the contractor is at risk for these innovations throughout the life cycle of the product. The

owners are also lacking expertise to evaluate these innovations, and PPCs offer a mechanism for quicker improvement to network condition. The owners think that they are benefiting through better prices and better quality because the contractors have an incentive to provide quality products early in the process to gain profit in the end. Owners see a benefit to the public through higher-quality roadways for the duration of the warranty period (15 years).

Performance indicator	Method of measurement	Period of Measurement	Frequency	Responsibility (1)
Friction	ROAR	Fall	(2)	Agency
Longitudinal evenness	Laser	Fall	(3)	Agency
Transversal profile and drainage of surface water	Visual inspection		Acute	Agency
Rutting	Laser	Fall	(3)	Agency
Instability	Visual inspection	Fall	Annual	Contractor
<b>Durability</b>				
Raveling	Visual inspection	Fall	Annual	Contractor
Joints	Visual inspection	Fall	Annual	Contractor
<b>Deterioration:</b>				
Longitudinal cracks	Visual inspection	Fall	Annual	Contractor
Transversal cracks	Visual inspection	Fall	Annual	Contractor
Alligator cracking	Visual inspection	Fall	Annual	Contractor
Potholes	Visual inspection	Fall	Annual	Contractor
Light reflection	Beta value	During construction	During construction	Contractor
Noise emission	Method not decided			
<b>Road marking:</b>				
Reflection	Reflectometer	1/5 - 15/10	Annual	Contractor
Friction	Pendulum	Fall	By request	Agency

(1) Responsible for the execution of the measurements. The Employer reserves the right to supplementary measurements.  
 (2) First and fifth year, then every 5 years.  
 (3) First and second year, then every 2 years.

**Table 5.4** Example evaluation of pavement specifications.



The PPCs have mainly seen innovation to date in processes rather than products. Work is often done from April through November in a number of European countries. By planning their work ahead, contractors can get early starts and attract better workers. They can also have a better workflow or scheduling for their staff. This level workflow also allows for time to do research and innovate. Finally, there is a “value chain effect” through better supplier relations that is created by the consistent workflow.

**Design-Build-Finance-Operate Contracts**

Where PPCs have extended the warranty concept to approximately the equivalent of one design life cycle, DBFO contracts are extending the concept through multiple pavement maintenance cycles. DBFO contracts are used for both construction and maintenance of European motorways. Drivers for the use of DBFO contracts range from lack of public funding to a belief that private financing and maintenance delivers a higher quality product and provides benchmarks for public sector performance.

The United Kingdom and Spain provided the team with examples of DBFO contracts. DBFO periods vary, but were commonly found to be 30 years. Both public agencies and DBFO companies commonly obtain long-term warranties from their contractors, but the team observed the use of maintenance contracts in lieu of warranties. The German, Danish, and Swedish hosts noted limited use of toll projects, but they did not share specific examples from these projects, and it was not clear if these were true DBFO projects. However, other examples of DBFO contracts throughout Europe found on other scanning tours will be discussed in this section.

DBFO contracts, commonly referred to as concession contracts, can take many forms, and the definition of a concession contract can vary slightly from agency to agency. The French have perhaps the longest history of concessions in Europe. A definition of a concession contract is found in A Draft Typology of Public-Private Partnerships as written by Rémy Prud’homme for the French Ministry of Public Works, Transport and Housing (Perrot and Chatelus, 2000):



<b>Road Id.</b> 515-9408-0	<b>From st.</b> 0,000	<b>To st.</b> 0,155	<b>Name</b> Virkelystvej
-------------------------------	--------------------------	------------------------	-----------------------------

**Pavement Conditions Index 3,5**

No. Observation	Severity	Cat.	%	Abs.
1 Alligator cracks	3 Large > 1/2 m <sup>2</sup>	A	7	56 m <sup>2</sup>
2 Longitudinal cracks 0-1 m from edge	1 Width < 1/2 cm	C	70	217 m
3 Longitudinal cracks > 1 m from edge and tr	1 Width < 1/2 cm	C	70	217 m
4 Ravelling	2 Fine particles dislodged	B	35	282 m <sup>2</sup>
5 Spalls or potholes	2 Medium < 1/2 m <sup>2</sup>	A	7	56m <sup>2</sup>
6 Depressions Settlements	1 0-2 cm	B	35	282 m <sup>2</sup>
7 Patches	1 Sporadically	A	7	56m <sup>2</sup>
8 Kerb	3 < 7 cm elevation	B	35	108 m
9 Crossfall	2 Along gutter	C	70	217 m
10 Footway	2 Reasonable	B	5	189 m

**Figure 5.7** Pavement management system for Danish pavement performance contract.

Maintenance Level	Mean Condition Index	Maximum Condition Index	Maximum Percentage of Patches
1	1.5	3	20
2	2.5	4.5	40
3	3.5	5.5	60

**Table 5.5** Example pavement performance contract condition index.

*“The concessionaire carries out all of the capital investment, operates the resulting service and is remunerated through service fees paid by users. The facilities are to be handed over to the oversight public authority at the end of the contract period.”* From this definition, it can be seen that DBFO contracts are an extension of warranties, maintenance contracts, and PPCs as discussed previously in this report. However, the primary difference lies in the private sector financing mechanism and the length of the contract, which is often double that of a PPC.

The United Kingdom began its DBFO program in the late 1990s as an outcome of its Private Finance Initiative. The motivation for the contracting method has many similarities to the motivation for the use of warranties. The objectives of this program are explained in the report “DBFO – Value in Roads: A Case Study of the First Eight DBFO Road Contracts and Their Development” (British Highways Agency 1997) as follows:

To ensure that the project is designed, maintained and operated safely and satisfactorily so as to minimize any adverse impact on the environment and maximize benefit to road users;

- To transfer the appropriate level of risk to the private sector;
- To promote innovation, not only in technical and operational matters, but also in financial and commercial arrangements;
- To foster the development of a private sector road-operating industry in the UK; and
- To minimize the financial contribution required from the public sector.

The final performance results will not be known until the end of the contract. However, some selected lessons learned on the first eight DBFO projects completed in the United Kingdom are listed in the report as follows:

DBFO contracts have accelerated the introduction of cost efficiencies, innovative techniques and whole-life cost analysis into the design and construction of road schemes and the operation of roads (although the Agency had started to review these possibilities in the context of traditional methods of procurement).

- The full potential of efficiencies, innovation and whole-life cost analysis inherent in the Private Finance Initiative is likely to be fully unlocked only when the private sector is involved in the outline design of the road scheme, which they are then obliged to construct, operate and maintain under a DBFO contract. This requires the private sector to assume some planning risk. Some of the DBFO projects announced introduce the concept of planning risk and will test the proposition that this will deliver better value for money.
- The risk allocation on DBFO contracts has been encouraging. Two areas where transfer of risk to the private sector has delivered good value for money are protestor action and latent defect risk. The Agency will continue to look for risk transfer to ensure that the DBFO contracts remain off-balance sheet.
- DBFO contracts have delivered value for money. Cost savings (compared with the public sector comparator) have ranged from marginal to substantial; for Tranche I and 1A DBFO contracts, the average cost saving is 15%.
- With eight contracts let and expressions of interest received for further projects, it is clear that a road-operating industry is developing. The same consortia (with a few changes in composition) have appeared as bidders on projects within each group.

Durations of concessions in Europe can be found from less than 5 years to more than 75 years, but the majority are under contract for 15 to 30 years. Many of the contracts also contain windows of profitability for determining the end of the contract given that traffic forecasts for 30 years in the future are ques-

onable. If traffic forecasts are wrong, there are only two options for equitable compensation for the project: change the rate of tolls (or payments) or change the duration of the contract. Political and financial liability typically limit changes in the rates charged. Possible solutions to problems caused by inaccurate traffic forecasts are to provide some mechanism for changing toll rates and, if necessary, changing the total duration of a concession to provide an equitable compensation to the concessionaire.

The hosts discussed a number of financing and payment options for funding DBFO projects. The United States typically employs a user-based toll paid directly by the user. Both the United Kingdom and Spain described the use of “shadow tolls” for their DBFO projects. Shadow tolls are an alternative financing payment mechanism in which the government pays a private sector partner (DBFO or concessionaire) for a project on the basis of the number of vehicles that use the facility. Traditional sampling methods and high-tech real count mechanisms are in use to count the vehicles for the shadow toll payments. The government receives the initial project financing from the private sector partner, and the partner takes the risk/reward for the number of vehicles that use the road. In addition, the operational nature/characteristics of the shadow toll payments may assist the government in more effectively managing its debt. This is because shadow toll payments are determined and made on a periodic basis—most commonly on an annual basis. Accordingly, the government and investment community may properly consider these shadow toll payments to be an item of operating expense; and, as an operating rather than capital expense, it generally need not be included in calculating debt ratios or debt capacity. Such an operating definition hereby provides the government with debt-management flexibility in the event that its revenues fall below expectations or if its cash-flow position deteriorates for some other reason.

As previously described, the role of a concessionaire goes far beyond simply warranting a project. Not only do the concessionaires have to maintain prescribed quality for the government, but also they now must prove to their financial lenders and shareholders that they are delivering and maintaining a quality product. From what the host concessionaires described on the scan tour, these lenders and shareholders are sometimes more demanding than the highway agencies have ever been.

Unfortunately, the European hosts on this Asphalt Pavement Warranty Scan did not provide the performance terms of the DBFO contracts. However, the performance terms of a similar DBFO project were provided from Portugal for the 2002 Contract Administration Scanning Tour (FHWA, 2002). The performance terms of that contract include:

- The Concessionaire must keep Motorways in very good conservation and perfect condition of utilization, carrying out all the necessary works in order to permanently satisfy the Motorways purposes.
- The Concessionaire is responsible for the high standards of conservation and functioning of environmental monitoring equipment, environmental conservation and preservation systems and noise protection system.
- The Concessionaire must respect minimum quality standards, such as pavement bond and smoothness, conservation of signaling, clients assistance and safety equipment.
- Specific performance tests include:
  - Tests with FWD every 100m, including visual inspections
  - Longitudinal irregularities determination
  - Pavement depression due to heavy traffic measures
  - Friction measures
  - Pavement degradation report
- They have four separate performance contracts:
  - Contract 1
    - Vegetation (shrubs and plants) Maintenance
    - Cleaning and Sweeping
    - Fencing repairing and maintenance
  - Contract 2
    - Safety equipment repairing and conservation
    - Traffic sign, road sign and safety guards
  - Contract 3
    - Civil Engineering works Conservation and Maintenance
    - Drainage
    - Sloping Banks
    - Pavements
    - Concrete Structures
  - Contract 4
    - Engineering Structures Maintenance

## *U.S. Parallel: Public-Private Partnerships*

U.S. PPPs most closely resemble the European DBFO models described in this chapter. The following is an excerpt from the American Association of Transportation Official's Primer on Contracting for the Twenty-First Century: A Report of the Contract Administration Task Force of the AASHTO Subcommittee on Construction, which describes the use of PPPs in the United States. (AASHTO, 2001).

"A 'public-private partnership' is a broad term used to describe a contract between a public owner and a private entity who have agreed to certain financial and contractual responsibilities. In such contracts, a private entity finances or invests in a transportation project by developing, designing, building and/or maintaining a roadway or bridge for a specified duration in return for monetary compensation, toll revenues or development rights. Many of the first U.S. roadways were privately financed by associations, users and the automotive industry. In some countries, concessionaires are used to allow corporations with mixed capital structure or privately owned corporations to finance, design, build and operate toll roads."

### Examples of PPPs in the United States

- CA** Build Operate Transfer (transfer after construction); SR-91 Express Lanes, US\$126 million
- CO** E-470 46-mile beltway along the eastern edge of the Denver metro area, US\$1.2 billion
- MO** Build Operate Transfer, Lake of the Ozarks Bridge, US\$23.6 million
- VA** Build Operate Transfer, Dulles Greenway, US\$325 million
- VA** Rt. 895 Connector, DB/F, via the VA Public-Private-Transportation Act, US\$323 million
- VA** Route 288 via the VA Public-Private-Transportation Act, US\$236 million
- VA** Coalfields Expressway via the VA Public-Private-Transportation Act, US\$1.1 billion
- TX** Texas Turnpike Authority 122-mile contiguous tollway, US\$3.22 billion

As demonstrated above, the performance terms of the DBFO contract are based on many of the same performance measurements being used for warranty

contracts. Because the overall goals of ensuring performance for the traveling public are similar, the DBFO contracts can be viewed as an extension of warranty contracts. However, DBFO contracts transfer much more of the risk for financing and performance to the private sector. DBFO contracts constitute a major departure from traditional highway delivery in the United States, but if the evolution of performance contracting in the United States follows that of Europe, there may be more DBFO contracts on the not-so-distant horizon.

### Conclusions

This chapter provided an overview of the evolution of short-term material and workmanship warranties to performance warranties, maintenance contracts, PPCs, and DBFO contracts. The long history of success with these short-term performance solutions has provided incentives for the European hosts to experiment with these alternative delivery methods. All of the host countries are looking at alternative delivery methods as a mechanism to increase innovation without creating a burden on highway agency staff. The contracts described in this chapter are new and somewhat untested when compared with the warranty methods described in previous chapters, but the hosts were confident that these approaches could be applied in a balanced contracting program to deliver value to the public.

The alternative delivery methods use many of the same mechanisms discussed in the description of short-term warranties found in chapters 3 and 4. Performance indicators, thresholds, and measurement are perhaps the most similar in nature. The primary differences involve the lengths of warranties, financing, and responsibilities for operation and maintenance.

The United States may well benefit from the alternative delivery methods described in this chapter. PPCs in particular may hold great benefit for counties and municipalities throughout the United States, and could gain acceptance relatively quickly. The continued application of pavement warranties will help the United States gain an understanding of performance contracting, which is critical for successful application of these alternative delivery methods. It is difficult to say if the United States will follow the same path as the Europeans in the application of alternative delivery methods, but a similar evolution may be forthcoming.

# Observations Recommendations and Implementation

This scan team reviewed and documented the policies and strategies used in Europe to determine risk assessment and administer warranty contracts. The European hosts prepared formal presentations and written documents for technology transfer to the United States. In addition, the hosts provided the team with candid insights regarding the successes and challenges that they face with their warranty programs. Throughout the study, team members discussed their observations and critically evaluated which of the techniques and strategies used in the host countries could be practically and successfully implemented in the United States. Team members met at the end of the study to review their findings and developed the following summary observations, recommendations, and implementation strategies. These observations, recommendations, and implementation strategies are those of the scan team and not FHWA.

## **Summary Observations**

The European and U.S. transportation communities are quite similar in terms of the political, financial, and resource challenges that they face. However, the European transportation agencies are better leveraging the innovative management techniques, technical innovations, and financing capabilities of the private sector. There is a more spirited effort of partnership and collaboration between the public and private sectors in Europe than in the United States. The summary observations are listed below to provide a context for the recommendations and implementation strategies.

## **Similar Transportation Needs**

European transportation systems have growing capital project needs as well as a backlog of maintenance requirements, not unlike the United States.

## ***Long History of Material and Workmanship Warranties***

- Material and workmanship warranties of varying length have been used in the European host countries for 30 to 40 years.

## ***Purchasing Performance in Addition to Materials***

- Those countries with long material and workmanship warranties histories are moving toward pavement performance warranties and other methods of tying the contractor into the full life cycle of the product.

## ***Best-Value Procurement***

- A focus on quality exhibited by the use of best-value procurement.

## ***Public-Private Partnering***

- Strong partnerships between agency and all sectors of the industry.

## ***Motivation for Alternative Contract Methods***

- Motivation for warranties, performance-based contracts, and DBFO concessions include:
  - Need for innovation
  - Need for private sector to finance system upgrades
  - Desire to improve quality
  - Desire to improve efficiency
  - Resource issues

## ***Balanced Contracting Approach***

- Transportation agencies are using a balanced approach in implementing traditional contracting, warranties, performance-based contracts, and DBFO concessions.

## ***Financing***

- Available tax dollars is an issue, which is compounded by the new EU requirement for less than 3



percent capital debt. Many of the European countries are exploring innovative financing mechanisms and incorporating private financing into their highway networks.

### ***Outsourcing of Maintenance***

- Term maintenance contractors from the private sector are used exclusively in some of the host countries, and the other countries are also increasing their use of such contractors. This knowledge of maintenance in the private sector is resulting in more integrated life cycle solutions for highway network needs.

### **Recommendations**

The European host countries all believe that their long history of warranty application has improved the performance of their highway and trunk road systems. Their warranty systems continue to evolve through a customer-focused partnership between government and industry. Best-value procurement and prequalification are vital elements of the warranty system. Material and workmanship warranties are in use on all short-term warranties. Five-year performance warranties are in use when the contractor completes some level of design. The long-term performance warranties include design, construction, and some type of planned maintenance. The Europeans hosts use all of these warranties in balanced contracting approaches.

This scan team, which was composed of members from Federal, State, and local agencies, industry, and academia, offers the following recommendations on the basis of its observations of successful warranty programs in Europe:

#### ***Federal Government***

- **Warranty requirements:** The Federal government should require short-term material and workmanship warranties on all federally funded projects. This should be the first step in moving toward common use of long-term performance warranties in the future.
- **Enable best-value and prequalification legislation:** Assist with enabling legislation to allow contract awards based on technical and quality factors in addition to cost (i.e., best-value and prequalification methods).
- **Warranty resource center:** Create resource center(s) to facilitate and assist in implementing and evaluating warranties. The Federal government should act as a leader for the State, county, and local governments.

#### ***State and Local Government***

- **Create model warranty documents:** Draft contract documents for warranty implementation with representation from all stakeholders. AASHTO should take the lead in the creation of these documents in collaboration with local governments and industry.
- **Implement material and workmanship warranties:** The State and local highway agencies should develop material and workmanship warranty programs through internal education and industry participation
- **Implement short-term performance warranties:** State and local highway agencies should implement short-term performance warranties when it is appropriate for the contractor to perform the necessary design.
- **Enable best-value and prequalification procedures** State and local highway agencies should work to enable legislation allowing contract awards that are based on technical and quality factors in addition to cost.

#### ***Industry***

- **Education:** Develop an awareness and understanding of warranty issues and risks.
- **Participation:** Proactively participate in roundtable discussions on warranties.
- **Pilot projects:** Consider proposing on pilot projects.
- **Operation and maintenance competencies:** Consider expanding knowledge of operation and expertise of materials and products for future competitiveness.

#### **Implementation**

The scan team formed a small group to develop a scan technology implementation plan (STIP). The plan outlines a series of activities to disseminate, test, assess, and implement the techniques and strategies discovered on the study. These activities focus on awareness, understanding, commitment, and action. The STIP Team includes Monte Symons, FHWA; Steve Bower, Michigan DOT; Gerald Huber, Heritage Research Group; and Jim Wood, City of Dallas.

#### ***STIP Observations***

The STIP Team developed the following list of observations relevant to the implementation plan:

1. Each country has a long history of involvement in asphalt warranties, and all believe that warranties have improved the quality of the system.



- . All five countries use a best-value system in lieu of the low bid only to determine contractors on warranty contracts.
- . There is a direct relationship between contractor involvement in construction and materials specifications and length of warranty period. Short-term warranty periods (1-2 years) have limited contractor involvement, and in the longest warranty periods the contractors are allowed to use most of their own specifications materials.
- . Pavement condition and performance criteria have been established from historical records.
- . Contract responsibilities are specific and generally hold contractors responsibility for only those items that are under their control.
- . Contractor responsibility for pavement maintenance is a part of all warranty contracts if pavement performance criteria are not achieved or maintained.
- . The relationships and cooperation between owner agencies and warranty contractors is significantly different than in the United States.

#### **TIP Recommendations**

The STIP Team believes that substantial change in existing contracting processes in the United States is required to implement ideas and concepts identified during the Asphalt Pavement Warranty Scan. To accomplish these changes, the STIP Team has identified a change model that consists of activities associated with (1) awareness and understanding of the scan findings, (2) commitment of agencies and industry to some underlying warranty contract principles, and (3) specific actions that will facilitate more widespread and common use of asphalt warranties. The following tasks and subtasks are proposed to implement the findings:

#### **Task 1.0 – Widespread Distribution of Scan Findings**

- .1 Provide support for members to make presentations on the scan findings to targeted audiences, such as industry associations, key industry/owner technical working groups, agency technical and management groups (estimated 15 to 20 presentations).
- .2 Develop and distribute glossy brochure summarizing findings and recommendations.
- .3 Develop a detailed implementation plan that provides documentation of benefits based on sound business principles from both the owner and contractor perspectives.

#### **Task 2.0 – Trial Use and Evaluation of Asphalt Pavement Warranty Contracts**

- 2.1 Establish an executive national TRB committee to overview implementation and evaluate results of trial asphalt pavement warranty contracts.
- 2.2 Establish subgroups to develop guidelines that address specific broad issues, such as arbitration standards, bonding requirements, prequalifications, and contract award issues.

#### **Task 3.0 – Specific Actions for Implementation**

- 3.1 Provide uniform pavement performance evaluation of trial and innovative contracts that use asphalt pavement warranty concepts.
- 3.2 Document and distribute cost-benefit information on trial contracts.
- 3.3 Prepare and distribute asphalt pavement warranty guidelines.
- 3.4 Prepare policy guidance documents for justification of asphalt pavement warranty contracts for Federal, State, and local projects, with examples.

#### **Conclusions**

U.S. highways agencies are continuously striving to improve the performance of their pavements while reducing life cycle costs through the use of appropriate technologies and contracting mechanisms. These agencies are striving for these improvements in an environment of diminishing agency personnel and increasing traffic demands. The scan team believes that these agencies will realize benefits from the use of warranty contracting, but they will need to develop new roles and responsibilities alongside the private sector in an environment that appropriately allocates risk.

The scan team members strongly recommend that the innovative ideas described in this report be considered and evaluated for use in the United States, because they could improve the performance of our pavements and create an environment of long-term partnership between the public and private sectors. The true value of this information will only be realized when these recommendations are shared, evaluated, and, as appropriate, put into place. The challenge ahead is to find champions to test these ideas and disseminate the results in the hopes that the U.S. highway industry can benefit from the experiences of its peers in Europe.

# Scan Team Members

## Contact Information

### John D'Angelo (Co-Chair)

Asphalt Materials Engineer  
Federal Highway Administration  
HIPT-10  
400 Seventh Street, S.W.  
Washington, D.C. 20590  
Telephone: (202) 366-0121  
Fax: (202) 493-2070  
E-mail: [john.d'angelo@fhwa.dot.gov](mailto:john.d'angelo@fhwa.dot.gov)

### Gary C. Whited (Co-Chair)

Administrator  
Division of Transportation  
Infrastructure Development  
Wisconsin Dept. of Transportation  
4802 Sheboygan Avenue (Rm 451)  
P.O. Box 7965  
Madison, WI 53707-7965  
Telephone: (608) 267-7774  
Fax: (608) 264-6667  
E-mail: [gary.whited@dot.state.wi.us](mailto:gary.whited@dot.state.wi.us)

### Keith R. Molenaar (Report Facilitator)

Assistant Professor  
Dept. of Civil, Environmental  
& Architectural Engineering  
University of Colorado at Boulder  
Campus Box 428, ECOT 411  
Boulder, CO 80309-0428  
Telephone: (303) 735-4276  
Fax: (303) 492-7317  
E-mail: [keith.molenaar@colorado.edu](mailto:keith.molenaar@colorado.edu)

### Steven C. Bower

Pavement Engineer  
Michigan Dept. of Transportation  
Construction and Tech. Div.  
P.O. Box 30049

8885 Ricks Road  
Lansing, MI 48909  
Telephone: (517) 322-5198  
Fax: (517) 322-5664  
E-mail: [bowers@michigan.gov](mailto:bowers@michigan.gov)

### Gerald A. Huber

Associate Director of Research  
Heritage Research Group  
7901 West Morris Street  
Indianapolis, IN 46231-3301  
Telephone: (317) 390-3141  
Fax: (317) 486-2985  
E-mail: [gerald.huber@heritage-enviro.com](mailto:gerald.huber@heritage-enviro.com)  
Representing National Asphalt  
Pavement Association (NAPA)

### David R. Jones, IV

Pavement Technical Manager  
Trumbull Asphalt/Owens Corning  
5616 Piney Lane Drive  
Tampa, FL 33625  
Telephone: (813) 908-1633  
Fax: (813) 908-3524  
E-mail: [david.jones4@owenscorning.com](mailto:david.jones4@owenscorning.com)  
Representing NAPA

### Reaburn E. King

Executive Vice President  
Michigan Asphalt Pvmnt. Assn.  
6639 Centurion Drive, Suite 120  
Lansing, MI 48917  
Telephone: (517) 323-7800, Ext. 13  
Fax: (517) 323-6505  
E-mail: [rking@mi-asphalt.org](mailto:rking@mi-asphalt.org)  
Representing NAPA

### Timothy L. Ramirez

Chief, Engineering Technology &

Information Division  
PA Dept. of Transportation  
1118 State Street  
P.O. Box 2926  
Harrisburg, PA 17105-2926  
Telephone: (717) 783-6714  
Fax: (717) 783-5955  
E-mail: [tramire@dot.state.pa.us](mailto:tramire@dot.state.pa.us)

### Jon F. Rice

Managing Director  
Kent County Road Commission  
1500 Scribner Ave., NW  
Grand Rapids, MI 49504  
Telephone: (616) 242-6960/6900  
Fax: (616) 242-6980  
E-mail: [jrice@kentcountyroads.net](mailto:jrice@kentcountyroads.net)  
Representing National Association  
of County Engineers (NACE)

### Jeffrey S. Russell

Professor and Chair, Construction,  
Engineering and Management  
Programs  
University of Wisconsin at Madison  
2304 Engineering Hall  
1415 Engineering Drive  
Madison, WI 53706  
Telephone: (608) 262-7244  
Fax: (608) 265-9860  
E-mail: [russell@engr.wisc.edu](mailto:russell@engr.wisc.edu)

### Richard K. Smutzer

Chief Highway Engineer  
Indiana Dept. of Transportation  
100 N. Senate Avenue, Room N755  
Indianapolis, IN 46204  
Telephone: (317) 232-5529/5530  
Fax: (317) 232-0238  
E-mail: [rsmutzer@indot.state.in.us](mailto:rsmutzer@indot.state.in.us)

**James J. Steele**

Division Administrator  
Federal Highway Administration  
Michigan Division  
15 West Allegan Street  
Lansing, MI 48933  
Telephone: (517) 702-1845  
Fax: (517) 377-1804  
E-mail: [jamesj.steele@fhwa.dot.gov](mailto:jamesj.steele@fhwa.dot.gov)

**Monte G. Symons**

Infrastructure Team Leader  
Federal Highway Administration  
Midwest Resource Center  
19900 Governors Drive, Suite 301  
Olympia Fields, IL 60461-1021  
Telephone: (708) 283-3549  
Fax: (708) 283-3501  
E-mail: [monte.symons@fhwa.dot.gov](mailto:monte.symons@fhwa.dot.gov)

**James W. Wood**

Director of Street Services  
3112 Canton Street, Suite 200  
Dallas, TX 75226-1618  
Telephone: 214-670 4491  
Fax: 214-670 4488  
E-mail: [jimwood@mail.ci.dallas.tx.us](mailto:jimwood@mail.ci.dallas.tx.us)  
Representing: American Public  
Works Association (APWA)

**Team Biographies**

**John D'Angelo (Co-Chair)** is a pavement engineer for the FHWA, Office of Pavement Technology. Mr. D'Angelo has been with FHWA for 25 years. For the last 19 years he has been involved with technology development and transfer in the pavements area. These activities included pavement design, materials testing, construction quality control, and construction operations. For the past 10 years Mr. D'Angelo has been involved in the further development and implementation of the Strategic Highway Research Program Superpave Asphalt Design System in the highway industry. As part of Mr. D'Angelo's current activities he is putting together programs to promote asphalt pavement warranties and performance-related specifications in the United States. Mr. D'Angelo is a member of the TRB, the Association of Asphalt Pavement Technologists (AAPT), the Canadian Technical Asphalt Association, the AASHTO Subcommittee on Materials, and ASTM.

**Gary C. Whited (Co-Chair)** is the Administrator of the Division of Infrastructure Development for the Wisconsin DOT (WisDOT) in Madison, Wisconsin. As Administrator, Mr. Whited manages the headquarters engineering division of WisDOT that is responsible for the development and operation of Wisconsin's highways, airports, harbors, and railroads. The division focuses on development of policies and standards for these transportation systems, which includes management of the highway design and construction programs. He has been with WisDOT for 31 years, 10 years of which he was Director of the Bureau of Highway Construction and was directly responsible for administering the statewide highway materials and construction programs. Mr. Whited holds a Bachelor of Science degree in Civil Engineering from Iowa State University and a Master of Science degree in Civil Engineering from the University of Wisconsin-

Madison. He is a member of the AASHTO Standing Committee on Highways, and he has served on numerous TRB committees and project panels.

**Keith R. Molenaar (Report Facilitator)** is an Assistant Professor with the Construction Engineering and Management Program in the Department of Civil, Environmental and Architectural Engineering at the University of Colorado at Boulder. His research focuses on alternative delivery strategies for the procurement of infrastructure and constructed facilities. His responsibilities include the coordination of a collaborative research effort aimed at exploring alternative delivery methods, analyzing project performance, and disseminating research results to owners, designers, constructors, and students. Dr. Molenaar was previously a faculty member at the Georgia Institute of Technology where he was Group Leader of the Construction Research Center's Procurement and Project Delivery research initiative. Dr. Molenaar has a BS degree in Architectural Engineering and MS and Ph.D. degrees in Civil Engineering from the University of Colorado at Boulder. Dr. Molenaar is an active member of the American Society of Civil Engineers (ASCE), the Design-Build Institute of America (DBIA), and the Construction Management Association of America (CMAA).

**Steven C. Bower** is the State Pavement Engineer for the Michigan DOT in Lansing, Michigan. Mr. Bower currently directs the department's pavement management, pavement design, and pavement selection functions. He also directs and participates in various pavement research efforts relating to pavement design, construction, and materials. Recent special projects include leading teams that developed new department procedures and specifications for alternate pavement bidding, warranty usage and

implementation, and pavement selection. Mr. Bower has served with the Michigan DOT for 18 years with an emphasis in design and construction. He is a graduate of Michigan Technological University and holds a Bachelor of Science degree in Civil Engineering. He is a licensed professional engineer in Michigan and serves on the national Performance Related Specification (PRS)/Warranty task group.

**Gerald (Gerry) A. Huber** is the Associate Director of Research for the Heritage Research Group in Indianapolis, Indiana. He is responsible for performing research on hot mix asphalt and contracting methods. He is also responsible for implementing new asphalt technology and performing forensic analysis of existing projects. He has been with the Heritage Research Group for 10 years. Prior to joining Heritage, he worked 5 years for the Asphalt Institute where he worked on the SHRP and 10 years for Saskatchewan Highways and Transportation in Canada. He graduated from the University of Saskatchewan with a Bachelors of Science degree in Civil Engineering and from the University of Texas with a Master of Science degree in Civil Engineering. He is a licensed professional engineer and serves on various TRB and ASTM committees. He was the president of the Association of Asphalt Paving Technologists for 2001-2002.

**David R. Jones, IV**, is the Pavement Technical Manager for the Trumbull Asphalt division of Owens Corning Corporation, which has 18 bitumen plants in the United States. Dr. Jones is responsible for the formulation of traditional and modified bitumens to meet the requirements of the SHRP binder specifications. He also is responsible for new product design of fiberglass-based geotextile materials for use in pavement structures. Dr. Jones was the lead chemist at the University of Texas during the SHRP program, leading research programs concerning polymer modification, asphalt chemistry, and aggregate/asphalt interactions. Following SHRP, he spent 6 years with an independent testing and research laboratory directing analysis and mix design for Superpave mixes. Dr. Jones received his Ph.D. in Chemistry from the University of Missouri at Columbia in 1976. He is active in the regional User-Producer Groups in the United States, is a board member of the Southeastern group, and participates in several subcommittees of the groups. He is a member of TRB, AAPT, ASTM, and CTAA.

**Reaburn E. King** is the Executive Vice-President for the Michigan Asphalt Paving Association (MAPA). Mr. King

is director of the contractor member association, which represents the major asphalt producing and paving companies in the State of Michigan. Mr. King, working through the association, interacts with the State DOT in its current warranty implementation activities and manages the marketing and quality initiatives with county, city and private commercial programs. Prior to joining the MAPA, Mr. King served as Director of Asphalt Plant Equipment manufacturing and worldwide sales for Cedar Rapids, Inc. He has over 20 years of industry experience, working with both international and domestic contractors. Mr. King holds diplomas from the Devry Institute of Technology and Texarkana College. He is a member of the Legislative Committee and participates in technical committees for the NAPA. He also serves as a member of the advisory board for a scholarship program for the Pavement Design, Construction and Materials Enterprise at Michigan Technological University.

**Timothy L. Ramirez** is the Division Chief for the Engineering Technology and Information Division in the Bureau of Construction and Materials, Pennsylvania DOT (PENNDOT). Mr. Ramirez manages PENNDOT's evaluations of new products, technologies, and techniques for consideration to be approved and implemented statewide. For the past 7 years, Mr. Ramirez has been involved in PENNDOT's goal to implement the Superpave Asphalt Mixture Design System in 100 percent of its construction and maintenance activities. Mr. Ramirez drafted PENNDOT's proposed asphalt pavement warranty specification and piloted the specification on several construction projects. Overall, Mr. Ramirez has been with PENNDOT for 14 years working in the construction and materials areas. Mr. Ramirez holds a Bachelor of Science degree in Civil Engineering from the University of Pittsburgh and is a registered professional engineer in Pennsylvania. Mr. Ramirez is a member of the American Society of Highway Engineers.

**Jon F. Rice** is Managing Director of the Kent County Road Commission (KCRC), Kent County, Michigan. Mr. Rice has managed Michigan's third-largest county road system for the past 8 years and is responsible for construction, maintenance, planning, and administration for 2,600 miles of county and State roads. Prior to joining KCRC, Mr. Rice worked for 22 years with the Michigan DOT as an engineer manager for construction and maintenance of State roads in the West Michigan region. With KCRC, Mr. Rice has been active in developing an asphalt pavement management



ystem that provides condition and project life forecasting to be used in determining potential warranty requirements. Mr. Rice holds a Bachelor of Science degree in Civil Engineering from Michigan State University and is a licensed professional engineer in Michigan. He represents Michigan on the National Association of County Engineers' Board of Directors and is currently President of the Michigan County Road Association. Mr. Rice is a member of ASCE, ARTBA, and APWA.

**Affrey S. Russell** is Professor and Chair of the Construction Engineering and Management Program at the University of Wisconsin-Madison. Dr. Russell currently directs the Construction Engineering and Management Program, which involves teaching at the undergraduate and graduate levels, research, and professional service. Dr. Russell has served with the University of Wisconsin-Madison for more than 12 years and has been an active researcher in the highway construction area. Dr. Russell is a graduate of the University of Cincinnati and holds Masters and Ph.D. degrees from Purdue University. He is a licensed professional engineer in Wisconsin and serves on the TRB 2F02 Flexible Pavement Construction & Rehabilitation Committee. He is an active member of the ASCE.

**Richard K. Smutzer** is Chief Engineer of the Indiana DOT (INDOT). Mr. Smutzer is responsible for the development and construction of agency projects, including the updating and revising of specifications, standard drawings, and policies. He has been with INDOT for 28 years, 26 years of which was in various positions in the Materials and Tests Division, including geotechnical engineering, concrete engineer, and materials services engineer. Prior to his appointment as Chief Engineer, Mr. Smutzer was the Chief, Materials and Tests Division for 5 years during which he was a member of numerous committees, including the original INDOT/Industry HMA Pavement Warranty Committee, the Concrete Pavement PRS Committee, and several other pavement development and pavement distress investigation groups. Mr. Smutzer is a graduate of Purdue University with BSCE and MSCE degrees in Geotechnical Engineering. He is a licensed professional engineer in Indiana, serves as INDOT's ASHTO member of SCOH, and serves on several TRB committees and panels, including the LTPP committee.

**James J. Steele** is a Senior Management Official for the FHWA in the Michigan Division Office in

Lansing, Michigan. Mr. Steele is currently responsible for the delivery of the Federal-aid highway program to the State of Michigan. He is currently working with the Michigan DOT (MDOT) in developing process and requirements for performance pavement warranties. Prior to moving to Michigan in 1996, he served as the Assistant Division Administrator in the state of Ohio and with the FHWA regional office in Chicago where he was the Regional Environmental Program Manager. Mr. Steele is a graduate of the Indiana Institute of Technology and holds a Master's of Civil Engineering in Transportation from Clemson University. He is a licensed professional engineer in Washington, D.C. and is presently serving on an International Border Working Group to develop a new U.S.-Canada border crossing.

**Monte G. Symons** is the Team Leader of the Infrastructure Unit in the Midwestern Resource Center (MRC) of the FHWA, Olympia Fields, Illinois. Mr. Symons currently leads efforts for FHWA in the midwestern United States to implement innovative highway construction contracting methods and procedures. He has been involved in highway materials, pavement design, evaluation, and research for over 28 years. Recently, he has been involved in the Long Term Pavement Performance (LTPP) research project and the development of a new 2002 pavement design procedure. Mr. Symons is a graduate of the University of Illinois and holds both Bachelor of Science and Master of Science degrees. He is a licensed professional engineer in Washington and serves on committees for the ASCE, NCHRP, and National Academy of Sciences.

**James M. Wood** is Director of the Street Services Department for the city of Dallas, Texas. Mr. Wood currently is responsible for the maintenance of more than 14,000 lane miles of streets and alleys and directs the pavement management program that monitors the conditions of streets and alleys and determines appropriate preventive maintenance, repair, or capital construction needs. Recently, he has been involved in efforts to implement a citywide project management system to monitor construction from inception through warranty. Prior to joining the Street Services Department in 1998, Mr. Wood spent 3 years in the city of Dallas Department of Public Works. Mr. Wood received a Bachelors of Arts and a Master's degree in Public Administration from Texas Tech University. He is a member of the APWA and the Texas Public Works Association.

# Amplifying Questions

## I. General

### A. Context of Transportation in Country

1. Describe the key aspects of how transportation is positioned within the political, economic, and technological structure of your country. Please comment on items such as funding, owner structure, market structure, market competition, contractor associations, use of public-private partnerships, and the roles and responsibilities of the primary stakeholders in the transportation life cycle.

### B. Warranty Program Background

1. Describe the evolution of your country's asphalt pavement warranty program. Consider the original motivation for implementation, how long has your country been using these warranties, the percent of your transportation program that uses warranties, the impact of the warranty program on your internal staff, the impact on the private marketplace, the current goals of your warranty program, and describe any internal and external barriers that you have encountered in implementing your asphalt pavement warranty program.
2. Does your country use warranties on items other than asphalt pavement? If applicable, please state the other major items that are warranted.

## II. Implementation

### A. Program Specific Issues

1. What criteria are used to designate projects for use of asphalt pavement warranties?
2. What products are specifically warranted on asphalt pavement projects?
3. What are the standard lengths of warranty periods? How does warranty length relate to the expected pavement service life? If multiple warranty lengths are used for different projects, how are these lengths determined?
4. Do warranties cover workmanship, product performance, and/or other items?

### B. Project Scope Definition

1. Who determines existing traffic loads and climatic conditions for the pavement design?
2. Do contractors rely on public agency pavement performance data to assess their risk in a warranty situation or do they use other measures? Do you have tools for predicting pavement life that the contractors can use when assessing the risk of providing a warranty?
3. How are interactions between warranted product (asphalt) and other products (such as subgrade) assessed and incorporated into the design?
4. Is a life cycle cost analysis performed for asphalt pavement warranty projects? If so, is it only for the life of the pavement warranty or beyond?
5. Are user delay costs evaluated in warranty projects? For example, is disruption to traffic for construction or future treatments of maintenance or corrections considered?

### C. Pre-Contract Award

1. Is there a prequalification process for warranty contractors? If applicable, what are the prequalification criteria?
2. What type of bond or financial assurance is required to support the contractor warranty effort? If applicable, how are the values determined?

### D. Contract Award (Design and Construction)

1. Who designs the pavement structure under a typical asphalt pavement warranty contract? If the design is not done by the agency, does the agency review and approve the design?
2. Who selects the project specific materials under a typical asphalt pavement warranty contract? If the material is not selected by the agency, does the agency review and approve the selection?
3. Describe the testing and verification of materials during construction. Does the owner, provider, or a third party test or verify the materials?



- . Describe the inspection of construction processes. Does the owner, provider or a third party inspect the construction processes?

**}. *Payment***

- . How is work verified as complete and how is payment distributed on an asphalt warranty project? If you use pay equations for warranty projects, could you provide us with examples?
- . Are retainage systems (monies held by the owner until final inspection) used during or after construction?
- . Are incentives paid or penalties assessed for performance during construction or during maintenance of the product?
- . What is the distribution in costs for administration in typical asphalt pavement warranty projects?

**}. *Final Acceptance***

- . Is there a final inspection of the product before the warranty process begins? For example, after final acceptance for payment and before beginning of warranty period?
- . At the end of the warranty period, is there an official closeout function where the pavement is inspected and an assessment made as to whether the pavement has performed as expected?

**}. *Operation and Maintenance***

- . How are traffic loads and climatic conditions accounted for during the warranty period?
- . Is the warranty provider or the owner responsible for routine/emergency maintenance during the warranty period?
- . When the warranty provisions are enforced, how is the contractor requested to repair/fix the problem?
- . Are there times when the owner must also participate in the repair?
- . What is the frequency of inspections during the warranty period?

**I. *Corrective Action***

- . What are the consequences of noncompliance issues during the construction phase and during the operation period?
- . Do you have provisions that allow the warranty to be voided? For example, higher traffic volumes or loadings than initially anticipated.
- . How are disputes resolved between the owner and provider during the construction phase and during the operational period? Is this dispute resolution process different from nonwarranted projects?

**III. *Program and Project Evaluation***

**A. *Program Performance***

1. Are any comparisons available for performance of asphalt warranted pavements to that of nonwarranted pavements? Specifically, discuss long-term quality/performance measures, bid costs vs. engineering estimates, and warranted vs. nonwarranted asphalt pavement project costs in the area of unit bid costs, life cycle costs, and percent of pavement requiring repair.
2. Warranty contracting often allows for considerable innovation on the part of the contractor. Have innovations been realized from the use of asphalt pavement warranties? How do you analyze innovation prior to bids and/or after award of contract?

**B. *Project Performance***

1. The United States uses surface distress, ride quality, friction measures, composite pavement condition index, engineering properties, delamination, cracking, debonding, and other performance indicators as assessment tools throughout the life cycle of the product.
2. What are the criteria that your country uses to measure asphalt pavement warranty performance on individual projects?
3. How are performance thresholds determined?
4. How do your testing methods account for the aging that has occurred in the asphalt?
5. What tools or equations have been developed to predict performance as it relates to the warranty requirements?
6. What reference guide and/or equipment are used to determine the conditions and measure the performance?
7. How long are the pavement evaluation sections within the project?
8. How is industry input solicited and incorporated into warranty specifications? (Industry - materials suppliers, contractors, fiduciary, trade associations, transportation facility owners, or all of the above)?

**C. *Case Studies and Contract Examples***

1. Can you provide a case history of a "typical" asphalt pavement warranty project? Examples of "successes" and "failures" would also be helpful.
2. Can you provide example contracts and/or contract language from successful warranty contracts?

# References

- American Association of State Highway and Transportation Officials. (2001).** "Primer on Contracting for the Twenty-first Century." Report of the Contract Administration Task Force of the AASHTO Subcommittee on Construction. Fourth Edition.
- Anderson, S.D., and Russell, J.S. (1998).** "Guidelines for Warranty, Multi-Parameter and Best-Value Contracting." Report No. 451, National Cooperative Highway Research Program, Washington, D.C.
- British Highways Agency. (1997).** *DBFO—Value in Roads*. London, England.
- Carpenter, B., Fekpe, E., and Gopalakrishna, D. (2003).** "Performance-Based Contracting for the Highway Construction Industry: An Evaluation of the Use of Innovative Contracting and Performance Specification in Highway Construction." Final Report submitted to Koch Industries Inc., by Battelle, February 2003.
- Colorado Department of Transportation (CDOT). (2001).** "Cost-Benefit Evaluation Committee Materials and Workmanship Warranties for Hot Bituminous Pavement." Report No. CDOT-DTD-2001-18. Colorado Department of Transportation, Denver, Colorado.
- Federal Highway Administration (FHWA). (1990).** "1990 European Asphalt Study Tour (EAST)." Special report of the American Association of State Highway and Transportation Officials. Washington, D.C., June 1991.
- Federal Highway Administration (FHWA). (1994).** "FHWA Summary Report of the Contract Administration Techniques for Quality Enhancement Study Tour (CATQEST)." (<http://ntl.bts.gov/DOCS/catqest.html>, June 2002).
- Federal Highway Administration (FHWA). (2000).** Briefing on Warranty Clauses in Federal Aid Highway Contracts. (<http://www.fhwa.dot.gov/programadmin/contracts/warranty.htm>, June 2003).
- Federal Highway Administration (FHWA). (2002).** "2001 European Contract Administration Scan Final Report." Report No. FHWA-PL-03-002. International Technology Program, Federal Highway Administration, Washington D.C.
- Florida Department of Transportation. (2003).** Design-Build Contract Documents, Section 5-14, Contractor Guaranteed Project Features. (<http://www11.myflorida.com/construction/Design%20Build/DB%20Documents/warranty/guaranty031202.htm>, June 2003).
- Garza, J.M., and Voster, M.C. (2000).** "Assessment of Equivalent Cost for Highway Maintenance Activities Being Performed by VMS." Virginia Department of Transportation.
- Hamilton, William E. (2001).** "Transportation: Road Construction Warranties." Michigan House Fiscal Agency Legislative Briefing, Michigan Department of Transportation, 8 pages.
- Pavement Warranty Symposium – Policy, Development and Implementation. (2003).** Proceedings of a symposium sponsored by the Federal Highway Administration and the Michigan Department of Transportation Grand Rapids, Michigan, May 5-7, 2003.
- Perrot, J.-Y., and Chatelus, G., Editors. (2000).** *Financing of Major Infrastructure and Public Service Projects: Public-Private Partnership, Lessons from French Experience Throughout the World*. French Ministry of Public Works, Transport and Housing, Economic and International Affairs Division, Paris, France.
- Simonsen, P., and Thau, M. (2002).** "Pavement Performance Contracts: The Alternative Contractual Relationship." *Roads, PIARC, World Road Association*, No. 315, pp. 45-56.

# European Host Representatives

## Denmark

### Per Andersen

Ministry of Transport  
Road Directorate  
Niels Juels Gade 13  
DK-1059 Copenhagen  
Denmark

### Ulla Susanne Baltzer

Ministry of Transport  
Research and Testing Dept.  
Niels Juels Gade 13  
DK-1059 Copenhagen  
Denmark  
Telephone: +45 4630 7000  
Fax: +45 4630 7105  
E-mail: [sub@vd.dk](mailto:sub@vd.dk)

### Per Frandsen

Asfaltindustrien  
Managing Director  
Lindholmsholmen 91  
DK-2650 Hvidovre  
Denmark  
Telephone: +45 3678 0822  
Fax: +45 3677 1208  
E-mail: [ai@asfaltindustrien.dk](mailto:ai@asfaltindustrien.dk)

### Per Anders Kargo

ICC Danmark A/S  
Laboratoriefachef  
Produktteknisk Afd.  
Lindby Industrivej 8  
DK-2600 Glostrup  
Denmark  
Telephone: +43 26 15 88  
Fax: +43 45 20 22  
E-mail: [ako@ncc.dk](mailto:ako@ncc.dk)

### Per H. Simonsen

Ministry of Transport  
Contracts Manager  
Niels Juels Gade 13  
DK-1059 Copenhagen  
Denmark  
Telephone: +45 3341 3333  
Fax: +45 3393 1592  
E-mail: [psi@vd.dk](mailto:psi@vd.dk)

### Mikael Thau

Lotcon  
Consultant  
Lotcon ApS  
Roegen Hedevej 148  
DK-8472 Sporup  
Denmark  
Telephone: +45 2622 8146  
Fax: +45 8696 8133  
E-mail: [mt@lotcon.dk](mailto:mt@lotcon.dk)

### Bo Wamsler

Ministry of Transport  
Research and Testing Dept.  
Danish Road Institute  
Elisagaardsvej 5  
DK-4000 Roskilde  
Denmark  
Telephone: +45 4630 7000  
Fax: +45 4636 7864  
E-mail: [bow@vd.dk](mailto:bow@vd.dk)

## Germany

### Dr. Bernd Giesebrecht

German Federal Ministry of  
Transport  
Deputy  
Robert-Schauman-Platz 1  
Bonn-Bad D-53175  
Godesburg  
Germany  
Telephone: 011 49 228 300 5142  
E-mail: [bernd.giesebrecht@brnvw.bund.de](mailto:bernd.giesebrecht@brnvw.bund.de)

### Georg Holl

German Federal Ministry of  
Transport  
Deputy  
Robert-Schauman-Platz 1  
Bonn-Bad D-53175  
Godesburg  
Germany  
E-mail: [georg.holl@bmvbw.bund.de](mailto:georg.holl@bmvbw.bund.de)

### Ernst Eggers

Geschäftsführer  
Landesbetrieb Straßen und  
Verkehr Rheinland-Pfalz  
Kastorhof 2  
Koblenz 56068  
Germany  
Telephone: (0261) 3029-1101  
Fax: (0261) 3029-1170  
E-mail: [ernst.eggers@sv.rlp.de](mailto:ernst.eggers@sv.rlp.de)

**Horst Oltersdorf**

Geschäftsführer  
Landesbetrieb Strassen und  
Verkehr Rheinland-Pfalz  
Kastorhof 2  
Koblenz 56068  
Germany  
Telephone: (0261) 3029-1191  
Fax: (0261) 3029-1170

**Alfred Dreher**

Abteilungsdirektor  
Landesbetrieb Strassen und  
Verkehr Rheinland-Pfalz  
Kastorhof 2  
Koblenz 56068  
Germany  
Telephone: (0261) 3029-1108  
Fax: (0261) 3029-1170  
E-mail: [alfred.dreher@lsv.rlp.de](mailto:alfred.dreher@lsv.rlp.de)

**Guido Schuster**

Bundesministerium Strassen und  
Verkehr  
Oberbaurat  
Landesbetrieb Strassen und  
Verkehr Rheinland-Pfalz  
Kastorhof 2  
Koblenz 56068  
Germany  
Telephone: (0261) 3029-1470  
Fax: (0261) 3029-1340  
E-mail: [abt5.ref.telematik@lsv.rlp.de](mailto:abt5.ref.telematik@lsv.rlp.de)

**Spain**

**Guillermo Albrect Arquer**

Instituto Technico de la Vialidad Y  
Del Transporte  
General Manager  
Ingeniero de Carninos, Canales Y  
Puertos  
Parque Empresarial Barajas Park  
San Severo, 18  
Madrid 28042  
Spain  
Telephone: 34 91 329 44 77  
Fax: 34 91 329 40 58  
E-mail: [albrectg@intevia.es](mailto:albrectg@intevia.es)

**Jose Del Pino Alvarez**

GruPisa  
Ingeniero de Caminos Canales y  
Puertos, Division de Conservacion  
y Expoltacion  
Avda, de la Fuente Nueva, 14  
San Sebastian de Los Reyes  
Madrid 28700  
Spain  
Telephone: 91 658 72 72  
Fax: 91 651 90 51  
E-mail: [grupisa@grupisa.es](mailto:grupisa@grupisa.es)

**Juan Manuel Sanchez Moreira**

M-40 Conservacion  
Jefe Coex  
Ctra, El Pardo  
Madrid KM 0,5  
Madrid 28035  
Spain  
Telephone: 91 386 01 25  
Fax: 91 316 68 79  
E-mail: [m40@grupisa.es](mailto:m40@grupisa.es)

**Jesus Martinez Perez**

Autopista Trados 45  
Director General  
Ctra, M-203 P.K. 0,280  
Apdo. De Correos 92010  
Madrid 28080  
Spain  
Telephone: 91 305 20 14  
Fax: 91 332 35 22

**A Navarro**

NC Sweett Project Management  
Calle Manzanares, 4  
Madrid 28005  
Spain  
Telephone: 91 208 08 00  
Fax: 91 208 08 03  
E-mail: [anavarro@soluzion.com](mailto:anavarro@soluzion.com)

**Adolfo Sanz**

Spanish Road Association  
International Director  
Goya, 23, 4 D  
Madrid 28001  
Spain  
Telephone: 34 91 577 99 72  
Fax: 34 91 576 65 22  
E-mail: [asanz@aecarretara.com](mailto:asanz@aecarretara.com)

**B Walker**

NC Sweett Project Management  
Calle Manzanares, 4  
Madrid 28005  
Spain  
Telephone: 91 208 08 00  
Fax: 91 208 08 03  
E-mail: [bwalker@soluzion.com](mailto:bwalker@soluzion.com)

**The United Kingdom**

**Andy Brown**

Highways Agency  
Senior Pavement Engineer  
7W, City House  
New Station Street  
Leeds, LS1 4CE  
United Kingdom  
Telephone: +44 0113 283 5451  
E-mail: [andy.brown1@highways.gsi.gov.uk](mailto:andy.brown1@highways.gsi.gov.uk)

**Ray Clark**

Highways Agency  
Romney House  
43 Marsham Street  
London SW1P 3HW  
United Kingdom  
Telephone: +44 020 7081 7914  
E-mail: [ray.clark@highways.gsi.gov.uk](mailto:ray.clark@highways.gsi.gov.uk)

**Ginny Clarke**

Highways Agency  
Chief Highway Engineer, Director-  
Safety, Standards & Research  
Room B153A, Romney House  
43 Marsham Street  
London SW1P 3HW  
United Kingdom  
Telephone: +44 020 7081 7710  
Fax: +44 020 7081 7664  
E-mail: [ginny.clarke@highways.gsi.gov.uk](mailto:ginny.clarke@highways.gsi.gov.uk)

**ob Collis**

RL Limited  
 lead of Design and Maintenance  
 Old Workingham Road  
 Rowthorne  
 Berkshire RG45 6AU  
 United Kingdom  
 Telephone: +44 01344 770474  
 Fax: +44 01344 770356  
 E-mail: [bcollis@trl.co.uk](mailto:bcollis@trl.co.uk)

**John Fishwick**

Manson Construction Projects  
 Commercial Manager  
 The Ridge  
 Chipping Sodbury  
 Bristol BS37 6AY  
 United Kingdom  
 Telephone: 01454 338650  
 Fax: 01454 338660

**John Gardner**

JK Highways  
 Construction Manager  
 PO Box 15  
 Banbury, OX16 3YT  
 United Kingdom  
 Telephone: 01202 530542  
 Fax: 01202 533064  
 E-mail: [john.gardner@ukhighways.co.uk](mailto:john.gardner@ukhighways.co.uk)

**Richard Hall**

Foster Yeoman Contracting  
 Limited  
 Contracts Director  
 Cobins Wharf  
 Grove Road  
 Northfleet  
 Kent DA11 9AX  
 United Kingdom  
 Telephone: 01474 333186  
 Fax: 01474 333581  
 E-mail: [ro.hall@foster-yeoman.co.uk](mailto:ro.hall@foster-yeoman.co.uk)

**Awtar Jandu**

Highways Agency  
 Group Manager  
 Room 3/48, Christopher House  
 Southwark Street  
 London SE1 0TE  
 United Kingdom  
 Telephone: +44 020 7921 4388  
 Fax: +44 020 7921 4631  
 E-mail: [awtar.jandu@highways.gsi.gov.uk](mailto:awtar.jandu@highways.gsi.gov.uk)

**Wyn Lloyd**

Highways Agency  
 Pavement Engineering Group  
 Room B355, Romney House  
 43 Marsham Street  
 London SW1P 3HW  
 United Kingdom  
 Telephone: +44 020 7081 7562  
 Fax: +44 020 7081 7041  
 E-mail: [wyn.Lloyd@highways.gsi.gov.uk](mailto:wyn.Lloyd@highways.gsi.gov.uk)

**Dr Mike Nunn**

TRL Limited  
 Old Workingham Road  
 Crowthorne  
 Berkshire RG45 6AU  
 United Kingdom  
 Telephone: +44 01344 770210  
 Fax: +44 01344 770356  
 Email: [mnumm@trl.co.uk](mailto:mnumm@trl.co.uk)

**David Powell**

TRL Limited  
 Director, Infrastructure  
 Old Workingham Road  
 Crowthorne  
 Berkshire RG45 6AU  
 United Kingdom  
 Telephone: +44 01344 770492  
 Fax: +044 01344 770880  
 E-mail: [dpowell@trl.co.uk](mailto:dpowell@trl.co.uk)

**Ramesh Sinhal**

Highways Agency  
 Quality Services  
 Pavement Engineering Group  
 Room B153A, Romney House  
 43 Marsham Street  
 London SW1P 3HW  
 United Kingdom  
 Telephone: +44 020 7081 7562  
 Fax: +44 020 7081 7041  
 E-mail: [ramesh.sinhal@highways.gsi.gov.uk](mailto:ramesh.sinhal@highways.gsi.gov.uk)

**Mike Wilson**

Highways Agency  
 Team Leader  
 Operational Policy  
 Room A330, Romney House  
 43 Marsham Street  
 London SW1P 3HW  
 United Kingdom  
 Telephone: +44 020 7081 7837  
 E-mail: [mike.wilson@highways.gsi.gov.uk](mailto:mike.wilson@highways.gsi.gov.uk)

**Sweden****Lars Jacobsson**

Operation and Maintenance  
 Vägverket - Swedish National  
 Road Administration  
 S-781 87 Borlänge, Sweden  
 Telephone: +46 243 751 21  
 Fax: +46 243 754 20  
 E-mail: [lars.jacobsson@vv.s](mailto:lars.jacobsson@vv.s)



Office of International Programs  
FHWA/US DOT (HPIP)  
400 Seventh Street, SW  
Washington, DC 20590

Tel: (202) 366-9636  
Fax: (202) 366-9626

[international@fhwa.dot.gov](mailto:international@fhwa.dot.gov)  
[www.international.fhwa.dot.gov](http://www.international.fhwa.dot.gov)

Publication No. FHWA-PL-04-002HPIP/11-03(3M)EW